

SUGGESTED RETAIL PRICE LIST

Effective AUGUST 1, 2020



**CO
UC
EE
BE**

40 YEARS STRONG!



Since 1980 BEFCO has developed, tested, manufactured and improved lawn and ground care attachments right here in North Carolina. BEFCO's commitment to design and to manufacture all key components in our machines has earned the company its reputation for high quality manufacturing with no compromise.

Anyone who has owned a BEFCO unit will tell you that it is an investment that repays for itself many times over throughout the years. Customers know that when purchasing a BEFCO implement, support is always available if assistance is ever needed. This is why when people ask us what BEFCO stands for, we say

"Best Equipment a Farmer Can Own"!



GROOMING MOWERS

| | |
|---------------------------|----|
| CYCLONE C30-CE5 | 2 |
| CYCLONE C30 | 4 |
| CYCLONE C50 | 6 |
| CYCLONE C70 | 8 |
| CYCLONE FLEX | 10 |
| CYCLONE SUPER-FLEX | 12 |

FLAIL MOWERS, FLAIL SHREDDERS

| | |
|------------------------|----|
| HURRICANE H40 | 14 |
| HURRICANE H40-S | 16 |
| HURRICANE H70 | 18 |
| DESTROYER D90 | 20 |

CHIPPERS

| | |
|-------------------|----|
| BUSHMASTER | 22 |
|-------------------|----|

ROTARY CUTTERS

| | |
|--------------------|----|
| TORNADO BRC | 23 |
| TORNADO RMD | 24 |
| TORNADO RHD | 25 |

ROTARY TILLERS

| | |
|----------------------|----|
| TILL-RITE T30 | 26 |
| TILL-RITE T40 | 28 |
| TILL-RITE T50 | 30 |
| TILL-RITE T60 | 32 |
| TILL-RITE T70 | 34 |

SEEDERS, OVERSEEDERS

| | |
|-------------------|----|
| GREEN-RITE | 36 |
| SEED-RITE | 38 |

POST HOLE DIGGERS

| | |
|-------------|----|
| MOLE | 40 |
|-------------|----|

FERTILIZER SPREADERS

| | |
|----------------------|----|
| BABY-HOP | 42 |
| POLY BABY-HOP | 43 |
| HOP | 44 |
| POLY-HOP | 45 |
| TURBO-HOP 301 | 46 |
| TURBO-HOP 303 | 46 |

GROUND ENGAGE EQUIPMENT

| | |
|----------------------------|----|
| CORE AERATOR SD | 48 |
| CORE AERATOR HD | 49 |
| SOIL PULVERIZERS SD | 50 |
| SOIL PULVERIZERS HD | 51 |
| BOX SCRAPER | 52 |
| GRADING SCRAPER | 53 |
| REAR BLADE SD | 54 |
| REAR BLADE HD | 55 |
| LANDSCAPE RAKE | 56 |

HAY EQUIPMENT

| | |
|-------------------------------|----|
| SICKLE BAR MOWERS | 57 |
| FINGER WHEEL RAKES | 58 |
| FINGER WHEEL "V" RAKES | 59 |
| TEDDERS | 60 |
| WINDROWER RAKES | 61 |

QUICK HITCH

| | |
|--------------------|----|
| QUICK HITCH | 62 |
|--------------------|----|


OPTIONALS

CYCLONE C30-CE5




Three spindle engine driven grooming mower

- Ideal for lawn tractors, ATVs & UTVs.
- Rear discharge.
- 4 solid rubber tires to guarantee a perfectly level cut.
- Stamped steel reinforced wheel arm attached by 5 bolts for maintaining a consistent cutting height.
- Spindle shafts greased from the top for easy service.
- Hitch: Cat. 1 ball for rear mounting and 2" receiver hitch for front mounting.
- 10 gauge reinforced mower deck.
- Cutting heights: from 1" to 4".
- Heavy duty reinforced belts (BX).
- Powerful 11.5 HP Briggs & Stratton (OHV) engine with centrifugal clutch.
- 3 quart fuel tank.
- Safety kill switch.
- Heavy duty, one piece, balanced steel pulleys.
- Stamped steel wheel yokes.

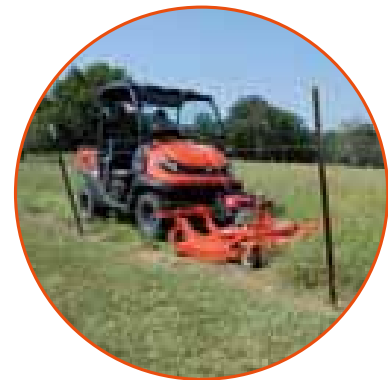

STANDARD

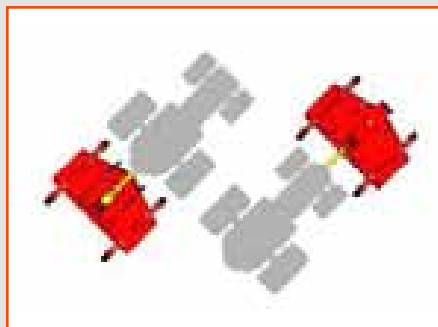

Reversible hitch for front or rear mounting



Capable of being center mounted or offset left or right



Up to 48" offset

C30-CE5H



| in | in | in | lbs | lbs | rpm | fpm | N° | in | N° | N°-in |
|----|----|----|-----|-----|-----|-----|----|----|----|-------|
|----|----|----|-----|-----|-----|-----|----|----|----|-------|

| | | | | | | | | | | | |
|-----|-----|-------|-----|-----|-------|--------|---|-------|------|-------------|------------------------------|
| 60" | 62" | 0-48" | 388 | 495 | 2,673 | 14,173 | 3 | 1"-4" | 2 BX | 4-8.4"x3.2" | Briggs & Stratton 11.5 HP |
|-----|-----|-------|-----|-----|-------|--------|---|-------|------|-------------|------------------------------|

\$ 3,436



Front mount application with 2" receiver hitch



Height adjustment bar

CYCLONE C30

16-30 HP (12-22 KW)
540 rpm - cat. 1




Rear discharge three spindle grooming mower

- Highly engineered & rugged gearbox.
- Front & rear tractor mounting.
- 4 rubber swivel tires to guarantee a perfectly level cut.

- Floating 3 point linkage, cat. 1.
- 10 gauge reinforced mower deck.
- Stamped steel reinforced wheel arm attached by 5 bolts for maintaining a consistent cutting height.
- Stamped steel wheel yokes.
- Cutting heights: from 1" to 4".
- Spindle shafts greased from the top for easy service.
- Heavy duty reinforced belt (BX).
- Heavy duty, one piece, balanced steel pulleys.
- Heavy duty shielded PTO shaft (1 3/8" ASAE cat. 2).




Heavy duty reinforced belt (BX)
with automatic belt tensioner



Axial grease fittings for easy and
accurate lubrication

STANDARD



Reversible three point hitch for
front or rear tractor mounting



Gearboxes manufactured by Befco















Stamped steel wheel arms attached by
five bolts



Choice of hard or air tires



| MODEL | | C30-RD4H | C30-RD5H | C30-RD6H | C30-RD4A | C30-RD5A | C30-RD6A |
|--|--------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| | | HARD TIRES | | | AIR TIRES | | |
|  | HP | 16-30 | 20-30 | 25-30 | 16-30 | 20-30 | 25-30 |
|  | in | 48" | 60" | 72" | 48" | 60" | 72" |
|  | in | 51" | 62" | 74" | 51" | 62" | 74" |
|  | lbs | 340 | 375 | 440 | 329 | 364 | 429 |
|  | lbs | 440 | 490 | 570 | 429 | 479 | 559 |
|  | rpm | 3,037 | 2,803 | 2,278 | 3,037 | 2,803 | 2,278 |
|  | fpm | 13,188 | 14,763 | 14,566 | 13,188 | 14,763 | 14,566 |
|  | N° | 3 | 3 | 3 | 3 | 3 | 3 |
|  | in | 1"-4" | 1"-4" | 1"-4" | 1"-4" | 1"-4" | 1"-4" |
|  | N° | 1 BX | 1 BX | 1 BX | 1 BX | 1 BX | 1 BX |
|  | N°-in | 4-8.4"x3.2" | 4-8.4"x3.2" | 4-8.4"x3.2" | 4-9"x3.5" | 4-9"x3.5" | 4-9"x3.5" |
|  | 1 3/8" | ASAE cat. 2 | ASAE cat. 2 | ASAE cat. 2 | ASAE cat. 2 | ASAE cat. 2 | ASAE cat. 2 |
|  | | \$ 2,677 | \$ 2,813 | \$ 3,065 | \$ 2,649 | \$ 2,785 | \$ 3,037 |



CYCLONE C50

20-50 HP (15-37 KW)
540 rpm - cat. 1




Rear discharge three spindle grooming mower


- Highly engineered & rugged gearbox with cooling fins.
- Spiral gears guarantee strength and quietness.
- Cutting heights: from 1" to 5".
- Front & rear tractor mounting.
- 4 rubber swivel tires with bearings to guarantee a perfectly level cut.
- Stamped steel reinforced wheel arm attached by 8 bolts for maintaining a consistent cutting height.
- Floating 3 point linkage, cat. 1.
- 8 gauge reinforced mower deck.

- Spindle shafts greased from the top for easy service.
- Safety chain shield standard.
- Two heavy duty reinforced belts (SPBX).
- Heavy duty, one piece, balanced steel pulleys.
- Heavy duty shielded PTO shaft (1 3/8" ASAE cat. 3).
- Stamped steel wheel yokes.

STANDARD



Reversible three point hitch for front & rear tractor mounting

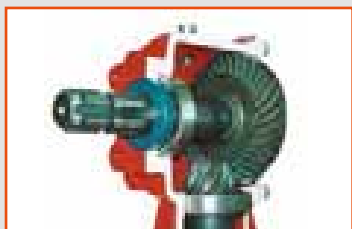

Gearboxes, manufactured by Befco, equipped with spiral gears ensure better power transmission, increase longevity and reduce noise
















Choice of standard blades, high lift blades, mulching blades and flat blades




Choice of hard or air tires with ball bearings




| MODEL | C50-RD5H | C50-RD6H | C50-RD7H | C50-RD5A | C50-RD6A | C50-RD7A |
|--|-----------------|-----------------|--------------|-----------------|-----------------|-----------------|
| | HARD TIRES | | | AIR TIRES | | |
|  HP | 20-50 | 25-50 | 30-50 | 20-50 | 25-50 | 30-50 |
|  in | 60" | 72" | 84" | 60" | 72" | 84" |
|  in | 62" | 74" | 86" | 62" | 74" | 86" |
|  lbs | 550 | 600 | 690 | 534 | 584 | 674 |
|  lbs | 665 | 730 | 835 | 649 | 714 | 819 |
|  rpm | 3,210 | 2,605 | 2,195 | 3,210 | 2,605 | 2,195 |
|  fpm | 16,929 | 16,732 | 16,338 | 16,929 | 16,732 | 16,338 |
|  N° | 3 | 3 | 3 | 3 | 3 | 3 |
|  in | 1"-5" | 1"-5" | 1"-5" | 1"-5" | 1"-5" | 1"-5" |
|  N° | 2 SPBX | 2 SPBX | 2 SPBX | 2 SPBX | 2 SPBX | 2 SPBX |
|  N°-in | 4-10"x3.2" | 4-10"x3.2" | 4-10"x3.2" | 4-11"x4" | 4-11"x4" | 4-11"x4" |
|  1 3/8" | ASAE cat. 3 | ASAE cat. 3 | ASAE cat. 3 | ASAE cat. 3 | ASAE cat. 3 | ASAE cat. 3 |
| \$ | \$ 3,722 | \$ 3,935 | 4,599 | \$ 3,674 | \$ 3,887 | \$ 4,551 |



Axial grease fittings for easy and accurate spindle lubrication



Two heavy duty reinforced belts (SPBX) with manual tensioner provide over 180° coverage of all pulleys and reduce belt maintenance





CYCLONE C70

30-70 HP (22-52 KW)
540 rpm - cat. 1













Heavy duty rear discharge three spindle grooming mower

- Highly engineered & rugged gearbox with cooling fins.
- Cutting heights: from 1.3" to 5.3".
- Front & rear tractor mounting.
- 4 rubber swivel tires with bearings to guarantee a perfectly level cut.
- Stamped steel reinforced wheel arm attached by 8 bolts for maintaining a consistent cutting height.
- Floating 3 point linkage, cat. 1.
- Front antiscalping roller standard.


- 8 gauge reinforced mower deck.
- Three spindle rotors with free swinging blades per rotor.
- Spindle shafts greased from the top for easy service.
- Two heavy duty reinforced belts (CX).
- Heavy duty, one piece, balanced steel pulleys.
- Heavy duty shielded PTO shaft (1 3/8" ASAE cat. 4).
- Safety chain shield standard.
- Stamped steel wheel yokes.



| MODEL | | C70-090H | C70-110H | C70-090A | C70-110A |
|---|--------|-----------------|-----------------|-----------------|-----------------|
| | | HARD TIRES | | AIR TIRES | |
|  | HP | 30-70 | 40-70 | 30-70 | 40-70 |
|  | in | 90" | 110" | 90" | 110" |
|  | in | 92" | 112" | 92" | 112" |
|  | lbs | 1,237 | 1,390 | 1,137 | 1,290 |
|  | lbs | 1,267 | 1,420 | 1,167 | 1,320 |
|  | rpm | 1,750 | 1,562 | 1,750 | 1,562 |
|  | fpm | 14,106 | 14,998 | 14,106 | 14,998 |
|  | N° | 6 | 6 | 6 | 6 |
|  | in | 1.3"-5.3" | 1.3"-5.3" | 1.3"-5.3" | 1.3"-5.3" |
|  | N° | 2 CX | 2 CX | 2 CX | 2 CX |
|  | N°-in | 4-12"x4" | 4-12"x4" | 4-13"x6.5" | 4-13"x6.5" |
|  | 1 3/8" | ASAE cat. 4 | ASAE cat. 4 | ASAE cat. 4 | ASAE cat. 4 |
| \$ | | \$ 7,073 | \$ 8,361 | \$ 7,233 | \$ 8,521 |



STANDARD




Reversible three point hitch for front or rear tractor mounting



Gearboxes manufactured by Befco



Stamped steel wheel arms attached by eight bolts



Choice of hard or air tires



Axial grease fittings for easy and accurate spindle lubrication



Chains provide safety from thrown objects



Standard front antiscalping roller



Rotor with free swinging blades

CYCLONE FLEX

25-80 HP (19-60 KW)
540 rpm















Pull type gang grooming mowers


- Heavy duty transport frame.
- Cutting heights: from 1" to 5".
- Pull type mower with high flotation transport tires (20.5"x8"x10").
- Single action hydraulic folding wing system for easy transport & storage.
- Transport width 8'4" max.
- Telescoping wings that allow for adjustable cutting width to increase or decrease mower overlap.
- Constant velocity driveline with slip clutch (1 3/8" ASAE cat. 6).
- Stamped steel reinforced wheel arm attached by 8 bolts for maintaining a consistent cutting height.
- 3 front antiscalping rollers standard.
- Safety chain shield standard.
- 8 gauge reinforced mower decks.
- Remote safety locks for local transport & deck kick out attachments.
- Completely independent free floating mowing decks for a perfect cut on uneven terrain.
- Unique double pivot floating linkage.
- 12 rubber tires with bearings (4 per deck) to guarantee a perfectly level cut.
- Heavy duty, one piece, balanced steel pulleys.
- Two heavy duty reinforced belts per deck (SPBX).
- Single unit gearboxes with cooling fins.
- Spiral gears guarantee strength and quietness.
- Stamped steel wheel yokes.
- Single unit driveline with shear pin safety.

STANDARD



Gearboxes, manufactured by Befco, equipped with spiral gears ensure better power transmission, increase longevity and reduce noise

| MODEL | 312-FLXH | 315-FLXH | 317-FLXH | 312-FLXA | 315-FLXA | 317-FLXA |
|--|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| | HARD TIRES | | | AIR TIRES | | |
|  HP | 25-80 | 30-80 | 35-80 | 25-80 | 30-80 | 35-80 |
|  ft | 12' | 15' | 17' | 12' | 15' | 17' |
|  in | 91" | 97" | 100" | 91" | 97" | 100" |
|  in | 74" | 92" | 103" | 74" | 92" | 103" |
|  lbs | 2,742 | 2,874 | 2,995 | 2,694 | 2,826 | 2,947 |
|  N° | 9 | 9 | 9 | 9 | 9 | 9 |
|  in | 1"-5" | 1"-5" | 1"-5" | 1"-5" | 1"-5" | 1"-5" |
|  N° | 6 SPBX | 6 SPBX | 6 SPBX | 6 SPBX | 6 SPBX | 6 SPBX |
|  N°-in | 12-10"x3.2" | 12-10"x3.2" | 12-10"x3.2" | 12-11"x4" | 12-11"x4" | 12-11"x4" |
|  N°/ft | 2-4' mowers & 1-5' mower | 2-5' mowers & 1-6' mower | 3-6' mowers | 2-4' mowers & 1-5' mower | 2-5' mowers & 1-6' mower | 3-6' mowers |
|  1 3/8" | ASAE cat. 6 cv, slip clutch | ASAE cat. 6 cv, slip clutch | ASAE cat. 6 cv, slip clutch | ASAE cat. 6 cv, slip clutch | ASAE cat. 6 cv, slip clutch | ASAE cat. 6 cv, slip clutch |
|  \$ | \$ 19,494 | \$ 21,283 | \$ 22,089 | \$ 19,350 | \$ 21,139 | \$ 21,945 |

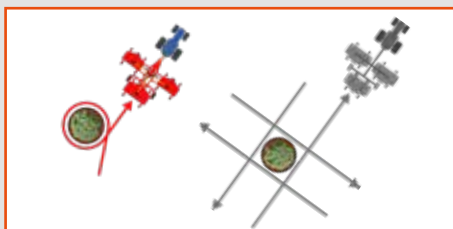

The frame design along with our CV driveline allows Flex mowers to circle trees and obstacles in one pass where competitors require multiple passes.



Hexagonal yokes on front tires of rear mower deck to prevent slippage on slopes



Standard front antiscaling roller



CYCLONE SUPER-FLEX



35-80 HP (26-60 KW)
540 rpm













Pull type gang grooming mowers

- Extra heavy duty transport frame.
- Cutting heights: from 1" to 5".
- Pull type mower with high flotation transport tires (23"x10.5"x12").
- Single action hydraulic folding wing system for easy transport & storage.
- 3 front antiscalping rollers standard.
- Telescoping wings that allow for adjustable cutting width to increase or decrease mower overlap.
- Constant velocity driveline with slip clutch (1 3/8" ASAE cat. 6).
- Stamped steel reinforced wheel arm attached by 8 bolts for maintaining a consistent cutting height.
- Stamped steel wheel yokes.
- 8 gauge reinforced mower deck.



- Safety chain shield standard.
- Single unit driveline with shear pin safety.
- Remote safety locks for local transport & deck kick out attachments.
- Completely independent free floating mowing decks for a perfect cut on uneven terrain.
- Unique double pivot floating linkage.
- 12 rubber tires with bearings (4 per deck) to guarantee a perfectly level cut.
- Wide high flotation air tires 13"x6.5".
- Heavy duty, one piece, balanced steel pulleys.
- Two heavy duty reinforced belts per deck (SPBX).
- Single unit gearboxes with cooling fins.
- Spiral gears guarantee strength and quietness.



| MODEL | | 412-SFL | 415-SFL | 417-SFL | 420-SFL |
|---|--------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
|  | HP | 35-80 | 40-80 | 45-80 | 50-80 |
|  | ft | 12' | 15' | 17' | 20' |
|  | in | 91" | 97" | 100" | 114" |
|  | in | 74" | 92" | 103" | 116" |
|  | lbs | 3,090 | 3,267 | 3,438 | 3,747 |
|  | N° | 9 | 9 | 9 | 9 |
|  | in | 1"-5" | 1"-5" | 1"-5" | 1"-5" |
|  | N° | 6 SPBX | 6 SPBX | 6 SPBX | 6 SPBX |
|  | N°-in | 12-13"x6.5" | 12-13"x6.5" | 12-13"x6.5" | 12-13"x6.5" |
|  | N°-ft | 2-4' mowers & 1-5' mower | 2-5' mowers & 1-6' mower | 3-6' mowers | 3-7' mowers |
|  | 1 3/8" | ASAE cat. 6 cv, slip clutch | ASAE cat. 6 cv, slip clutch | ASAE cat. 6 cv, slip clutch | ASAE cat. 6 cv, slip clutch |
|  | | \$ 22,735 | \$ 23,905 | \$ 25,915 | \$ 29,254 |



Heavy duty center-splitter gearbox



Hexagonal yokes on front tires of rear mower deck prevent slippage on slopes

STANDARD



Double pivot floating linkage for a perfect cut on uneven terrain



Telescopic wings that allow for adjustable cutting width to increase or decrease mower overlap




Gearboxes, manufactured by Befco, equipped with spiral gears to increase strength and quietness



Air tires 13"x6.5"





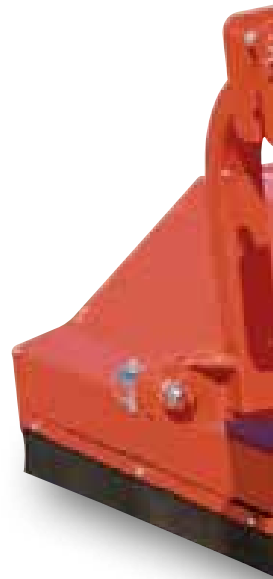







HURRICANE H40

16-40 HP (12-30 KW)
540 rpm - cat. 1




Flail mower

- Cutting heights: from 1" to 5".
- Choice of fine cut blades at 90° angles, reverse "Y" blades, paddle blades or hammer type blades.
- Dethatching blades available.
- Adjustable cutting height roller with scraper.
- Heavy duty shielded PTO shaft (1 3/8" ASAE cat. 3).
- Sealed rotor bearings.
- Front & rear tractor mounting.
- Electronically balanced rotor.
- Heavy duty, one piece, balanced steel pulleys.
- 2 Heavy duty reinforced notched belts (SPBX).
- Automatic belt tensioner.
- 3 point linkage, cat. 1.
- Floating top link.
- Highly engineered & rugged gearbox.
- Offset from center: 3" on H40-048, 8.5" on H40-060, & 6.5" on H40-072.
- Rubber safety shielding.

| MODEL | | H40-048 | H40-060 | H40-072 |
|--|--------|-----------------|-----------------|-----------------|
|  | HP | 16-40 | 20-40 | 25-40 |
|  | in | 48" | 60" | 72" |
|  | in | 54" | 64" | 76" |
|  | lbs | 418 | 456 | 528 |
|  | lbs | 556 | 593 | 638 |
|  | rpm | 2,278 | 2,278 | 2,278 |
|  | fpm | 8,858 | 8,858 | 8,858 |
|  | N° | 48 | 64 | 76 |
|  | in | 1"-5" | 1"-5" | 1"-5" |
|  | N° | 2 SPBX | 2 SPBX | 2 SPBX |
|  | 1 3/8" | ASAE cat. 3 | ASAE cat. 3 | ASAE cat. 3 |
|  | | \$ 3,560 | \$ 3,816 | \$ 4,199 |



STANDARD

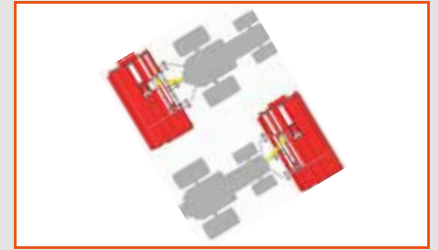

Reversible three point hitch for front or rear tractor mounting



Gearbox manufactured by Befco



Choice of fine cut blades, dethatching blades, reverse 'Y' blades, paddle blades or hammer type blades



Double belt transmission with automatic belt tensioner

HURRICANE H40-S













16-40 HP (12-30 KW)
540 rpm - cat. 1



Side-shift flail mower


- Cutting heights: from $\frac{3}{4}$ " to 2 $\frac{3}{8}$ ".
- Manual or optional hydraulic side-shift up to 16".
- Dual rear roller mounting position, inside or outside the cutting chamber.
- Manual belt tensioner without spring loaded idlers.
- Choice of fine cut blades at 90° angles, reverse "Y" blades, paddle blades or hammer type blades.
- Dethatching blades available.
- Adjustable cutting height roller with scraper or self cleaning roller when mounted inside the cutting chamber.
- Heavy duty shielded PTO shaft (1 $\frac{3}{8}$ " ASAE cat. 3).
- Sealed rotor bearings.
- Front & rear tractor mounting.
- Heavy duty, one piece, balanced steel pulleys.
- 2 Heavy duty reinforced notched belts (SPBX).
- 3 point linkage, cat. 1.
- Standard front rubber safety shielding or optional front steel deflectors.




| MODEL | | H40-S48 | H40-S60 | H40-S72 |
|--|------|-----------------|-----------------|-----------------|
|  | HP | 16-40 | 20-40 | 25-40 |
|  | in | 48" | 60" | 72" |
|  | in | 54" | 64" | 76" |
|  | in | 35" | 46" | 58" |
|  | lbs | 552 | 624 | 697 |
|  | lbs | 690 | 762 | 835 |
|  | rpm | 2,278 | 2,278 | 2,278 |
|  | fpm | 8,858 | 8,858 | 8,858 |
|  | N° | 48 | 64 | 76 |
|  | in | ¾"-2 ¾" | ¾"-2 ¾" | ¾"-2 ¾" |
|  | N° | 2 SPBX | 2 SPBX | 2 SPBX |
|  | 1 ¾" | ASAE cat. 3 | ASAE cat. 3 | ASAE cat. 3 |
| \$ | | \$ 3,866 | \$ 4,173 | \$ 4,608 |



STANDARD

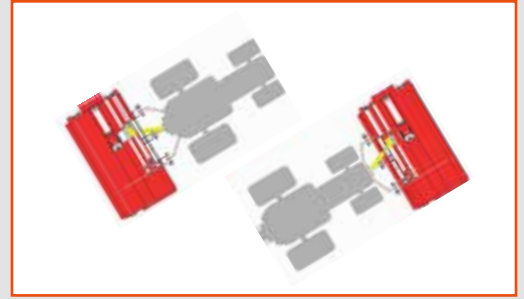

Reversible three point hitch for front or rear tractor mounting

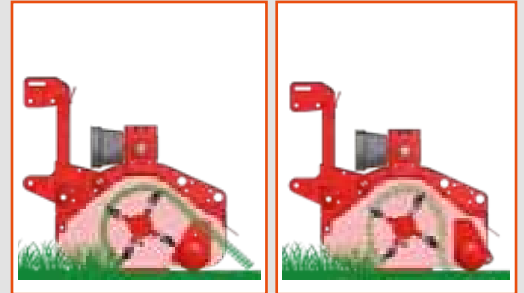

Dual rear roller mounting position, inside or outside the cutting chamber



Manual or hydraulic side-shift up to 16"



Manual belt tensioning



Choice of fine cut blades, detaching blades, reverse Y blades, paddle blades or hammer type blades

HURRICANE H70

30-70 HP (22-52 KW)
540 rpm - cat. 1 & 2














Flail mower

- Cutting heights: from 3/4" to 6".
- Choice of fine cut blades at 90° angles, reverse "Y" blades, paddle blades or hammer type blades.
- Dethatching blades available.
- Adjustable cutting height roller with scraper.
- Driveline with overrunning clutch (1 3/8" ASAE cat. 4).
- Highly engineered & rugged gearbox.
- Belt shield fender.
- Front & rear tractor mounting.
- Electronically balanced rotor.
- Heavy duty, one piece, balanced steel pulleys.




- 2 heavy duty reinforced notched belts (CX).
- Manual belt tensioner.
- 3 point linkage, cat. 1 & 2.
- Floating top link.
- Forward & reverse rotor rotation; clockwise is standard.
- Cast iron rotor supports with spherical roller bearings.
- Rubber safety shielding.
- Replaceable skids.



| MODEL | | H70-060 | H70-072 | H70-088 | H80-100 |
|---|--------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
|  | HP | 30-70 | 35-70 | 40-70 | 50-80 |
|  | in | 60" | 72" | 88" | 100" |
|  | in | 71" | 85" | 99" | 110" |
|  | lbs | 869 | 955 | 1,078 | 1,486 |
|  | lbs | 1,045 | 1,145 | 1,298 | 1,636 |
|  | rpm | 2,080 | 2,080 | 2,080 | 1,873 |
|  | fpm | 8,464 | 8,464 | 8,464 | 8,268 |
|  | N° | 64 | 80 | 96 | 104 |
|  | in | 3/4"-6" | 3/4"-6" | 3/4"-6" | 3/4"-6" |
|  | N° | 2 CX | 2 CX | 2 CX | 2 CX |
|  | 1 3/8" | ASAE cat. 4 overrunning clutch | ASAE cat. 4 overrunning clutch | ASAE cat. 4 overrunning clutch | ASAE cat. 6 overrunning clutch |
| \$ | | \$ 7,123 | \$ 7,611 | \$ 8,110 | \$ 11,707 |



STANDARD




Reversible three point hitch for front or rear tractor mounting



Gearboxes manufactured by Befco




Belt shield fender



Cast iron rotor support with spherical roller bearings



Replaceable side skids




Adjustable cutting height roller with scraper



Choice of fine cut blades, dethatching blades, reverse 'Y' blades, paddle blades or hammer type blades

DESTROYER D90

40-90 HP (30-67 KW)
540 rpm - cat. 1 & 2




Commercial flail shredder with hydraulic side-shift

- Cutting heights: from 3/4" to 5".
- 3 point linkage, cat. 1 & 2.
- Front & rear tractor mounting.
- Driveline with overrunning clutch (1 3/8" ASAE cat. 6).
- Belt driven transmission with four heavy duty XPBX type belts and manual belt tensioner.
- Hydraulic side-shift with dual remotes.
- 12" side-shift on 60" model 16" on 72" & 88" models.
- Heavy duty hammer type blades.
- 2" cutting capacity.
- Rotor diameter 5 1/4", 5/16" thick rotor tube.
- Height adjustment rear roller with scraper standard.
- Rear roller diameter 6 5/8", 3/16" thick rotor tube.

| MODEL | | D90-060 | D90-072 | D90-088 |
|---|------|-----------------------------------|-----------------------------------|-----------------------------------|
|  | HP | 40-90 | 50-90 | 60-90 |
|  | in | 60" | 72" | 88" |
|  | in | 69" | 81" | 96" |
|  | in | 43" | 54" | 61" |
|  | lbs | 1,257 | 1,345 | 1,491 |
|  | lbs | 1,360 | 1,450 | 1,600 |
|  | rpm | 1,961 | 1,961 | 1,961 |
|  | fpm | 8,268 | 8,268 | 8,268 |
|  | Nº | 16 | 20 | 24 |
|  | in | ¾"-5" | ¾"-5" | ¾"-5" |
|  | Nº | 4 XPBX | 4 XPBX | 4 XPBX |
|  | 1 ⅜" | ASAE cat. 6 overrunning clutch | ASAE cat. 6 overrunning clutch | ASAE cat. 6 overrunning clutch |
|  | | \$ 9,085 | \$ 9,634 | \$ 10,134 |



STANDARD

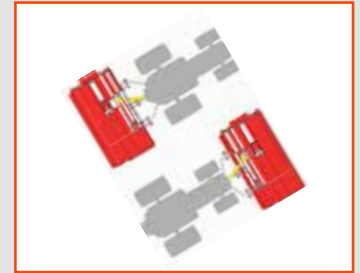


Reversible three point hitch for front or rear tractor mounting



Hammer type blades ideal for stalks up to 2" in diameter



Hydraulic cylinder for side shift

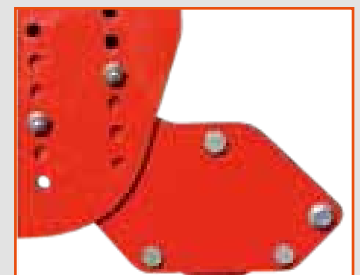

Rear roller for cutting height adjustment equipped with roller scraper



Four belts transmission



BUSHMASTER


30-50 HP (22-37 KW)
540 rpm - cat. 1




STANDARD



Variable speed feed roller














Heavy duty BX type belt driven transmission



Consistent and fine wood chips



360° adjustable blower pipe extension

| MODEL | BM6-800 | |
|---|---------|-------------|
|  | HP | 30-50 |
|  | lbs | 900 |
|  | lbs | 1,036 |
|  | | 360° swivel |
|  | N° | 6 BX |
|  | in | 6" |
|  | rpm | 1,512 |
|  | fpm | 9,252 |
|  | N° | 2 |
|  | 1 3/8" | ASAE cat. 4 |
|  | | \$ 8,669 |

Wood chipper

- Variable speed feed roller 70 or 45 fpm.
- Drum style chipping wheel.
- Two knives (7.5"x3"x3/8") modified A8 tool steel.
- Continuous chipping capacity of up to 6".
- Power feed on/off control bar.
- 3 point linkage, cat. 1.
- Heavy duty shielded PTO shaft (1 3/8" ASAE cat. 4).
- Built in high volume blower with optional 15" extension.
- Easy access to belts and chipper knives.





TORNADO BRC

20-60 HP (15-45 KW)
540 rpm - cat. 1



Standard duty rotary cutters


- Cutting heights: from 1" to 9 1/4".
- 10 gauge reinforced deck.
- Heavy duty shielded PTO shaft with shear bolt or slip clutch safety (1 3/8" ASAE cat. 4).
- Oval stump jumper standard on 48", 60" & 72" sizes.
- Spring steel blades.
- 1" cutting capacity.
- Front & rear safety shields standard.
- Laminated tail wheel (4"x8"x15").
- 3 point linkage, cat. 1.
- Floating top link.
- Round back frame.

| MODEL | | BRC-142 | BRC-148 | BRC-160 | BRC-172 | BRC-242 | BRC-248 | BRC-260 | BRC-272 |
|-------|--------|------------------------|------------------------|------------------------|------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| | | SHEAR BOLT | | | | SLIP CLUTCH | | | |
| | HP | 20-60 | 25-60 | 30-60 | 35-60 | 20-60 | 25-60 | 30-60 | 35-60 |
| | in | 42" | 48" | 60" | 72" | 42" | 48" | 60" | 72" |
| | in | 47" | 56" | 68" | 79" | 47" | 56" | 68" | 79" |
| | lbs | 383 | 443 | 528 | 601 | 401 | 461 | 539 | 612 |
| | lbs | 397 | 457 | 591 | 675 | 415 | 475 | 613 | 686 |
| | rpm | 1,042 | 1,042 | 794 | 794 | 1,042 | 1,042 | 794 | 794 |
| | fpm | 11,437 | 12,560 | 11,948 | 14,232 | 11,437 | 12,560 | 11,948 | 14,232 |
| | N°-in | 2-3/8" x 2 3/4" | 2-3/8" x 2 3/4" | 2-1/2" x 3" | 2-1/2" x 3" | 2-3/8" x 2 3/4" | 2-3/8" x 2 3/4" | 2-1/2" x 3" | 2-1/2" x 3" |
| | in | 1"-9 1/4" | 1"-9 1/4" | 1"-9 1/4" | 1"-9 1/4" | 1"-9 1/4" | 1"-9 1/4" | 1"-9 1/4" | 1"-9 1/4" |
| | N°-in | 1-4"x8"x15" | 1-4"x8"x15" | 1-4"x8"x15" | 1-4"x8"x15" | 1-4"x8"x15" | 1-4"x8"x15" | 1-4"x8"x15" | 1-4"x8"x15" |
| | 1 3/8" | ASAE cat. 4 shear bolt | ASAE cat. 4 shear bolt | ASAE cat. 4 shear bolt | ASAE cat. 4 shear bolt | ASAE cat. 4 slip clutch | ASAE cat. 4 slip clutch | ASAE cat. 4 slip clutch | ASAE cat. 4 slip clutch |
| | | \$ 1,624 | \$ 1,983 | \$ 2,182 | \$ 2,534 | \$ 1,803 | \$ 2,162 | \$ 2,361 | \$ 2,713 |

WARNING: Because of possible injury from thrown objects, all rotary cutters are potentially dangerous. Any rotary cutter intended for use along roadways or other locations where people may be present must be used with safety shielding in place.

TORNADO RMD

35-80 HP (26-60 KW)
540 rpm - cat. 1

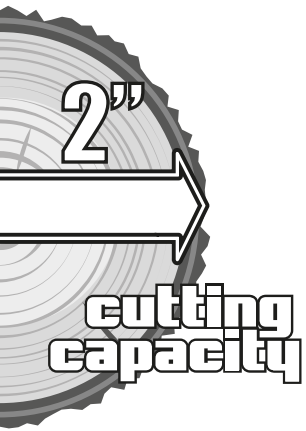

Medium duty rotary cutters

- Cutting heights: from 1" to 9 1/4".
- Replaceable skids.
- Highly engineered & rugged gearbox.
- Heavy duty shielded PTO shaft with slip clutch safety (1 3/8" ASAE cat. 4).
- 3 point linkage, cat. 1.
- Floating top link.
- Exceptionally heavy duty 1/2"x4" spring steel blades.
- 2" cutting capacity.
- Laminated tail wheel with tapered roller bearings (4"x8"x15").
- Oval heavy duty stump jumper standard.
- Heavy duty reinforced 8 gauge deck.
- Front & rear protective chain shields standard.

WARNING:

Because of possible injury from thrown objects, all rotary cutters are potentially dangerous. Any rotary cutter intended for use along roadways or other locations where people may be present must be used with safety shielding in place.

| MODEL | | RMD-360 | RMD-372 |
|-------|--------|-------------------------|-------------------------|
| | HP | 35-80 | 40-80 |
| | in | 60" | 72" |
| | in | 68" | 80" |
| | lbs | 695 | 785 |
| | lbs | 695 | 785 |
| | rpm | 855 | 855 |
| | fpm | 13,189 | 15,748 |
| | N°-in | 2-1/2"x4" | 2-1/2"x4" |
| | in | 1"-9 1/4" | 1"-9 1/4" |
| | N°-in | 1-4"x8"x15" | 1-4"x8"x15" |
| | 1 3/8" | ASAE cat. 4 slip clutch | ASAE cat. 4 slip clutch |
| | | \$ 3,960 | \$ 4,400 |

STANDARD



Laminated tail wheel



Carbon steel rotor with free swinging blades



Safety chains & shields




Replaceable side skids



TORNADO RHD

50-100 HP (37-74 KW)
540 rpm - cat. 1 & 2

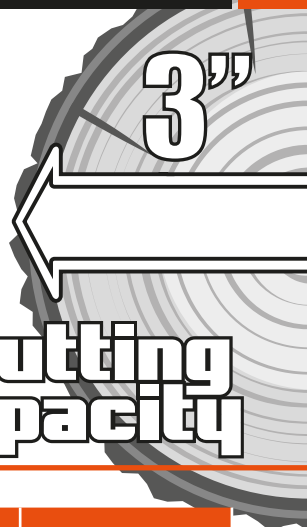

cutting capacity

Heavy duty rotary cutters




- Cutting heights: from 2" to 8".
- Replaceable skids.
- Highly engineered & rugged gearbox.
- Heavy duty shielded PTO shaft with slip clutch safety (1 3/8" ASAE cat. 6).
- 3 point linkage, cat. 1 & 2.
- Floating top link.
- Front & rear protective chain shields standard.
- Exceptionally heavy duty 1/2"x4" spring steel blades.
- 3" cutting capacity.
- Laminated tail wheel with tapered roller bearings (5"x8"x15").
- Oval heavy duty stump jumper standard.
- Heavy duty reinforced deck.

WARNING:

Because of possible injury from thrown objects, all rotary cutters are potentially dangerous. Any rotary cutter intended for use along roadways or other locations where people may be present must be used with safety shielding in place.



Heavy duty free swinging blades mounted on a high carbon steel rotor protected by an oval stump jumper

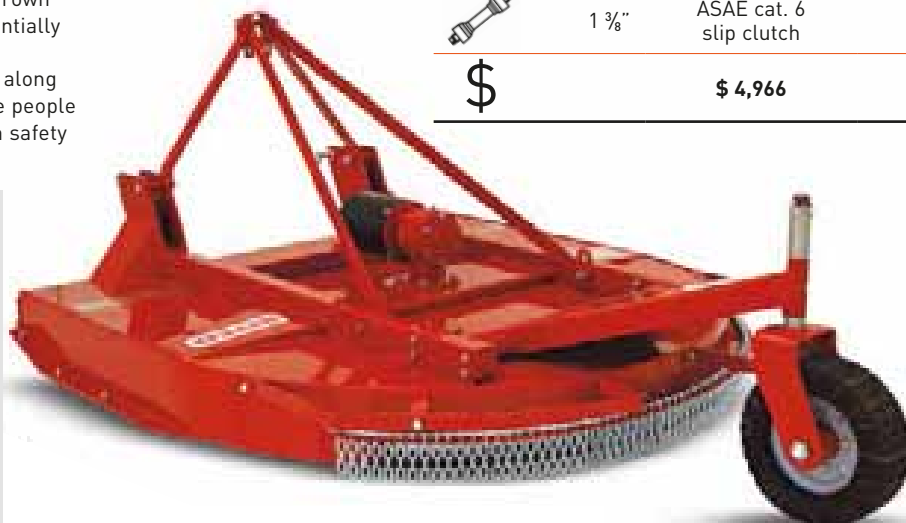













| MODEL | | RHD-472 | RHD-484 |
|-------|--------|-------------------------|-------------------------|
| | HP | 50-100 | 60-100 |
| | in | 72" | 84" |
| | in | 76" | 88" |
| | lbs | 1,025 | 1,200 |
| | lbs | 1,025 | 1,200 |
| | rpm | 748 | 748 |
| | fpm | 13,878 | 16,191 |
| | N°-in | 2-1/2"x4" | 2-1/2"x4" |
| | in | 2"- 8" | 2"- 8" |
| | N°-in | 1-5"x8"x15" | 1-5"x8"x15" |
| | 1 3/8" | ASAE cat. 6 slip clutch | ASAE cat. 6 slip clutch |
| | | \$ 4,966 | \$ 5,676 |

TILL-RITE T30

16-30 HP (12-22 KW)
540 or 2000 rpm - cat. 1



| MODEL | T30-134 | T30-142 | T30-150 | T30-234 | T30-242 | T30-250 | T30-534 | T30-542 | T30-550 |
|--|------------------------|------------------------|------------------------|-------------------------|-------------------------|-------------------------|------------------------|------------------------|------------------------|
| | SHEAR BOLT 540 rpm | | | SLIP CLUTCH 540 rpm | | | SHEAR BOLT 2000 rpm | | |
|  HP | 16-30 | 20-30 | 25-30 | 16-30 | 20-30 | 25-30 | 16-30 | 20-30 | 25-30 |
|  in | 34" | 42" | 50" | 34" | 42" | 50" | 34" | 42" | 50" |
|  in | 39" | 47" | 55" | 39" | 47" | 55" | 39" | 47" | 55" |
|  in | 24" | 32" | 40" | 24" | 32" | 40" | 24" | 32" | 40" |
|  lbs | 297 | 341 | 374 | 308 | 352 | 385 | 297 | 341 | 374 |
|  lbs | 387 | 430 | 463 | 398 | 441 | 474 | 387 | 430 | 463 |
|  N° | 4 | 5 | 6 | 4 | 5 | 6 | 4 | 5 | 6 |
|  N° | 16 | 20 | 24 | 16 | 20 | 24 | 16 | 20 | 24 |
|  z | 14-16 | 14-16 | 14-16 | 14-16 | 14-16 | 14-16 | 9-22 | 9-22 | 9-22 |
|  rpm | 205 | 205 | 205 | 205 | 205 | 205 | 237 | 237 | 237 |
|  in | 7 1/4" | 7 1/4" | 7 1/4" | 7 1/4" | 7 1/4" | 7 1/4" | 7 1/4" | 7 1/4" | 7 1/4" |
|  1 3/8" | ASAE cat. 2 shear bolt | ASAE cat. 2 shear bolt | ASAE cat. 2 shear bolt | ASAE cat. 3 slip clutch | ASAE cat. 3 slip clutch | ASAE cat. 3 slip clutch | ASAE cat. 2 shear bolt | ASAE cat. 2 shear bolt | ASAE cat. 2 shear bolt |
| \$ | \$ 2,330 | \$ 2,406 | \$ 2,543 | \$ 2,424 | \$ 2,500 | \$ 2,637 | \$ 3,085 | \$ 3,161 | \$ 3,298 |


Rotary tiller with manual side-shift Forward or reverse tilling rotation

- Highly engineered & rugged gearbox.
- Smooth manual side-shift system.
- Adjustable side skids for working depth control.
- Heavy duty shielded PTO shaft with shear bolt coupling (1 3/8" ASAE cat. 2) or slip clutch safety (1 3/8" ASAE cat. 3).
- Max. working depth 7 1/4".
- Parking stand.
- Reinforced lateral ASA 60 chain drive transmission in oil bath.
- Four blades per flange.
- High carbon solid steel round rotor shaft allows for a deeper working depth.
- Outward turned blades keep the rotor supports clean and maximize working width.
- Heavy duty full size blades.
- 3 point linkage, cat. 1.

STANDARD




Manual side-shift




Forward or reverse tilling rotation



Gearbox manufactured by Befco

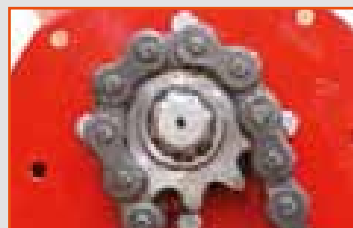

Lateral ASA 60 chain drive transmission in oil bath



Side skids for working depth control



TILL-RITE T40

20-40 HP (15-30 KW)
540 rpm - cat. 1













Rotary tiller with manual side-shift Forward or reverse tilling rotation

- Highly engineered & rugged gearbox.
- Smooth manual side-shift system.
- Adjustable side skids for working depth control.
- Heavy duty shielded PTO shaft with shear bolt coupling or slip clutch safety (1 3/8" ASAE cat. 3).
- Exchangeable sprockets for two working speeds.
- Flanged rotor shaft for easy removal & service.
- Parking stand.
- 3 point linkage, cat. 1.
- Lateral ASA 80 chain drive transmission in oil bath.
- Four blades per flange.



- High carbon solid steel round rotor shaft allows for a deeper working depth.
- Outward turned blades keep the rotor supports clean and maximize working width.
- Heavy duty full size blades.
- Wear protection on chain case.
- Max. working depth 7 1/4".




| MODEL | T40-142 | T40-150 | T40-158 | T40-166 | T40-242 | T40-250 | T40-258 | T40-266 |
|--|------------------------|------------------------|------------------------|------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| | SHEAR BOLT | | | | SLIP CLUTCH | | | |
|  HP | 20-40 | 25-40 | 30-40 | 32-40 | 20-40 | 25-40 | 30-40 | 32-40 |
|  in | 42" | 50" | 58" | 66" | 42" | 50" | 58" | 66" |
|  in | 47" | 55" | 63" | 72" | 47" | 55" | 63" | 72" |
|  in | 32" | 40" | 48" | 56" | 32" | 40" | 48" | 56" |
|  lbs | 363 | 407 | 451 | 518 | 373 | 417 | 461 | 530 |
|  lbs | 481 | 519 | 540 | 607 | 491 | 529 | 550 | 619 |
|  N° | 5 | 6 | 7 | 8 | 5 | 6 | 7 | 8 |
|  N° | 20 | 24 | 28 | 32 | 20 | 24 | 28 | 32 |
|  z | 11-14 | 11-14 | 11-14 | 11-14 | 11-14 | 11-14 | 11-14 | 11-14 |
|  rpm | 231/375 | 231/375 | 231/375 | 231/375 | 231/375 | 231/375 | 231/375 | 231/375 |
|  in | 7 1/4" | 7 1/4" | 7 1/4" | 7 1/4" | 7 1/4" | 7 1/4" | 7 1/4" | 7 1/4" |
|  1 3/8" | ASAE cat. 3 shear bolt | ASAE cat. 3 shear bolt | ASAE cat. 3 shear bolt | ASAE cat. 3 shear bolt | ASAE cat. 3 slip clutch | ASAE cat. 3 slip clutch | ASAE cat. 3 slip clutch | ASAE cat. 3 slip clutch |
| \$ | \$ 2,889 | \$ 3,011 | \$ 3,116 | \$ 3,426 | \$ 2,983 | \$ 3,105 | \$ 3,210 | \$ 3,520 |

STANDARD



Manual side-shift

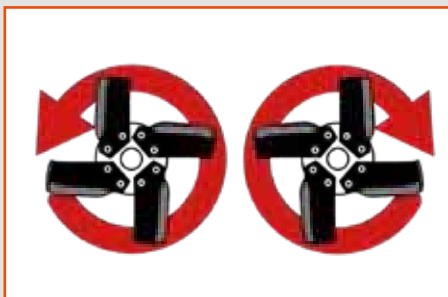

Forward or reverse tilling rotation




Gearbox manufactured by Befco



Lateral ASA 80 chain drive transmission in oil bath



Stamped steel rotor shaft supports and transmission

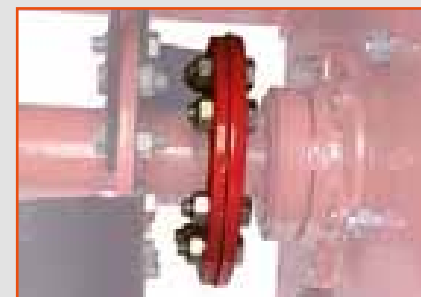

Rotor shaft with flanges for easy blade replacement




TILL-RITE T50










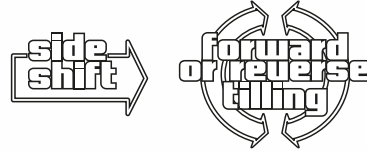


25-50 HP (19-37 KW)
540 rpm - cat. 1



Rotary tiller with manual side-shift Forward or reverse tilling rotation

- Highly engineered & rugged gearbox.
- Smooth manual side-shift system.
- Adjustable side skids for working depth control.
- Heavy duty shielded PTO shaft with slip clutch safety (1 3/8" ASAE cat. 4).
- Exchangeable sprockets for two working speeds.
- Flanged rotor shaft for easy removal & service.
- Parking stand.
- 3 point linkage, cat. 1.
- Lateral ASA 100 chain drive transmission in oil bath.
- Standard six blades per flange for greater stability and finer soil pulverization.
- Outward turned blades keep the rotor supports clean and maximize working width.
- Heavy duty full size tiller blades.
- Wear protection on chain case.
- Max. working depth 8 3/8".




| MODEL | | T50-350 | T50-358 | T50-366 |
|--|--------|-------------------------|-------------------------|-------------------------|
|  | HP | 25-50 | 30-50 | 35-50 |
|  | in | 50" | 58" | 66" |
|  | in | 55" | 63" | 72" |
|  | in | 40" | 48" | 56" |
|  | lbs | 481 | 528 | 575 |
|  | lbs | 625 | 670 | 708 |
|  | N° | 6 | 7 | 8 |
|  | N° | 36 | 42 | 48 |
|  | z | 10-13 | 10-13 | 10-13 |
|  | rpm | 226/383 | 226/383 | 226/383 |
|  | in | 8 3/8" | 8 3/8" | 8 3/8" |
|  | 1 3/8" | ASAE cat. 4 slip clutch | ASAE cat. 4 slip clutch | ASAE cat. 4 slip clutch |
| \$ | | \$ 3,727 | \$ 3,853 | \$ 4,050 |



STANDARD



Manual side-shift

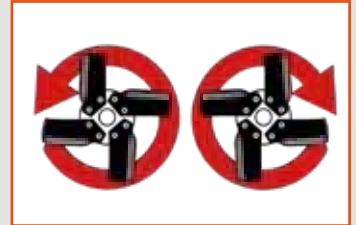

Forward or reverse tilling rotation



Gearbox manufactured by Befco




Lateral ASA 100 chain drive transmission in oil bath



Stamped steel rotor shaft supports and transmission



Rotor with 6 blades per flange

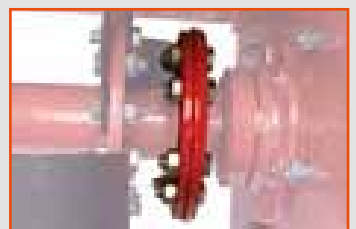

Rotor shaft with flanges for easy blade replacement

TILL-RITE T60

35-60 HP (26-45 KW)
540 rpm - cat. 1



Rotary tiller with manual side-shift Forward or reverse tilling rotation

- Highly engineered & rugged gearbox.
- Smooth manual side-shift system.
- Adjustable side skids for working depth control.
- Heavy duty shielded PTO shaft with slip clutch safety [1 3/8" ASAE cat. 6].
- Flanged rotor shaft for easy removal & service.
- Parking stand.
- 3 point linkage, cat. 1.
- Lateral ASA 100 chain drive transmission in oil bath.
- Standard six blades per flange for greater stability and finer soil pulverization.
- Outward turned blades keep the rotor supports clean and maximize working width.
- Heavy duty full size tiller blades.
- Wear protection on chain case.
- Max. working depth 8 3/4".


| MODEL | | T60-366 | T60-374 |
|--|------|-------------------------|-------------------------|
|  | HP | 35-60 | 40-60 |
|  | in | 66" | 74" |
|  | in | 72" | 81" |
|  | in | 56" | 63" |
|  | lbs | 740 | 798 |
|  | lbs | 864 | 910 |
|  | N° | 8 | 9 |
|  | N° | 48 | 54 |
|  | z | 12-14 | 12-14 |
|  | rpm | 221 | 221 |
|  | in | 8 ¾" | 8 ¾" |
|  | 1 ½" | ASAE cat. 6 slip clutch | ASAE cat. 6 slip clutch |
|  | | \$ 5,062 | \$ 5,267 |



STANDARD




Manual side-shift




Forward or reverse tilling rotation




Gearbox manufactured by Befco




Lateral ASA 100 chain drive transmission in oil bath



Stamped steel rotor shaft supports and transmission



Rotor with 6 blades per flange



Rotor shaft with flanges for easy blade replacement

TILL-RITE T70

40-70 HP (30-52 KW)
540 rpm - cat. 1



Rotary tiller

Forward or reverse tilling rotation

- Highly engineered & rugged gearbox.
- Adjustable side skids for working depth control.
- Heavy duty shielded PTO shaft with slip clutch safety (1 3/8" ASAE cat. 6).
- Flanged rotor shaft for easy removal & service.
- Parking stand.
- 3 point linkage, cat. 1.
- Lateral ASA 100 chain drive transmission in oil bath.
- Standard six blades per flange for greater stability and finer soil pulverization.
- Outward turned blades keep the rotor supports clean and maximize working width.
- Heavy duty full size tiller blades.
- Wear protection on chain case.
- Max. working depth 8 3/4".



T70-382



| HP | in | in | lbs | lbs | N° | N° | z | rpm | in | 1 3/8" |
|-------|-----|-----|-----|-------|----|----|-------|-----|--------|-------------------------------|
| 40-70 | 82" | 88" | 879 | 1,009 | 10 | 60 | 12-14 | 221 | 8 3/4" | ASAE cat. 6 slip clutch |

\$ 5,514



STANDARD



Forward or reverse tilling rotation




Gearbox manufactured by Befco



Lateral ASA 100 chain drive transmission in oil bath



Stamped steel rotor shaft supports and transmission

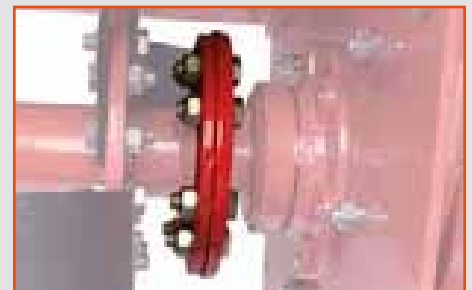

Rotor shaft with flanges for easy blade replacement

GREEN-RITE GRT















25-70 HP (19-52 KW)
540 rpm - cat. 1



Overseeder-aerator & seeder-cultivator

- Special 2- $\frac{13}{16}$ " spacing on rotor for aerating with 3 knives per flange; 4 knives on model 282.
- 2" to 3" suggested working depth with aerator rotor, 7 $\frac{1}{4}$ " working depth with tiller rotor; 8 $\frac{3}{4}$ " on on model 282.
- Seed covering/dethatching adjustable tickler tines.
- High precision metering seed cups made from a nylon/fiberglass composite.
- Parking stand.
- Ground drive system for seed hopper.
- Large capacity seed hopper with agitator.
- Heavy duty shielded PTO shaft with slip clutch safety (1 $\frac{3}{8}$ " ASAE cat. 3 for models 250, 258 & 266, cat. 6 for model 282).
- Corrugated depth control roller made with low weight nylon/fiberglass roller rings.
- Double sided, extra thin profile razor blades reduce impact when aerating over existing turf (available on request).



| MODEL | | GRT-250 | GRT-258 | GRT-266 | GRT-282 |
|---|--------|-------------------------|-------------------------|-------------------------|-------------------------|
|  | HP | 25-45 | 30-45 | 32-45 | 40-70 |
|  | in | 50" | 58" | 66" | 82" |
|  | in | 57" | 66" | 74" | 89" |
|  | lbs | 910 | 998 | 1,170 | 1,500 |
|  | lbs | 1,160 | 1,245 | 1,390 | 1,760 |
|  | cu.ft | 4.60 | 5.30 | 6.00 | 7.60 |
|  | N° | 7 | 8 | 9 | 11 |
|  | N° | 15 | 18 | 21 | 26 |
|  | N° | 43 | 52 | 61 | 104 |
|  | z | 11-14 | 11-14 | 11-14 | 12-14 |
|  | rpm | 231 | 231 | 231 | 221 |
|  | in | 7 1/4" | 7 1/4" | 7 1/4" | 8 3/4" |
|  | 1 3/8" | ASAE cat. 3 slip clutch | ASAE cat. 3 slip clutch | ASAE cat. 3 slip clutch | ASAE cat. 6 slip clutch |
|  | | \$ 9,488 | \$ 9,754 | \$ 10,940 | \$ 14,097 |

STANDARD



Aerator rotor with straight blades with 2-¹³/₁₆" flange spacing




Corrugated roller with nylon/fiberglass rings to compact the ground for optimal seed germination




Precise seed metering cups



Seed calibration handle

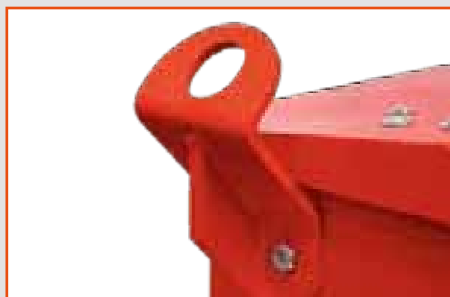

Lift hooks easy loading and unloading

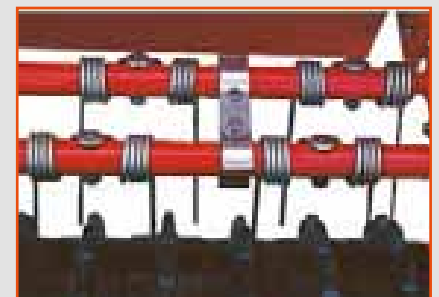

Tickler tines for partial or complete seed incorporation into the ground

SEED-RITE SRT

25-70 HP (19-52 KW)
cat. 1













Primary seeder

- 3 point linkage, cat. 1.
- 74" seeding width.
- Heavy duty frame.
- Heavy duty lid with seed splash guard.
- Hopper capacity 7.00 cu. ft.
- Seed box with steel shaft agitator.
- 10 high precision metering seed cups.
- Two lift hooks.
- Wide range of calibration settings per acre.
- Wind guarded seed drop.
- ASA 50 chains with chain tensioners.
- Front 11 1/2" diameter corrugated roller with 28 rings to drive the seed hopper.
- Rear corrugated roller with 29 rings, 9 1/2" in diameter made with low weight nylon/ fiberglass.
- Roller spindles: 1 3/8" front and rear, with greasable bearings.
- Two spring-tine track removers.



SRT-074

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |  |  |
| HP | in | in | lbs | lbs | | cu.ft | N° | N°-Ø | N°-Ø |
| 25-70 | 74" | 80" | 1,008 | 1,190 | ASA 50 | 7 | 10 | 28-11 ½" | 29-9 ½" |

\$ 6,331




STANDARD




Dual front and rear corrugated roller equipped with nylon/fiberglass rings



Lift hooks easy loading and unloading

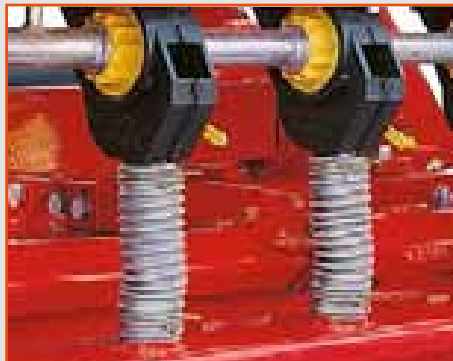

Precise seed metering cups

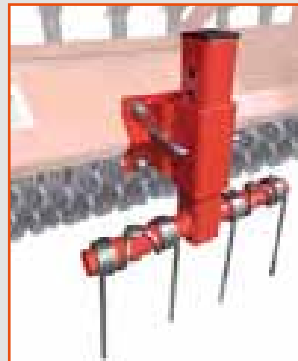

Spring-tine tractor tire track removers



Seed distribution engaged by ASA 50 chain transmission



MOLE 100 / 200 / 300 / 400

15-90 HP (11-67 KW)
540 rpm - cat. 1 & 2



Post hole diggers & augers

- Heavy duty boom and yoke for extra strength and long lasting service.
- Choice of 6", 9", 12", 18", 24" & 30" augers.
- Rugged dependable gearbox at 540 rpm provides constant digging power.
- Individually replaceable knives and point.
- Fully welded flighting on all augers.
- Reinforced mounting collar on all augers.
- Safety shielding around auger & PTO.
- 2" output shaft on 200, 300 & 400 series.
- 1 3/8" output shaft with 5/8" adapter bushing on 100 series.

- Heavy duty shielded PTO shaft (1 3/8" ASAE cat. 3) on 200, 300 & 400 series.
- Heavy duty shielded PTO shaft (1 3/8" ASAE cat. 2) on 100 series.
- Fish-tail point standard.

STANDARD



Reinforced frame and three point hitch on model 300-512 & 400-512



Driveline with shear pin safety



Hook-up stand

| MODEL | DIGGERS | | | |
|-----------|------------------------|------------------------|------------------------|------------------------|
| | 100-512 | 200-512 | 300-512 | 400-512 |
| HP | 15-25 | 18-40 | 18-50 | 18-90 |
| Ø in | 2 7/8" | 3 1/2" | 3 1/2" reinforced | 3 1/2" reinforced |
| Ø in | 2 3/8" | 2 7/8" | 2 7/8" reinforced | 2 7/8" reinforced |
| rpm | 180 | 180 | 154 | 135 |
| | 3:1 | 3:1 | 3.5:1 | 4:1 |
| lbs | 112 | 200 | 230 | 260 |
| lbs | 165 | 235 | 275 | 305 |
| | limited Cat.1 | Cat.1 | Cat.1&2 | Cat.1&2 |
| 1 3/8" | ASAE cat. 2 shear bolt | ASAE cat. 3 shear bolt | ASAE cat. 3 shear bolt | ASAE cat. 3 shear bolt |
| \$ | \$ 1,118 | \$ 1,202 | \$ 1,459 | \$ 1,772 |

| MODEL | AUGERS | | | | | | | | | |
|-----------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|------------------------|--|
| | * 106-531 | * 109-531 | * 112-531 | 206-531 | 209-531 | 212-531 | ** 218-531 | ** 224-531 | ** 230-531 | |
| in | 6" | 9" | 12" | 6" | 9" | 12" | 18" | 24" | 30" | |
| L in | 36" | 36" | 36" | 48" | 48" | 48" | 48" | 48" | 44" | |
| lbs | 23 | 40 | 44 | 30 | 52 | 58 | 67 | 100 | 214 | |
| S in | Single 3/16" | Double 3/16" | Double 3/16" | Single 3/16" | Double 3/16" | Double 3/16" | Double 1/4" | Double 1/4" | Double 15" & 30" 5/16" | |
| \$ | \$ 328 | \$ 343 | \$ 436 | \$ 336 | \$ 385 | \$ 457 | \$ 620 | \$ 834 | \$ 1,616 | |

All post hole diggers are crated 2 each. Add \$50 net for single order units.

* Recommended for model 100-512.


** Available only for models 300-512 & 400-512.



Choice of 6, 9, 12, 18, 24 and 30" auger and 36" or 48" auger lengths



Replaceable knives and points




Heavy duty double flighting on all augers

BABY-HOP POLY BABY-HOP







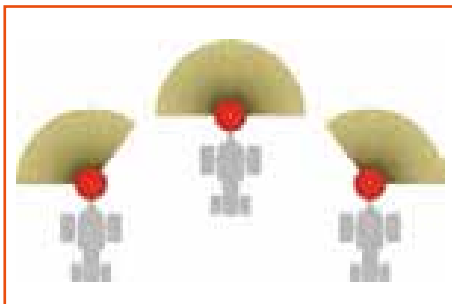


Fertilizer spreaders Ground driven pull type hitch

- One piece seamless hopper.
- Even left-center-right spread pattern.
- High flotation air tires.
- Easy connecting pull type hitch.
- Sturdy tubular frame.
- Hopper leveling adjustment.
- Sealed heavy duty gearbox with metal gears.
- Ground controlled distribution.
- Polyethylene hopper with stainless steel bottom standard on models 103-230 & 106-230.



Adjustable spread pattern



| MODEL | BABY-HOP | |
|---|---------------|-----------------|
| | 103-130 | 106-130 |
|  lbs | 62 | 84 |
|  lbs | 100 | 125 |
|  cu.ft/lbs | 3.71 / 237 | 5.30 / 339 |
|  ft | 3'-20" | 3'-20" |
|  in | 32" | 35" |
|  in | 39.6" | 44.4" |
|  N°-in | 2-13"x 6" | 2-16"x 8" |
| \$ | \$ 779 | \$ 1,032 |

| POLY BABY-HOP | |
|---------------|-----------------|
| 103-230 | 106-230 |
| 62 | 84 |
| 100 | 125 |
| 3.71 / 237 | 5.30 / 339 |
| 3'-20" | 3'-20" |
| 32" | 35" |
| 39.6" | 44.4" |
| 2-13"x 6" | 2-16"x 8" |
| \$ 866 | \$ 1,120 |

NOTE: Poundage capacity calculated @ 13-13-13 fertilizer weight of 64 lbs. per cu. ft.



STANDARD




Gate opening control



Sealed gearbox manufactured by Befco with metal gears

STANDARD

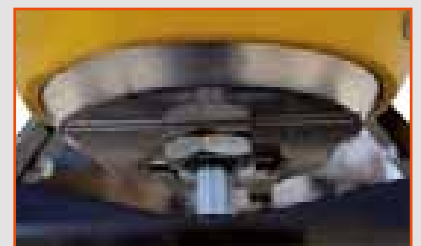

Bottom plate in stainless steel










HOP / POLY-HOP

16-50 HP (12-37 KW)
540 rpm - cat. 1



Fertilizer spreaders



- One piece seamless hopper.
- Selective double gate opening on 206, 209 & 212.
- Adjustable ejector spoon to center spread on 203 model.
- Sealed heavy duty gearbox.
- Fixed agitator.
- Adjustable spreading fins on 209 & 212 models.
- Heavy duty shielded PTO shaft (1 3/8" ASAE cat. 1).
- Sturdy tubular frame.
- 3 point linkage, limited cat. 1 on 203 & 206 models, cat. 1 on 209 & 212 models.
- Quick hitch compatible standard on models 209, 212 and optional on models 203.
- Safety shields standard.

| MODEL | | HOP | | | |
|---|-----------|-------------|-------------|-------------|-------------|
| | | 203-120 | 206-121 | 209-121 | 212-121 |
|  | HP | 16-30 | 16-30 | 20-50 | 20-50 |
|  | lbs | 81 | 102 | 125 | 136 |
|  | lbs | 116 | 145 | 160 | 171 |
|  | cu.ft/lbs | 3.71 / 237 | 5.30 / 339 | 8.58 / 549 | 11.95 / 765 |
|  | ft | 23' | 23' | 46' | 46' |
|  | in | 32" | 35" | 42" | 48" |
|  | in | 31" | 34" | 40" | 46" |
|  | 1 3/8" | ASAE cat. 1 | ASAE cat. 1 | ASAE cat. 1 | ASAE cat. 1 |
|  | | \$ 764 | \$ 793 | \$ 835 | \$ 879 |

NOTE: Poundage capacity calculated @ 13-13-13 fertilizer weight of 64 lbs. per cu. ft.
All Hop fertilizers are priced at 2 per pallet. Add \$25 net for single unit orders.

Fertilizer spreaders with polyethylene hoppers

- Polyethylene hopper with stainless steel bottom standard.
- Sturdy tubular frame.
- Selective double opening gate on 206, 209 & 212 models.
- Heavy duty shielded PTO shaft (1 3/8" ASAE cat. 1).
- Sealed heavy duty gearbox.
- Fixed agitator.
- 3 point linkage, limited cat. 1 on 203 & 206 models, cat. 1 on 209 & 212 models.
- Quick hitch compatible standard on models 209, 212 and optional on models 203.
- Safety shields standard.

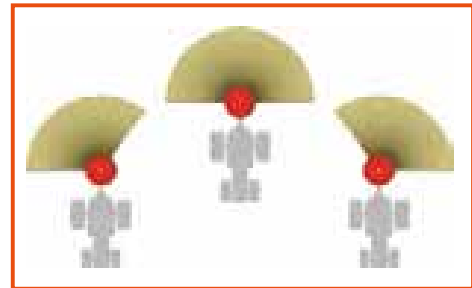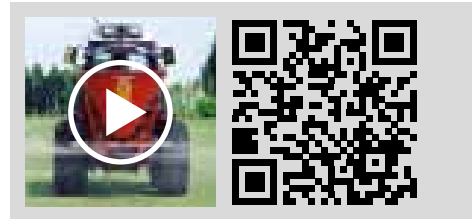

Adjustable spread pattern




| POLY-HOP | | | |
|---------------|-----------------|-----------------|-----------------|
| 203-220 | 206-221 | 209-421 | 212-421 |
| 16-30 | 16-30 | 20-50 | 20-50 |
| 81 | 102 | 125 | 136 |
| 116 | 145 | 160 | 171 |
| 3.71 / 237 | 5.30 / 339 | 8.58 / 549 | 11.95 / 765 |
| 23' | 23' | 46' | 46' |
| 32" | 35" | 42" | 48" |
| 31" | 34" | 40" | 46" |
| ASAE cat. 1 | ASAE cat. 1 | ASAE cat. 1 | ASAE cat. 1 |
| \$ 848 | \$ 1,042 | \$ 1,336 | \$ 1,393 |

STANDARD

Stainless steel adjustable spreader wings on 209 & 212 models



Stainless steel hopper bottom plate

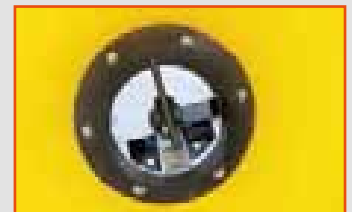

Stainless steel gates opening control on 206, 209 & 212 models



NOTE: Poundage capacity calculated @ 13-13-13 fertilizers weight of 64 lbs per cu. ft.
All Hop fertilizers are priced at 2 per pallet. Add \$25 net for single units orders.

TURBO-HOP 301 / 303








20-60 HP (15-45 KW)
540 rpm - cat. 1 & 2





Pendular spreaders

- Sturdy tubular frame.
- Heavy duty cast iron gearbox in oil bath.
- Accurate flow control adjustment.
- Ideal for the distribution of fertilizer, seed, salt and sand where accuracy and precision in application are needed.
- Full spread or left / right discharge pattern.
- Polyethylene hopper.
- Spreader spouts made of nylon and reinforced fiberglass.
- Stainless steel opening control disc.
- Cast iron anti-wear agitator.
- 3 point linkage, cat. 1 on model 301 and cat. 1&2 on model 303.
- Heavy duty shielded PTO shaft (1 3/8" ASAE cat. 1) with shock absorber and shear bolt safety.
- Safety shields standard.



| MODEL | | 301-300 | 301-400 | 303-600 | 303-800 | 303-999 |
|---|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|  HP | | 20-60 | 20-60 | 20-60 | 20-60 | 20-60 |
|  lbs | | 256 | 267 | 419 | 448 | 455 |
|  mph | | 2 to 10 | 2 to 10 | 2 to 10 | 2 to 10 | 2 to 10 |
|  cu.ft/lbs | | 9.00 / 576 | 12.80 / 820 | 20.6 / 1,318 | 30.3 / 1,939 | 36.1 / 2,310 |
|  ft | | 17'-65' | 17'-65' | 17'-65' | 17'-65' | 17'-65' |
|  in | | 44" | 48" | 38" | 43" | 47" |
|  1 3/8" | ASAE cat. 1 shear bolt | ASAE cat. 1 shear bolt | ASAE cat. 1 shear bolt | ASAE cat. 1 shear bolt | ASAE cat. 1 shear bolt | ASAE cat. 1 shear bolt |
| \$ | | \$ 3,000 | \$ 3,270 | \$ 4,012 | \$ 4,408 | \$ 4,812 |

NOTE: Poundage capacity calculated @ 13-13-13 fertilizers weight of 64 lbs per cu. ft.



Adjustable spread pattern


STANDARD



Corrosion resistant polyethylene hopper



Heavy duty gearbox in oil bath manufactured by Befco



Distributing unit in stainless steel and agitator in stamped steel



Graded scale for accurate flow control adjustment

CORE AERATOR SD

20-50 HP (15-37 KW)
cat. 1




Standard duty core aerators

- Hub spacing 6 1/2".
- Special high tensile steel shafts on the rotors.
- 2 bronze bushings per rotor.
- 8 gauge formed steel support panels.
- All panels support rotors from all sides.
- 1 1/4" rotor support shaft.
- 3/8" formed Cat. 1 "A" frame.
- Machine equipped with spikes instead of spoons is available on request.
- 3 point linkage, Cat. 1.
- 6 spoons per hub.
- All flanges are welded to rotors.
- Flange thickness 3/16".
- 3 support stands.
- 3/4" hardened steel spoons.
- Front or rear tractor mounting.

| MODEL | BCA-048 | BCA-060 | BCA-072 |
|-----------|-----------------|-----------------|-----------------|
| HP | 20-50 | 20-50 | 20-50 |
| in | 48" | 60" | 72" |
| in | 54" | 65" | 78" |
| lbs | 284 | 357 | 401 |
| N° | 4 | 5 | 6 |
| N° | 8 | 10 | 12 |
| N° | 48 | 60 | 72 |
| in | 4 1/2" | 4 1/2" | 4 1/2" |
| in | 12" x 15" | 19" x 15" | 25" x 15" |
| lbs | 78 ea. | 125 ea. | 160 ea. |
| \$ | \$ 2,325 | \$ 2,438 | \$ 2,634 |

STANDARD



Front or rear tractor mounting



Both hub flanges are welded and equipped with two bronze bushings per rotor

CORE AERATOR HD

20-70 HP (15-52 KW)
cat. 1 & 2



Heavy duty core aerators

- Hub spacing 6 1/2".
- Special high tensile steel shafts on the rotors.
- 2 bronze bushings per rotor.
- 3/16" formed steel support panels.
- All panels support rotors from all sides.

- 1 1/4" rotor support shaft.
- 3/8" formed Cat. 1 & 2 "A" frame.
- Machine equipped with spikes instead of spoons is available on request.
- 3 point linkage, Cat. 1 & 2.
- 8 spoons per hub.
- All flanges are welded to rotors.
- Flange thickness 3/16".
- 3/4" hardened steel spoons.
- Front or rear tractor mounting.
- 3 support stands.

STANDARD



Eight spoons per flange



Choice of hollow spoons or solid spikes

| MODEL | | BCA-260 | BCA-272 |
|-------|-----|-----------------|-----------------|
| | HP | 20-70 | 20-70 |
| | in | 60" | 72" |
| | in | 65" | 78" |
| | lbs | 444 | 549 |
| | N° | 5 | 6 |
| | N° | 10 | 12 |
| | N° | 80 | 96 |
| | in | 4 1/2" | 4 1/2" |
| | in | 19" x 21" | 25" x 21" |
| | lbs | 170 ea. | 220 ea. |
| | | \$ 3,094 | \$ 3,424 |

SOIL PULVERIZERS SD


25-50 HP (19-37 KW)
cat. 1



Standard duty soil pulverizers

- 3/8" steel spikes fully welded in a timed scroll pattern on a heavy walled roller with two 160 lbs compression springs.
- Optional 2nd spiked roller available with two 80 lbs compression springs.
- 10" (49.1 lb/ft) frame beam.
- Reversible heat treated 1/2" x 2" shanks.
- 3 point linkage, cat. 1.
- 5 9/16" diameter spiked roller tube.
- Self aligning 1" bearings on roller.
- Formed plate "A" frame.

| MODEL | BPL-048 | BPL-060 | BPL-072 |
|-------|--------------------|--------------------|--------------------|
| HP | 25-50 | 25-50 | 25-50 |
| in | 48" | 60" | 72" |
| lbs | 496 | 652 | 679 |
| lbs | 544 | 702 | 729 |
| N° | 17 | 21 | 25 |
| N° | 70 | 88 | 106 |
| in | 2 13/16" | 2 13/16" | 2 13/16" |
| in | 4 1/2" | 4 1/2" | 4 1/2" |
| lbs | 160 lbs per spring | 160 lbs per spring | 160 lbs per spring |
| \$ | \$ 1,989 | \$ 2,127 | \$ 2,344 |

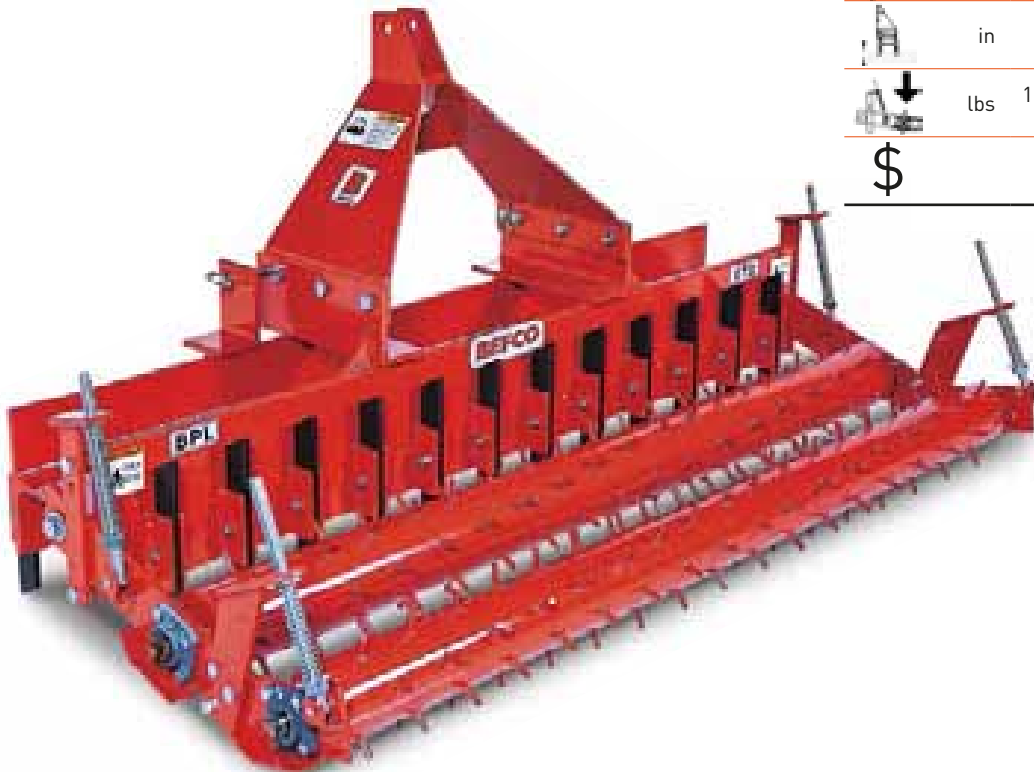

SOIL PULVERIZERS HD


40-90 HP (30-67 KW)
cat. 1



Heavy duty soil pulverizers

- 3/8" steel spikes fully welded in a timed scroll pattern on a heavy walled roller with two 160 lbs compression springs.
- Optional 2nd spiked roller available with two 80 lbs compression springs.
- 12" (59.4 lb/ft) frame beam.
- Reversible heat treated 1/2" x 2" shanks.
- 3 point linkage, cat. 1.
- 6 5/8" diameter spiked roller tube.
- Self aligning 1" bearings on roller.
- Formed plate "A" frame.

| MODEL | BPL-272 | BPL-284 |
|-------|--------------------|--------------------|
| HP | 40-90 | 40-90 |
| in | 72" | 84" |
| lbs | 781 | 875 |
| lbs | 846 | 940 |
| N° | 25 | 29 |
| N° | 106 | 124 |
| in | 2 13/16" | 2 13/16" |
| in | 4 1/2" | 4 1/2" |
| lbs | 160 lbs per spring | 160 lbs per spring |
| \$ | \$ 2,808 | \$ 3,175 |

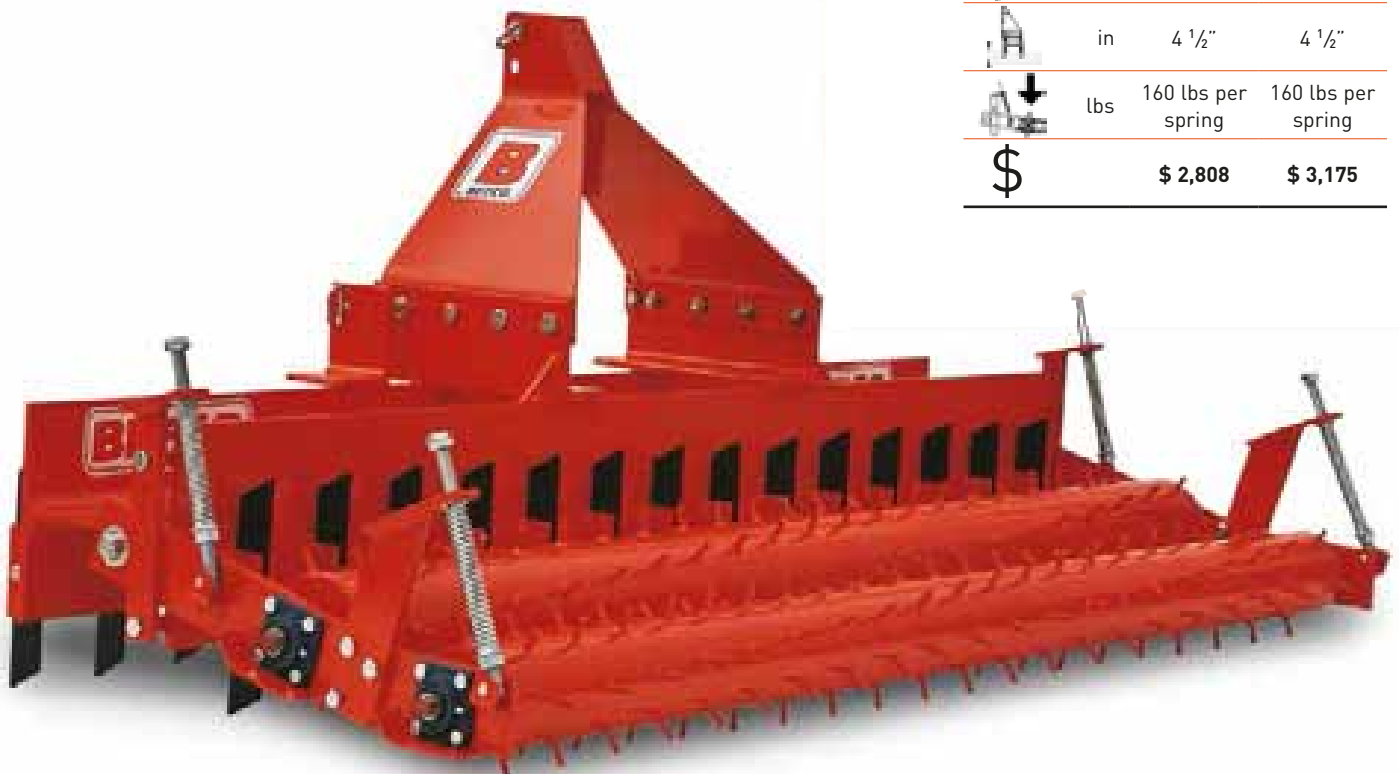

BOX SCRAPER

16-65 HP (12-48 KW)
cat. 1



- Roll formed moldboard.
- 3 point linkage, cat. 1.
- 2 bolt-on 1/2" x 6" heat treated blades with reversible cutting edge.
- Hardened steel ripping shanks with replaceable tips.
- Reinforced box design.

| MODEL | | BBS-C48 | BBS-060 | BBS-072 | BBS-084 |
|-------|-----|-------------------|----------|----------------------|----------|
| | | SUBCOMPACT SERIES | | STANDARD DUTY SERIES | |
| | HP | 16-30 | 25-65 | 25-65 | 25-65 |
| | in | 48" | 60" | 72" | 84" |
| | lbs | 251 | 470 | 530 | 630 |
| | lbs | 276 | 505 | 570 | 680 |
| | N° | 4 | 5 | 6 | 7 |
| | | \$ 846 | \$ 1,278 | \$ 1,419 | \$ 1,677 |


Standard duty series



Subcompact series

GRADING SCRAPER

16-65 HP (12-48 KW)
cat. 1



| MODEL | | BGS-C48 | BGS-060 | BGS-072 | BGS-084 |
|-------|-----|-------------------|----------------------|--------------|--------------|
| | | SUBCOMPACT SERIES | STANDARD DUTY SERIES | | |
| | HP | 16-30 | 25-65 | 25-65 | 25-65 |
| | in | 48" | 60" | 72" | 84" |
| | in | 52" | 64" | 76" | 89" |
| | lbs | 350 | 592 | 703 | 764 |
| | lbs | 386 | 628 | 739 | 800 |
| | N° | - | 5 | 6 | 7 |
| | in | 10 3/4" | 12 1/2" | 12 1/2" | 12 1/2" |
| | in | 0"-1 1/2" | 0"-1 1/2" | 0"-1 1/2" | 0"-1 1/2" |
| | | 1,139 | 1,459 | 1,613 | 1,872 |

- 3 point linkage, cat. 1.
- Adjustable height grading blades.
- Adjustable hardened steel ripping shanks with replaceable tips, on standard duty series.
- Heavy duty frame.
- 2 reversible and replaceable bolt-on 1/2" x 6" heat treated high carbon steel blades.
- Replaceable full length skid shoes.

STANDARD



Adjustable height grading blades



Skid shoes

REAR BLADE SD

16-50 HP (12-37 KW)
cat. 1




Standard duty rear blades

- 5 forward & 5 reverse positions on standard duty series.
- 3 forward and 3 reverse positions on subcompact series.
- Sturdy frame construction.
- Left or right offset.
- 3 tilt positions on standard duty series.
- 1/2" x 6" heat treated reversible cutting blade.
- 1/4" moldboard thickness.
- 3 point linkage, cat. 1.

| MODEL | | BRB-C48 | BRB-C60 | BRB-072 | BRB-084 |
|-------|-----|-------------------|---------------|----------------------|-----------------|
| | | SUBCOMPACT SERIES | | STANDARD DUTY SERIES | |
| | HP | 16-30 | 16-30 | 25-50 | 25-50 |
| | in | 48" | 60" | 72" | 84" |
| | lbs | 139 | 158 | 275 | 294 |
| | lbs | 189 | 208 | 325 | 344 |
| | | - | - | 14° | 14° |
| | | 16° | 16° | 16° & 32° | 16° & 32° |
| | in | 6" | 6" or 12" | 6" or 12" | 6" or 12" |
| | | \$ 730 | \$ 758 | \$ 1,046 | \$ 1,084 |

Standard duty series.

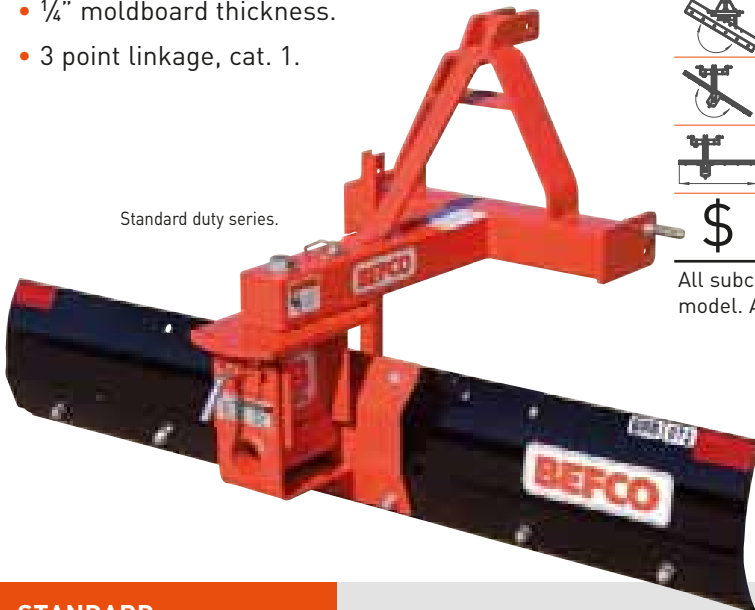


Subcompact series.




All subcompact and standard duty blades are crated 2 each of the same model. Add \$50 net for single order units.


STANDARD




Front or rear tractor mounting



Up to 32° angling on standard duty blades

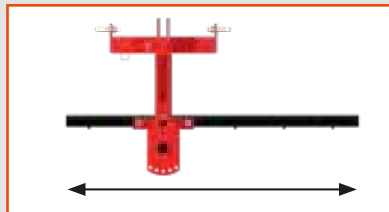

Up to 12" offset



Up to 14° tilt on standard duty blades

REAR BLADE HD

30-80 HP (22-60 KW)
cat. 1 & 2




Heavy duty rear blades

- 16 forward & 16 reverse positions.
- Right or left offset.
- 5 tilt positions.
- 3 point linkage, cat. 1 & 2.
- ½" x 6" heat treated reversible cutting blade.
- ¼" moldboard thickness.
- Reinforced moldboard for increased strength.




| MODEL | BRB-284 | BRB-296 |
|-------|-----------|-----------|
| HP | 30-80 | 30-80 |
| in | 84" | 96" |
| lbs | 524 | 561 |
| lbs | 602 | 644 |
| | 15° & 30° | 15° & 30° |
| | up to 60° | up to 60° |
| in | up to 21" | up to 21" |
| \$ | \$ 1,980 | \$ 2,129 |


STANDARD




Front or rear tractor mounting



Up to 60° angling

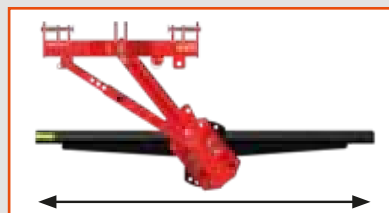

Up to 12" offset



Up to 30° tilt

LANDSCAPE RAKE


16-65 HP (12-48 KW)
cat. 1



- 5 forward & 5 reverse positions on standard duty series.
- 3 forward and 3 reverse on subcompact series.
- Sturdy frame construction.
- 2" center tine spacing.
- 2 hole tine 5/16" x 1" on standard duty series.
- 1 hole tine 5/16" x 1" on subcompact series.
- 3 point linkage, cat. 1.



STANDARD



Front or rear tractor mounting



Up to 32° angling on standard duty rakes

| | MODEL | BLR-C48 | BLR-C60 | BLR-072 | BLR-084 | BLR-096 |
|--|-------|-------------------|---------|----------------------|-----------|-----------|
| | | SUBCOMPACT SERIES | | STANDARD DUTY SERIES | | |
| | HP | 16-30 | 16-30 | 25-65 | 25-65 | 25-65 |
| | in | 48" | 60" | 72" | 84" | 96" |
| | lbs | 135 | 156 | 248 | 274 | 314 |
| | lbs | 180 | 198 | 293 | 319 | 359 |
| | | 16° | 16° | 16° & 32° | 16° & 32° | 16° & 32° |
| | N° | 24 | 30 | 36 | 42 | 48 |
| | | \$ 726 | \$ 834 | \$ 1,075 | \$ 1,211 | \$ 1,347 |

All subcompact and standard duty rakes are crated 2 each of the same model. Add \$50 net for single order units.

SICKLE BAR MOWERS

20-75 HP (15-56 KW)
540 rpm - cat. 1 & 2



- 3 point linkage, cat. 1 & 2.
- Double action sickle bar.
- Single action hydraulic cylinder with restrictor.
- Safety release standard on all units.
- Transport lock bar secures cutting bar for transport and storage.
- Transport blade guard standard.
- Equipped with cylinder stop to raise cutting bar using tractor's hydraulic system.
- Ideal for set-aside, conservation acreage and ditchbank mowing.
- Delivered with extra cutting blade.
- Will mow 90° up and 55° down.
- Heavy duty shielded pto shaft (1 3/8" ASAE cat. 4).




BSB-284




STANDARD



Spring loaded blade guides for quick and easy blade replacement



Easy to inspect and adjust belt tensioner



Cast aluminium connecting rods with cooling fins

| MODEL | BSB-272 | BSB-284 | BSB-296 |
|--------|-----------------|-----------------|-----------------|
| HP | 20-75 | 20-75 | 20-75 |
| in | 72" | 84" | 96" |
| in | 130" | 142" | 154" |
| lbs | 628 | 650 | 672 |
| lbs | 717 | 750 | 782 |
| mph | 9 | 9 | 9 |
| | Hydraulic | Hydraulic | Hydraulic |
| 1 3/8" | ASAE cat. 4 | ASAE cat. 4 | ASAE cat. 4 |
| \$ | \$ 6,393 | \$ 6,591 | \$ 7,305 |




FINGER WHEEL RAKES

16-80 HP (12-60 KW)
cat. 1



RS2-04V

- 3 point linkage, cat. 1.
- Cast steel hubs with greasable tapered bearings.
- Quick hitch compatible on models RS2-02R, RS2-03R, RS2-04V & RS2-06V
- Finger wheel rakes may also be used for spreading (2, 3, 4 & 6 wheel models only) or turning hay (RS2-04R & RS2-06R models only).
- Lifts hay gently, even from undulating terrain.
- Bent elbows allow better hay flow under heavy working conditions.

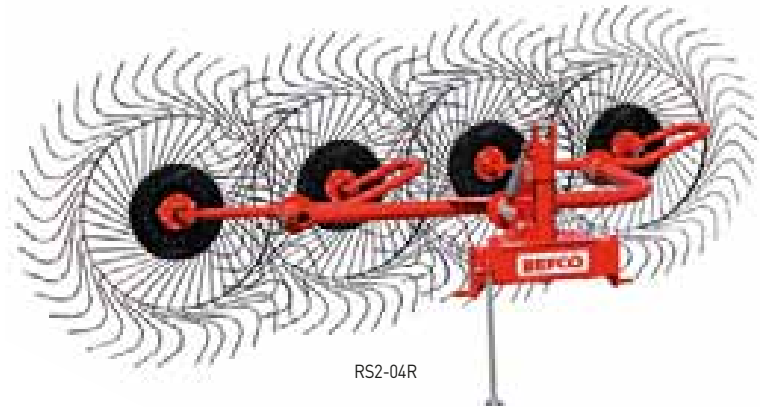

RS2-04R

STANDARD



Rakes can be used for raking, turning and spreading



Cast steel hubs with greasable tapered bearings

| MODEL | | RS2-02R | RS2-03R | RS2-04R | RS2-05R | RS2-06R | RS2-04V | RS2-06V |
|-------|------|---------|----------|----------|----------|----------|----------|----------|
| | HP | 16-30 | 16-30 | 30-80 | 30-80 | 30-80 | 16-30 | 16-30 |
| | N° | 2 | 3 | 4 | 5 | 6 | 4 | 6 |
| | Ø in | 56" | 56" | 56" | 56" | 56" | 56" | 56" |
| | N° | 40 | 40 | 40 | 40 | 40 | 40 | 40 |
| | Ø in | 3/32" | 3/32" | 3/32" | 3/32" | 3/32" | 3/32" | 3/32" |
| | ft | 4'3" | 6'5" | 8'6" | 11' | 12'9" | 11'6" | 15'10" |
| | ft | 7'4" | 8'4" | 4'9" | 7'5" | 7'5" | 10'2" | 12'7" |
| | ft | 7'6" | 10' | 12'10" | 14'6" | 17'3" | 7'6" | 10' |
| | mph | 14 | 14 | 14 | 14 | 14 | 14 | 14 |
| | lbs | 194 | 291 | 388 | 495 | 602 | 353 | 547 |
| | | \$ 752 | \$ 1,108 | \$ 1,484 | \$ 1,814 | \$ 2,167 | \$ 1,388 | \$ 2,053 |


NOTE: For left hand models order with "L" suffix. (ie. RS2-04L)



HRC-08V

FINGER WHEEL "V" RAKES

16-80 HP (12-60 KW)

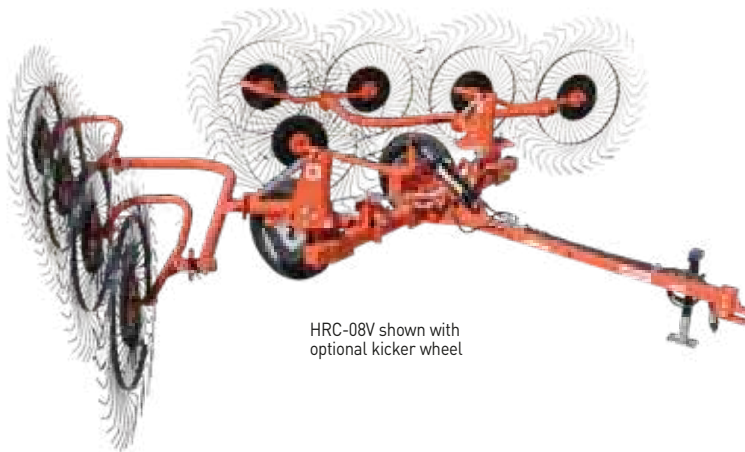


HRC-08V shown with optional kicker wheel

| HRC-08V | HRC-10V | HRC-12V |
|-----------------|-----------------|-----------------|
| 30-80 | 30-80 | 30-80 |
| 8 | 10 | 12 |
| 56" | 56" | 56" |
| 40 | 40 | 40 |
| 3/32" | 3/32" | 3/32" |
| 21'4" | 23'4" | 25'7" |
| 8' | 8' | 8' |
| 8'10" | 10' | 12'1" |
| 14 | 14 | 14 |
| 1,290 | 1,457 | 1,623 |
| \$ 5,910 | \$ 6,569 | \$ 7,275 |

- Working speed of up to 14 mph, low costs of maintenance, and ease of use make these units indispensable for raking hay.
- Floating rake wheels with spring steel tines follow ground contour evenly.
- Multiple adjustment capabilities allow operator to adjust raking width, windrow width and raking angle.
- Pull type 8, 10 and 12 wheel rakes with double action hydraulic cylinders for easy transportation and storage.
- Hydraulic ball valves allow for single side operation and lock rakes during transport and storage.
- Narrow 8' transport width allows rakes to be easily transported to different work locations.
- 8 and 12 wheel rakes may be adjusted to spread or turn crop.
- Optional center kicker wheel with additional hydraulic cylinder.

STANDARD



"V" rakes can be used for raking, turning and spreading



Two hydraulic cylinders with ball valves



Narrow 8" transport width




Springs adjust the pressure of the wheels to the ground

TEDDERS

20-60 HP (15-45 KW)
540 rpm




- Heavy frame construction.
- High strength steel tine arms.
- Large diameter 15" x 6" pneumatic tires.
- Easy pull type hook up.
- Heavy duty shielded PTO shaft with ratchet torque limiter.
- Spring steel double hay tines.
- Sturdy guard rail for added safety.

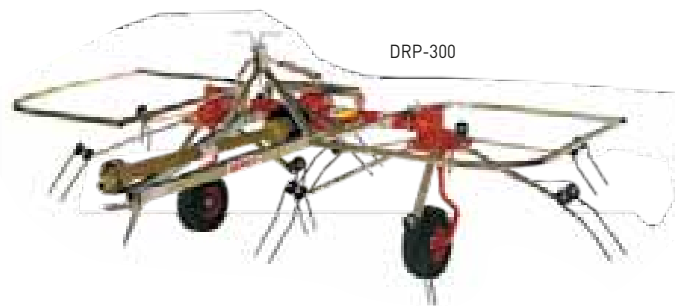

| MODEL | DRP-300 | DRP-480 |
|-----------|---------------------------------------|---------------------------------------|
| HP | 20-50 | 30-60 |
| ft | 10' | 16' |
| lbs | 408 | 738 |
| N° | 2 | 4 |
| N° | 6 | 6 |
| 1 3/8" | ASAE cat. 2 ratchet torque limiter | ASAE cat. 4 ratchet torque limiter |
| \$ | \$ 3,570 | \$ 7,116 |

All DRP-300 are crated 2 each. Add \$50 net for single order units.

STANDARD



DRP-480 double yoke joint transmission



DRP-480 in transport position



WINDROWER RAKES

20-50 HP (15-37 KW)
540 rpm - cat. 1 & 2










STANDARD




Heavy duty gearbox with raking depth adjustment handle







- Heavy frame construction.
- Heavy duty shielded PTO shaft (1 3/8" ASAE cat. 1) with ratchet torque limiter.
- Tubular steel tine arms.
- Large diameter pneumatic tires.
- Spring steel double hay tines.
- Easy tine arm removal system.
- Sturdy guard rail for added safety.
- Angled tines for high clearance.
- 3 point linkage, cat. 1 & 2.

| MODEL | DR0-308 | |
|---|---------|------------------------------------|
|  | HP | 20-50 |
|  | ft | 10' |
|  | lbs | 650 |
|  | N° | 8 |
|  | N° | 3 |
|  | 1 3/8" | ASAE cat. 1 ratchet torque limiter |
|  | | \$ 5,291 |

QUICK HITCH



- ASABE cat. 1 Quick Hitch.
- Works with all BEFCO cat. 1 Quick Hitch compatible implements.
- Look for the  symbol throughout the catalog for compatible implements.
- Optional floating Quick Hitch Adapter for C30, C50 & C70 grooming mowers. Adapter allows mowers to maintain its full float capability while using Quick Hitch.
- Optional Quick Hitch adapter available for Hop 203 fertilizer spreader.

| MODEL | QH1-100 | |
|---|---------|---------|
|  | | Cat. 1 |
|  | in | 30 1/2" |
|  | in | 22" |
|  | in | 8" |
|  | lbs | 57 |
|  | | \$ 504 |

OPTIONALS




OPTIONALS CYCLONE C30-CE5

005-600

• Mulching kit

\$ 382



001-600

• Front antiscalping roller

\$ 127




OPTIONALS CYCLONE C30

• Mulching kit

004-600 C30-RD4 \$ 329

005-600 C30-RD5 \$ 382

006-600 C30-RD6 \$ 409



001-600

• Front antiscalping roller


\$ 127



001-700

• Quick hitch adapter

\$ 452



OPTIONALS CYCLONE C50

• Mulching kit

005-700 C50-RD5 \$ 394

006-700 C50-RD6 \$ 449

007-700 C50-RD7 \$ 525



009-9915

• Front antiscalping roller
(standard on C50-RD7 model)

\$ 144



• Rear roller kit

009-9941 C50-RD5 \$ 813

009-9942 C50-RD6 \$ 840


009-9943 C50-RD7 \$ 864



002-800

• Quick hitch adapter

\$ 423




OPTIONALS CYCLONE C70

002-800

• Quick hitch adapter

\$ 423



OPTIONALS CYCLONE FLEX

009-9817

• Hydraulic unlocking system

\$ 606



• Mulching kit

009-9556

312-FLX \$ 1,130

009-9557

315-FLX \$ 1,237

009-9558

317-FLX \$ 1,347



009-9597

• Floating hitch, additional

\$ 279



009-9599

• Roadway kit

\$ 492



• Rear roller kit

009-9945 312-FLX \$ 2,387

009-9946 315-FLX \$ 2,466

009-9947 317-FLX \$ 2,520




OPTIONALS CYCLONE SUPER FLEX

009-9817

• Hydraulic unlocking system

\$ 606



• Mulching kit

009-9556

412-SFL \$ 1,130

009-9557

415-SFL \$ 1,237

009-9558

417-SFL \$ 1,347

009-9559

420-SFL \$ 1,575



009-9597

• Front floating hitch, additional


\$ 279



009-9599

• Roadway kit

\$ 492





• Rear roller kit

009-9950 412-SFL \$ 2,449

009-9951 415-SFL \$ 2,526

009-9952 417-SFL \$ 2,577

009-9953 420-SFL \$ 2,655

OPTIONALS HURRICANE H40

009-9507

• Side skids

\$ 118



009-9560

• Overrunning clutch for driveline

\$ 153



• Rotor with dethatching blades (factory installed)

DBD48H40 H40-048 net \$ 326

DBD60H40 H40-060 net \$ 366

DBD72H40 H40-072 net \$ 395



• Rotor with reverse "Y" blades (factory installed)

YBD48H40 H40-048 net \$ 205

YBD60H40 H40-060 net \$ 205

YBD72H40 H40-072 net \$ 205



• Rotor with triangular paddle blades (factory installed)

TBD48H40 H40-048 net \$ 205

TBD60H40 H40-060 net \$ 205

TBD72H40 H40-072 net \$ 205



• Rotor with hammers (factory installed)

HBD48H40 H40-048 net \$ 332

HBD60H40 H40-060 net \$ 423

HBD72H40 H40-072 net \$ 496

OPTIONALS HURRICANE H40-S

009-9206

• Side skids

\$ 138



009-9560

• Overrunning clutch for driveline

\$ 153




• Rotor with dethatching blades (factory installed)

DBD48H40 H40-S48 net \$ 326

DBD60H40 H40-S60 net \$ 366

DBD72H40 H40-S72 net \$ 395




• Rotor with reverse "Y" blades (factory installed)

YBD48H40 H40-S48 net \$ 205

YBD60H40 H40-S60 net \$ 205

YBD72H40 H40-S72 net \$ 205



• Rotor with triangular paddle blades (factory installed)

TBD48H40 H40-S48 net \$ 205

TBD60H40 H40-S60 net \$ 205

TBD72H40 H40-S72 net \$ 205




• Rotor with hammers (factory installed)

HBD48H40 H40-S48 net \$ 332

HBD60H40 H40-S60 net \$ 423

HBD72H40 H40-S72 net \$ 496

009-9207 • Hydraulic cylinder for side shift **\$ 447**




• Front steel deflectors

| | | |
|-----------------|---------|---------------|
| 009-9208 | H40-S48 | \$ 169 |
| 009-9209 | H40-S60 | \$ 203 |
| 009-9210 | H40-S72 | \$ 245 |




RVRXXH40 • Reverse rotation (factory installed) **net \$ 307**




OPTIONALS HURRICANE H70

009-9691 • Gauge wheels with laminated tires H70 **\$ 1,060**



009-9701 • Gauge wheels with laminated tires H80 **\$ 1,257**



• Rotor with dethatching blades (factory installed)

| | | |
|-----------------|---------|-------------------|
| DBD60H70 | H70-060 | net \$ 366 |
| DBD72H70 | H70-072 | net \$ 406 |
| DBD88H70 | H70-088 | net \$ 446 |



• Rotor with reverse "Y" blades (factory installed)

| | | |
|-----------------|---------|-------------------|
| YBD60H70 | H70-060 | net \$ 205 |
| YBD72H70 | H70-072 | net \$ 205 |
| YBD88H70 | H70-088 | net \$ 205 |



• Rotor with triangular paddle blades (factory installed)

| | | |
|-----------------|---------|-------------------|
| TBD60H70 | H70-060 | net \$ 205 |
| TBD72H70 | H70-072 | net \$ 205 |
| TBD88H70 | H70-088 | net \$ 205 |




• Rotor with hammers (factory installed)

| | | |
|-----------------|---------|-------------------|
| HBD60H70 | H70-060 | net \$ 423 |
| HBD72H70 | H70-072 | net \$ 510 |
| HBD88H70 | H70-088 | net \$ 598 |




RVRXXH70 • Reverse rotation (factory installed) **net \$ 307**




OPTIONALS DESTROYER D90

GDTXXD90 • Gearbox with dual PTO (factory installed) **net \$ 275**



009-9969 • Side skirts **\$ 246**



OPTIONALS
BM6-2HR

BM6-000 • 15" blower pipe extension **\$ 164**



OPTIONALS
TORNADO BRC

009-9986 • Side skids **\$ 44**




OPTIONALS
TILL-RITE T30

RVRXXT30 • Reverse rotation (factory installed) **net \$ 307**



OPTIONALS
TILL-RITE T40



• Aerator rotor

| | | |
|-----------------|------------------|-----------------|
| 009-9852 | T40-150, T40-250 | \$ 1,104 |
| 009-9853 | T40-158, T40-258 | \$ 1,293 |
| 009-9854 | T40-166, T40-266 | \$ 1,502 |

RVRXXT40 • Reverse rotation **net \$ 307**



OPTIONALS TILL-RITE T50

RVRXT50

• Reverse rotation (factory installed)

net \$ 307



OPTIONALS TILL-RITE T60

RVRXT60

• Reverse rotation (factory installed)

net \$ 307



OPTIONALS TILL-RITE T70

RVRXT70

• Reverse rotation (factory installed)

net \$ 307



OPTIONALS GREEN-RITE GRT

009-9875

• Gauge wheels for all models

\$ 427



• Front roller

009-9648

GRT-250

\$ 677

009-9516

GRT-258

\$ 715

009-9563


GRT-266

\$ 774

009-9566

GRT-282

\$ 835



Note: units may utilize gauge wheels or front roller for depth control, but not both

• Tiller rotor

009-9649

GRT-250

\$ 669

009-9517

GRT-258

\$ 756

009-9564

GRT-266

\$ 840

009-9567

GRT-282

\$ 1,563



• Rear roller scraper

009-9189

GRT-250

\$ 234

009-9539

GRT-258

\$ 268

009-9565

GRT-266

\$ 373

009-9568

GRT-282

\$ 425






• Cast iron roller rings (factory installed)

CSR50GRT GRT-250 net \$ 487

CSR58GRT GRT-258 net \$ 540

CSR66GRT GRT-266 net \$ 593

CSR82GRT GRT-282 net \$ 719



• Seed conveyor kit

009-9139 GRT-250 \$ 98

009-9140 GRT-258 \$ 115

009-9141 GRT-266 \$ 129

009-9142 GRT-282 \$ 161

OPTIONALS SEED-RITE SRT

CSR74SRT

• Cast iron roller rings (factory installed)

net \$ 1,485



009-9985

• Seed rate speed reduction kit

\$ 85



009-9138

• Seed conveyor kit


\$ 145



009-9930

• Rear expanded roller frame for seed covering/
dethatching with adjustable tickler tines

\$ 612




OPTIONALS MOLE 200 / 300

009-9851

• Hook-up stand all models

\$ 450



009-9154

• Hydraulic down force kit 200-512


\$ 677



009-9155

• Hydraulic down force kit 300-512 & 400-512 model

\$ 694



PHD-003

• Auger positioning handle all models

\$ 165



OPTIONALS BABY-HOP POLY BABY-HOP

AA1-120

• Deflector shield


\$ 104



009-9856

• Remote gate control


\$ 367





| | | | | |
|---|----------------|-----------------|--------------------|--------|
|  | • Hopper cover | 009-9720 | for all 103 models | \$ 224 |
| | | 009-9721 | for all 106 models | \$ 233 |


OPTIONALS


HOP POLY-HOP


| | | |
|---|--|-------|
| 009-9979 | • Tumbling style agitator for all 203 models | \$ 87 |
|  | | |


| | | |
|--|---|-------|
| 009-9978 | • Tumbling style agitator for all 206, 209 & 212 models | \$ 87 |
|  | | |


| | | |
|---|---|--------|
| 009-9458 | • Side row discharge for all 209 & 212 models | \$ 438 |
|  | | |

| | | |
|--|---|--------|
| 009-9524 | • Deflector shield for all 203 & 206 models | \$ 104 |
|  | | |


| | | |
|--|---|--------|
| 009-9638 | • Deflector shield for all 209 & 212 models | \$ 199 |
|  | | |

| | | |
|---|--|--------|
| 009-9856 | • Remote gate control for all 203 models | \$ 367 |
|  | | |

| | | |
|---|---|--------|
| 009-9850 | • Remote gate control for all 206, 209 & 212 models | \$ 367 |
|  | | |


| | | |
|--|---|--------|
| 009-9913 | • Filter grate for all 209 & 212 models | \$ 500 |
|  | | |


| | | | | |
|---|----------------|-----------------|--------------------|--------|
|  | • Hopper cover | 009-9720 | for all 203 models | \$ 224 |
| | | 009-9721 | for all 206 models | \$ 233 |
| | | 009-9722 | for all 209 models | \$ 250 |
| | | 009-9723 | for all 212 models | \$ 258 |

| | | |
|--|--|-------|
| 009-9239 | • Quick hitch adapter for all 203 models | \$ 46 |
|  | | |

OPTIONALS

TURBO-HOP 301


| | | |
|---|---------------------------------|--------|
| 009-9452 | • Short spout for sand and salt | \$ 336 |
|  | | |

| | | |
|--|-----------------------------------|--------|
| 009-9451 | • Rubber insert for damp material | \$ 121 |
|  | | |


009-9453 • Agitator extension \$ 200




009-5370 • Left only & right only directional attachment \$ 82




001-4984 • Locking nut for spout \$ 52



009-9913 • Filter grate \$ 500




009-9456 • Hydraulic control \$ 729




• Hopper cover

| | | |
|-----------------|---------|--------|
| 009-9722 | 301-300 | \$ 250 |
| 009-9723 | 301-400 | \$ 258 |




OPTIONALS TURBO-HOP 303

009-9452 • Short spout for sand and salt \$ 336




009-9451 • Rubber insert for damp material \$ 121




009-9454 • Agitator extension \$ 200




009-5370 • Left only & right only directional attachment \$ 82




001-4984 • Locking nut for spout \$ 52



009-5410 • Filter grate \$ 475




009-9457 • Hydraulic control \$ 729



• Hopper cover

| | | |
|-----------------|---------|--------|
| 009-9725 | 303-600 | \$ 284 |
| 009-9726 | 303-800 | \$ 291 |
| 009-9727 | 303-999 | \$ 305 |



OPTIONALS

CORE AERATOR SD



- Steel weight sand tank, price per unit

| | | |
|-----------------|---------|--------|
| 009-9731 | BCA-048 | \$ 305 |
| 009-9732 | BCA-060 | \$ 318 |
| 009-9733 | BCA-072 | \$ 332 |



- Unit with spikes instead of spoons (factory installed)

| | | |
|-----------------|---------|------------|
| SP048BCA | BCA-048 | net \$ 332 |
| SP060BCA | BCA-060 | net \$ 414 |
| SP072BCA | BCA-072 | net \$ 492 |

FRTSDBC

- Front mounted (factory installed)

net \$ 205



OPTIONALS

CORE AERATOR HD



- Steel weight sand tank, price per unit

| | | |
|-----------------|---------|--------|
| 009-9734 | BCA-260 | \$ 358 |
| 009-9735 | BCA-272 | \$ 385 |



- Unit with spikes instead of spoons, (factory installed)

| | | |
|-----------------|---------|------------|
| SP260BCA | BCA-260 | net \$ 568 |
| SP272BCA | BCA-272 | net \$ 723 |

FRTHDBC


- Front mounted (factory installed)

net \$ 205



OPTIONALS

SOIL PULVERIZERS SD




- 2nd rear roller assembly \varnothing 5"

| | | |
|-----------------|---------|--------|
| 009-9887 | BPL-048 | \$ 546 |
| 009-9636 | BPL-060 | \$ 635 |
| 009-9637 | BPL-072 | \$ 774 |

OPTIONALS

SOIL PULVERIZERS HD




- 2nd rear roller assembly Ø 5 7/16"

009-9646 BPL-272 \$ 904

009-9647 BPL-284 \$ 973

OPTIONALS

REAR BLADE SD




BRB-001

- Skid shoes

\$ 85

OPTIONALS

REAR BLADE HD



BRB-001

- Skid shoes

\$ 85



BRB-002

- Hydraulic offset control

\$ 342

OPTIONALS

LANDSCAPE RAKE BLR



009-9159

- Gauge wheels (standard duty series)

\$ 582



BLR-002

- Gauge wheels (subcompact series)

\$ 436

OPTIONALS

FINGER WHEEL "V" RAKES

009-9982

• Kicker wheel for HRC models
(includes hydraulic cylinder)

\$ 631



OPTIONALS

TEDDERS

009-9966

• Hydraulic lift kit for model DRP-480

\$ 1,157



**USE ONLY
BEFCO ORIGINAL SPARE PARTS**

FOR YOUR REFERENCE:

Dealer Account number

Rep name

Rep telephone

Sales telephone

(800) 334-6617

Sales fax

(252) 977-9718

Sales e-mail

sales@befco.com

Parts telephone

(877) 663-3458

Parts fax

(800) 265-6962

Parts e-mail

parts@befco.com

LIMITED WARRANTY

BEFCO's responsibility will be limited to the substitution of the acknowledged defective merchandise to the same place of delivery as the previous one was supplied.

1. LIMITED WARRANTY

BEFCO, Inc. herein referred to as the Company, warrants its machines and related accessories, hereafter referred to as the Machine, to be free from defects in material and workmanship, for a period of twelve (12) months from the date of invoice to the first registered owner; **this limited warranty does not apply to and excludes shear bolt and/or slip clutch, oil, grease, tires, tubes, hydraulic hoses, knives, blades, augers, and PTO shafts.** Labor will be reimbursed at \$40.00 per hour based on BEFCO's time schedule.

Cost of transport to the servicing dealer is the responsibility of the customer.

Warranty coverage shall not be transferable from the first owner to any subsequent owner.

2. DISCLAIMER OF ALL OTHER WARRANTIES AND REMEDIES

Neither the Company nor any company affiliated with the Company makes any warranties, expressed or implied, as to the quality, performance or application of its products other than those set forth herein and does not make any implied warranty of merchantability or fitness. The only remedies the purchaser has in connection with the breach, or performance of any warranty on the Company's Machine are those set forth herein. In no event will the dealer, the Company, or any company affiliated with the Company be liable for:

- (a) Injuries or damages of any kind of nature, direct, consequential or contingent to person or property.
- (b) Any expenses incurred by the owner to repair, replace or rework any allegedly defective item.
- (c) Any loss, cost, forfeiture or damages (including loss of profits; loss of crops; loss because of delay in field operations; any expense or loss incurred for labor, supplies, substitute machine rental; liabilities of the owner to its customers or third persons; and all other consequential damages, losses, liabilities or damages for any other reasons; whether direct or indirect, and whether or not resulting from or contributed to by the default or negligence of the Company, its agents, employees and subcontractors which might be claimed as a result of the use or failure of the equipment delivered.

The Company's liability based on this limited warranty or any other applicable laws shall be limited to replacement or refund of the purchase price of the product.

The limited warranty extended herein gives you specific rights and you may also have other rights which vary from state to state. Neither the dealer nor the Company personnel has the authority to make any representation or to modify the terms and limitations of this warranty in any way. Other than the limited warranty extended hereby, there is no other expressed warranty in connection with the design, safety or use of any of the Company's products except as to title. All implied warranties are expressly disclaimed pursuant to the terms of this warranty.

3. CUSTOM WORK

If the Machine is used for commercial purposes, such as custom work, the period warranted for the Machine is limited to 180 days from the date of delivery to the first registered owner and does not cover any labor charges incurred.

4. RENTAL

If the Machine is used for rental purposes the period warranted for the Machine is limited to thirty (30) days from the date of delivery to the first registered owner and does not cover any labor charges incurred.

5. REGISTRATION

In order to qualify for coverage on this limited warranty, the product and name of the original purchaser must be registered with the Company by mailing a completed Machine Pre-Delivery Checklist and Warranty Registration along with a copy of the dealer's invoice to the first registered owner to the Company within fourteen (14) days after the date of delivery to the original purchaser.

6. WARRANTY SERVICE

Warranty Service must be performed by a dealer authorized by BEFCO. If the warranty service requested is approved, the owner shall pay only for labor beyond the rate allowed, for overtime labor, and for any mileage charge for transporting the equipment to and from the dealer's shop. It is assumed that the dealer has the appropriate general and special tools to service the Machine. Time required for replacement of knives, oil, grease and to remove excessive dirt from the Machine is not subject to reimbursement by the Company. The owner is required to clean the Machine before presenting it to the dealer for service work. The Machine must be delivered within thirty (30) days after failure date by the owner to the dealer to be eligible for warranty consideration.

7. UNAPPROVED SERVICE OR MODIFICATION

All obligations of the Company under this limited warranty shall be terminated if:

- (a) Proper service and operation Instructions, as outlined in the Operator's Manual and on the instruction sticker on the Machine, are not followed.
- (b) The Machine is modified or altered in any way not approved by the Company.
- (c) The Company does not receive a copy of the dealer's invoice to the first registered owner within fourteen (14) days from the date of delivery.
- (d) The Company has not been paid in full, by the dealer, for the Machine.

8. ACCIDENTS AND NORMAL MAINTENANCE

This limited warranty covers defective material and workmanship. It does not cover depreciation or damage caused by normal wear, accidents, improper maintenance, or improper use. The costs of normal maintenance or repairs for accidents or improper use, and related labor, will be borne by the owner.

GENERAL SELLING CONDITIONS

The purpose of the **Befco**® Sales Program is two-fold. First, the program is designed to offer **Befco** dealers, distributors and retailers purchasing directly from **Befco** (each direct purchaser, referred to as "Buyer") an incentive for early booking of orders and to provide financing for Buyers to maintain an adequate inventory of **Befco** brand wholegoods (the "Equipment") prior to and during the selling season. Second, the program enables **Befco** to plan production requirements more accurately in order to make Equipment available on a timely basis. This combination of incentives and financing places **Befco** and its Buyers in a position to achieve a greater market share within a competitive environment. Although **Befco** offers quantity discounts, **Befco** does not require any **Befco** Buyer to purchase or maintain any minimum quantity of Equipment. The **Befco** Buyer may elect at its sole discretion to purchase a sufficient quantity of Equipment to maintain a regular inventory, or may elect to order Equipment only as desired or needed to meet custom requests. The inventory program and level of inventory shall be in the Buyer's discretion. All such orders will be processed in accordance with the Sales Program and these General Selling Conditions in effect. The following information provides details of the **Befco** Sales Program Terms and Conditions.

1. Requirements to Qualify: The terms of sale to Buyers are applicable only to Equipment purchased directly from **Befco**. **Products covered by any order accepted by Befco will be shipped at prices, terms and discounts in effect at time of order unless otherwise specified. The terms and conditions contained herein are subject to change without notice.**

2. Credit Approval: All orders or shipping instructions will be subject to approval by **Befco** prior to shipment. Copies of current Buyer's financial statements are required annually, and signed Security Agreements must be on file where applicable.

3. Trade Discounts: A trade discount may be allowable pursuant to **Befco's** current suggested list price on Equipment.

4. Qualifying and Non-Qualifying Buyers: **Befco** has the right to classify Buyers as either qualifying or non-qualifying; thereby changing the trade discount as indicated in the schedule of Terms and Discounts.

5. Accumulative Quantity Discounts: Accumulative Quantity Discounts are allowed on all **Befco** Equipment and accessories to **Befco Buyers** and are subject to the following conditions:

- Accumulative Quantity Discounts accumulate with each new order, but are not retroactive and will apply only during periods as defined in the current suggested retail price listing or schedule of Terms and Discounts.
- Shipments of Pre-Season Orders will be made at the Company's convenience.
- The Accumulative Quantity Discount is calculated after deducting the Trade Discount.
- Units not paid by the due date will be subject to loss of the Accumulative Quantity Discount plus 1% monthly service charge until paid in full.

6. Cash Discount: Cash discounts are determined by the date of invoice to the Buyer and are calculated on the net balance after all applicable discounts. See specific programs for schedule of cash discounts.

7. Settlement: Payment for Equipment is due immediately following delivery to Buyer's customer, or as specified by invoice due date whichever is earlier. **Any equipment not paid for immediately after delivery to Buyer's customer is considered "out-of-trust" and all discounts are voided and full list price shall be immediately due and payable.**

8. Past Dues & Legal: Past due accounts will have a service charge of 1% per month. Cost of attorney fees for collections of past due accounts will be borne by the Buyer.

9. Requested Shipping Dates & Discounts: Pre-Season Orders will be shipped at **Befco's** convenience. Refusal by the Buyer to accept shipment will disqualify the order. It is the intent of **Befco** to keep freight costs to a minimum, therefore requesting specific shipping dates is not acceptable.

10. Freight Policy:

- All prices are F.O.B. Rocky Mount, North Carolina.
- Pre-Season at **Befco's** convenience. The rate is published each year in the **Befco Terms and Discounts** freight rate section.
- No freight will be charged if the Buyer picks up the Equipment at the Rocky Mount factory.
- Emergency and urgent In-Season shipments will be shipped LTL freight collect.**
- Units from depot outside Rocky Mount, North Carolina, will be shipped LTL Freight Collect. This is in addition to a back freight charge.
- All freight invoices are due Net 30 Days. Past due freight invoices will be charged the standard 1% per month service charge.
- Befco** is not responsible for Equipment or parts damaged or lost in transit.
- The Buyer is responsible for filing a freight claim with the trucking company for lost or damaged Equipment.
- Any applicable duties or tariffs will be the responsibility of and must be paid by the Buyer or other party receiving the order.
- All parts orders are shipped F.O.B. Rocky Mount, N.C.

11. Buyer Inspection/Acceptance; Returns: Buyer shall inspect all Equipment within ten (10) days following delivery (the "Inspection Period") and shall notify the freight forwarder and **Befco** of any claim for damages or shortages. To reject a unit of Equipment for nonconformity with the specifications set forth in **Befco's** documentation for that unit in effect at the time of Buyer's purchase order for such unit, Buyer shall notify **Befco**, within the Inspection Period, in writing of its rejection and shall promptly return the rejected unit in original condition to **Befco**, with insurance and freight prepaid. After receipt of the properly rejected unit, **Befco** at its option shall either repair or replace such properly rejected unit or refund any purchase price paid by Buyer, along with Buyer's return cost of transportation. **Befco** will prepay transportation charges for repaired/replacement units back to Buyer and will reimburse Buyer for the cost of transportation incurred by Buyer in connection with the return of properly rejected units. Any unit not properly rejected within the Inspection Period shall be deemed accepted.

12. Standard Limited Warranty: Buyer shall pass on to his customers **Befco's** standard limited warranty or warranties for the **Befco** Equipment, as such warranty or warranties may be amended from time to time by **Befco**. **Befco** shall not be liable for any other warranties or similar obligation made or given by Buyer.

Except for the standard limited warranty to end user customers of Befco Equipment; Befco grants no other warranties, express or implied, by statute or otherwise, regarding the equipment, their fitness for any purpose, their quality, their merchantability or otherwise. In no event shall Befco be liable for any special, consequential or incidental damages for breach of warranty or any special, consequential or incidental damages, including injury or damage to business, earnings, profits or goodwill suffered by Buyer or any other person and caused directly or indirectly by the equipment sold.

13. Technical and Price Information: Technical information provided in the catalog is approximate. **Befco** reserves the right to modify or improve the models listed for technical or commercial purposes and all prices are subject to change without notice.

BEFCO



BEFCO, Inc.
1781 South Wesleyan Blvd.
P.O. Box 6036
Rocky Mount, NC 27802-6036
Tel: 252.977.9920 - Fax: 252.977.9718
www.befco.com



All rights reserved. It is unlawful to copy, reprint or use any of the information or details indicated in this document without the expressed permission of BEFCO, Inc. Rocky Mount, NC. Technical information provided in this document is approximate, the Company reserves the right to modify or improve the models shown for technical or commercial purposes. Pictures in this manual do not necessarily show the machine as delivered.