#### Landscaping

#### **PB1001 Integral One Bottom Turning Plow**


Equipment for Base Machine

Hitch:
Lift-type, Category I,
not iMatch Compatible
One, 14 In. (355.6 mm) Moldboard
Transport Length:
45 In. (1,143 mm)
Transport Width:
33 In. (838.2 mm)
Transport Height:
40.5 In. (1,028.7 mm)
Tractor Engine HP Range:
25 - 50 HP

Moldboard Dimensions: 14 In. (355.6 mm) (W) x 21 In. (533.4 mm) (L) x 16 In. (406.4 mm) (H) Parking Stand Included

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
3431XF		BASE MACHINE PB1001 Integral One Bottom Turning Plow	953.00
<u></u>		Order in multiples of two.	933.00
		OPERATOR'S MANUAL AND DECALS	
904J		French OM & Decal Kit (PB10)	15.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5TITE511154	<b>Miscellaneous</b> French Kit - Includes Operator's Manual, Parts Catalog and Safety Decals <i>PB1001 and PB1002</i>	15.40

Landscaping

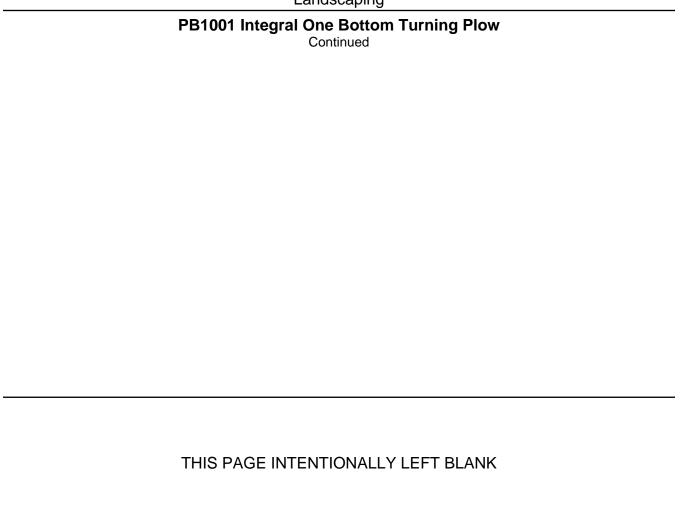

#### Landscaping

#### **PB1002 Integral Two Bottom Turning Plow**

Equipment for Base Machine

Hitch:
Lift-type, Category I,
not iMatch Compatible
Two, 14 In. (355.6 mm) Moldboards
Transport Length:
71 In. (1,803.4 mm)
Transport Width:
40 In. (1,016 mm)
Transport Height:
40.5 In. (1,028.7 mm)
Tractor Engine HP Range:

25 - 50 HP Moldboard Dimensions: 14 In. (355.6 mm) (W) x 21 In. (533.4 mm) (L) x 16 In. (406.4 mm) (H)

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3432XF		PB1002 Integral Two Bottom Turning Plow Order in multiples of two.	1,579.00
		OPERATOR'S MANUAL AND DECALS	
904J		French OM & Decal Kit (PB10)	15.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5TITE511154	Miscellaneous French Kit - Includes Operator's Manual, Parts Catalog and Safety Decals PB1001 and PB1002	15.40

Landscaping

PB1002 Integral Two Bottom Turning Plow Continued	

#### Landscaping

#### **BB2048 Standard Duty Box Blade**

**Equipment for Base Machine** 

3-Point Hitch:
Category I
iMatch Compatible: Yes
Working Width: 48 In.
Tractor HP: 17 to 45 HP
Tailgate: Fixed
Shipping Weight:
758 lbs. - (Pair)
Shanks: (4) Replaceable
Shank Type:
3-Position with Holes and 1/2 In. Pin
Scarifier Points:
Replaceable, Hardened Steel
End Plate Thickness: 3/8 In.
Moldboard Thickness: 3/16 In.

Moldboard Type: Formed Back
Mast: Bolt-up with 1/4 In. Plates
Duty: Standard Duty
Cutting Edges:
(2) 1/2 In. x 6 In. Reversible
Assembly/Set up Time:
30 Minutes (Approximate) - Per Pair
Approximate Operating Weight: 355 lbs.
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	]
		BASE MACHINE	
1041XF		BB2048 Standard Duty Box Blade Order in multiples of two.	1,164.00
		OPERATOR'S MANUAL AND DECALS	
9200		French Operator's Manual and Decal Kit (BB20 and BB21 Series)	55.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5WS101371	Miscellaneous French Operator's Manual and Decal Kit (BB20, BB21 and BB20L Series)	57.20

## Landscaping

**BB2048 Standard Duty Box Blade** Continued

THIS	SPA	GF II	NTFN	ITIONAL	IYIFF	T BLANK
	<i>-</i>	$\circ$	<b>1</b>   L   1	4 I I O I 4/ \L		

#### Landscaping

#### BB2048L Limited Category I Standard Duty Box Blade

Equipment for Base Machine

Capacity:
6.6 Cubic Foot
Tractor HP (Maximum): 25 HP
Cutting Edges:
(2) 1/2 In. x 6 Reversible
Scarifier Shanks:
3-Position with Holes
Scarifier Shank Points:
3 Replaceable, Hardened Points
Beam Size: 4 In. x 4 In. x 1/4 In.
Beam Reinforcement:
3/8 In. x 1 In. Bar Inside Tube
End Plate Thickness: 3/16 In.
Working Width: 48 In.
Height: 14 In.
Depth: 17 In.
Tailgate: Fixed

3-Point Hitch:
Limited Category I (Aftermarket
Category 0 Lift Pins Available)
Mast Design:
Bolt-up with 1/4 In. Plates
Moldboard Thickness: 7 Gauge
Assembly/Set-up Time:
30 Minutes (Approximate)
Approximate Operating Weight: 275 lbs.
Shipping Weight: 636 lbs.
Packaged 2 per Pallet

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1051XF		BB2048L Limited Category I Standard Duty Box Blade Order in multiples of two.	985.00
		OPERATOR'S MANUAL AND DECALS	
9200		French Operator's Manual and Decal Kit (BB20 and BB21 Series)	55.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5WS101371	Miscellaneous French Operator's Manual and Decal Kit (BB20, BB21 and BB20L Series)	57.20

Landscaping

# BB2048L Limited Category I Standard Duty Box Blade Continued

#### Landscaping

#### **BB2060 Standard Duty Box Blade**

**Equipment for Base Machine** 


3-Point Hitch:
Category I
iMatch Compatible: Yes
Working Width: 60 In.
Tractor HP: 19 to 55 HP
Tailgate: Fixed
Shipping Weight:
918 lbs. - (Pair)
Shanks: (4) Replaceable
Shank Type:
3-Position with Holes and 1/2 In. Pin
Scarifier Points:
Replaceable, Hardened Steel
End Plate Thickness: 3/8 In.
Moldboard Thickness: 3/16 In.

Moldboard Type: Formed Back
Mast: Bolt-up with 1/4 In. Plates
Duty: Standard Duty
Cutting Edges:
(2) 1/2 In. x 6 In. Reversible
Assembly/Set-Up Time:
30 Minutes (Approximate) - Per Pair
Approximate Operating Weight: 425 lbs.
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	]
		BASE MACHINE	
1042XF		BB2060 Standard Duty Box Blade Order in multiples of two.	1,271.00
		OPERATOR'S MANUAL AND DECALS	
9200		French Operator's Manual and Decal Kit (BB20 and BB21 Series)	55.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5WS101371	Miscellaneous French Operator's Manual and Decal Kit (BB20, BB21 and BB20L Series)	57.20

#### Educational Services Commission of New Jersey NJ State Approved Co-op #65MCESCCPS FRONTIER PRODUCTS Grounds Equipment - Bid #ESCNJ 18/19-25

#### Landscaping

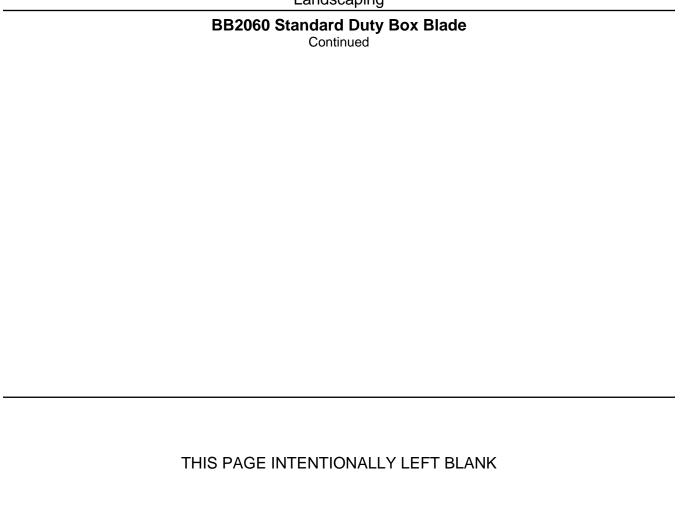

#### Landscaping

#### **BB2065 Standard Duty Box Blade**

**Equipment for Base Machine** 

3-Point Hitch:
Category I
IMatch Compatible: Yes
Working Width: 66 In.
Tractor HP: 23 to 55 HP
Tailgate: Fixed
Shipping Weight:
988 lbs. - (Pair)
Shanks: (4) Replaceable
Shank Type:
3-Position with Holes and 1/2 In. Pin
Scarifier Points:
Replaceable, Hardened Steel
End Plate Thickness: 3/8 In.
Moldboard Thickness: 3/16 In.

Moldboard Type: Formed Back
Mast: Bolt-up with 1/4 In. Plates
Duty: Standard Duty
Cutting Edges:
(2) 1/2 In. x 6 In. Reversible
Assembly/Set up Time:
30 Minutes (Approximate) - Per Pair
Approximate Operating Weight: 460 lbs.
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1043XF		BB2065 Standard Duty Box Blade Order in multiples of two.	1,386.00
		OPERATOR'S MANUAL AND DECALS	
9200		French Operator's Manual and Decal Kit (BB20 and BB21 Series)	55.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5WS101371	Miscellaneous French Operator's Manual and Decal Kit (BB20, BB21 and BB20L Series)	57.20

## BB2065 Standard Duty Box Blade Continued

#### Landscaping

#### **BB2072 Standard Duty Box Blade**


**Equipment for Base Machine** 

3-Point Hitch:
Category I
iMatch Compatible: Yes
Working Width: 72 In.
Tractor HP: 27 to 55 HP
Tailgate: Fixed
Shipping Weight:
1056 lbs. - (Pair)
Shanks: (5) Replaceable
Shank Type:
3-Position with Holes and 1/2 In. Pin
Scarifier Points:
Replaceable, Hardened Steel
End Plate Thickness: 3/8 In.
Moldboard Thickness: 3/16 In.

Moldboard Type: Formed Back
Mast: Bolt-up with 1/4 In. Plates
Duty: Standard Duty
Cutting Edges:
(2) 1/2 In. x 6 In. Reversible
Assembly/Set up Time:
30 Minutes (Approximate) - Per Pair
Approximate Operating Weight: 494 lbs.
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	]
		BASE MACHINE	
1044XF		BB2072 Standard Duty Box Blade Order in multiples of two.	1,469.00
		OPERATOR'S MANUAL AND DECALS	
9200		French Operator's Manual and Decal Kit (BB20 and BB21 Series)	55.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5WS101371	Miscellaneous French Operator's Manual and Decal Kit (BB20, BB21 and BB20L Series)	57.20

Landscaping

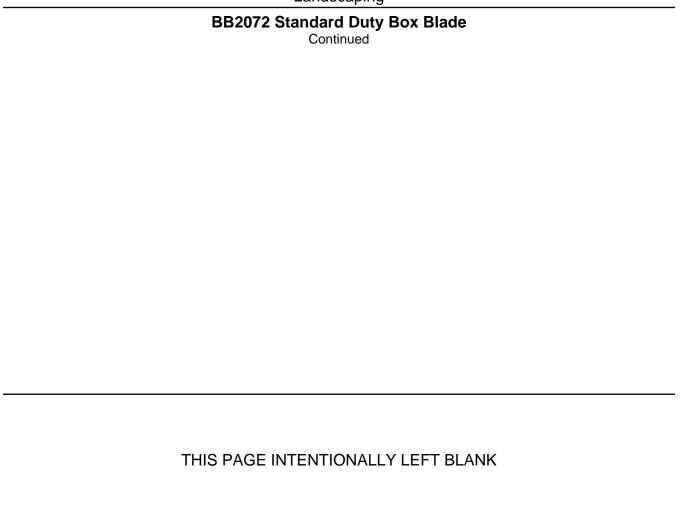

#### Landscaping

#### **BB2172 Medium Duty Box Blade**

**Equipment for Base Machine** 

3-Point Hitch:
Category I
Working Width: 72 In.
Height: 33-1/2 In.
Depth: 31 In.
Capacity:
19 Cubic Foot
Tractor HP: 70 HP Maximum
Tailgate:
Floating/Removable
Shanks:
(6) Replaceable
Beam Size:
4 In. x 4 In. x 1/4 In.
Beam Reinforcement:
1 In. x 3/8 In. Backing Strip
End Plate Thickness:
3/8 In. with a 3/8 In. x 3 In.
Reinforced Bottom Edge

5WS101371

Moldboard Thickness: 3/16 In.
Duty: Medium
Cutting Edges:
(2) 1/2 In. x 6 In. Reversible
Assembly/Set-Up Time:
15 Minutes (Approximate)
Operating Weight:
585 lbs. (Approximate)
Shipping Weight:
675 lbs. (Approximate)
Packaged 1 Per Pallet
Mast: Bolt-up with 3/8 In. Plates
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1064VE		BASE MACHINE  BB3473 Medium Duty Box Blode	1.051.00
1061XF		BB2172 Medium Duty Box Blade	1,951.00
		OPERATOR'S MANUAL AND DECALS	
9200		French Operator's Manual and Decal Kit (BB20 and BB21 Series)	55.00
		ATTACHMENTS FOR FIELD CONVERSION	
		Miscellaneous	

French Operator's Manual and Decal Kit (BB20, BB21 and BB20L Series)

57.20

Landscaping

#### BB2172 Medium Duty Box Blade Continued

THIS	SPA	GF II	NTFN	ITIONAL	IYIFF	T BLANK
	<i>-</i>	$\circ$	<b>1</b>   L   1	4 I I O I 4/ \L		

#### Landscaping

#### **BB2184 Medium Duty Box Blade**

**Equipment for Base Machine** 

3-Point Hitch:
Category I, iMatch Compatible
(Quick-Attach System)
Working Width: 84 In.
Height: 33-1/2 In.
Depth: 31 In.
Capacity: 22.3 Cubic Foot
Tractor HP (Maximum): 70 HP
Tailgate:
Floating/Removable
Shanks: (7) Replaceable
Beam Size: 4 In. x 4 In. x 1/4 In.
Beam Reinforcement:
1 In. x 3/8 In. Backing Strip
End Plate Thickness:
3/8 In. with a 3/8 In. x 3 In.
Reinforced Bottom Edge
Duty: Medium

5WS101371

Moldboard Thickness: 3/16 In.
Cutting Edges:
(2) 1/2 In. x 6 In. Reversible
Assembly/Set-Up Time:
15 Minutes (Approximate)
Operating Weight:
667 lbs. (Approximate)
Shipping Weight:
757 lbs. (Approximate)
Packaged 1 Per Pallet
Mast: Bolt-up with 3/8 In. Plates
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1062XF		BB2184 Medium Duty Box Blade	2,138.00
9200		OPERATOR'S MANUAL AND DECALS French Operator's Manual and Decal Kit (BB20 and BB21 Series)	55.00
		ATTACHMENTS FOR FIELD CONVERSION	
		Miscellaneous	

French Operator's Manual and Decal Kit (BB20, BB21 and BB20L Series)

57.20

#### BB2184 Medium Duty Box Blade Continued

ΤI	ΗІ	S	PA	GE	INT	ΈN	JTI(	ANC	LLY I	LEFT	BLA	١N٨	Κ

#### Landscaping

#### BB4160 - 5 Ft. Hydraulic Scarifier Box Blade - Low Back

**Equipment for Base Machine** 

Tailgate: Hinged, Floating Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility: Category I iMatch Compatible Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: Low Back Hydraulic Opening: Hydraulically Operated Scarifier Bar Hydraulic Kit: Pin Kit And Hydraulic Hose Kit Included Capacity (Cubic Foot): 21.8 Cubic Foot Tractor HP: Up to 50 HP Cutting Edges:
(2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (6) Replaceable Beam Size: Main Beam - 4 In. x 4 In. x 1/4 In. Shank Beam - 4 In.  $\times$  4 In.  $\times$  1/4 In.

Beam Reinforcement:
1/2 In. x 3/4 In. Bar
End Plate Thickness: 3/8 In.
Working Width: 60 In.
Height: 20 In.
Depth: 33 In.
Duty: Medium
Hitch Type:
Category I iMatch Compatible
Mast Design:
Welded 3/8 In. Plate
Assembly/Set-Up Time: 30 Minutes
Operating Weight: 725 lbs.
Shipping Weight: 765 lbs.
Shipping beight: 765 lbs.
Shipping per Crate:
Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 3/16 In.
Manufacturer Model: TB30-60H
Paint Color: Green

			List Price
	Attachment		Suggested
Code	Identifier	Description	USD (\$)

Select One Code From Each Required Category

#### **BASE MACHINE**

1101XF

BB4160 - 5 Ft. Hydraulic Scarifier Box Blade - Low Back Green only

3,526.00

Attachment Information is not available in MOCI for the base code 1101XF

Landscaping

## BB4160 - 5 Ft. Hydraulic Scarifier Box Blade - Low Back Continued

#### . . .

#### Landscaping

#### BB4166 - 5 Ft. 6 In. Hydraulic Scarifier Box Blade - Low Back

**Equipment for Base Machine** 

Tailgate: Hinged, Floating Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility: Category I iMatch Compatible Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: Low Back Hydraulic Opening: Hydraulically Operated Scarifier Bar Hydraulic Kit: Pin Kit and Hydraulic Hose Kit Included Capacity (Cubic Foot):
24 Cubic Foot Tractor HP: Up to 50 HP Cutting Edges:
(2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (6) Replaceable Beam Size: Main Beam - 4 In. x 4 In. x 1/4 In. Shank Beam - 4 In.  $\times$  4 In.  $\times$  1/4 In.

Beam Reinforcement:
1/2 In. x 3/4 In. Bar
End Plate Thickness: 3/8 In.
Working Width: 66 In.
Height: 20 In.
Depth: 33 In.
Duty: Medium
Hitch Type:
Category I iMatch Compatible
Mast Design:
Welded 3/8 In. Plate
Assembly/Set-Up Time: 30 Minutes
Operating Weight: 772 lbs.
Shipping Weight: 812 lbs.
Shipping beight: 812 lbs.
Shipping per Crate:
Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 3/16 In.
Manufacturer Model: TB30-66H
Paint Color: Green

			List Price
	Attachment		Suggested
Code	Identifier	Description	USD (\$)

Select One Code From Each Required Category

#### **BASE MACHINE**

1102XF

BB4166 - 5 Ft. 6 In. Hydraulic Scarifier Box Blade - Low Back

3,643.00

Attachment Information is not available in MOCI for the base code 1102XF

Landscaping

BB4166 - 5 Ft. 6 In.	<b>Hydraulic Scarifier</b>	Box Blade - L	ow Back
	Continued		

#### Landaganing

#### Landscaping

#### BB4172 - 6 Ft. Hydraulic Scarifier Box Blade - Low Back

**Equipment for Base Machine** 

Tailgate: Hinged, Floating Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility: Category I iMatch Compatible Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: Low Back Hydraulic Opening: Hydraulically Operated Scarifier Bar Hydraulic Kit: Pin Kit and Hydraulic Hose Kit Included Capacity (Cubic Foot): 26.2 Cubic Foot Tractor HP: Up to 50 HP Cutting Edges:
(2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (6) Replaceable Beam Size: Main Beam - 4 In. x 4 In. x 1/4 In. Shank Beam - 4 In.  $\times$  4 In.  $\times$  1/4 In.

Beam Reinforcement:
1/2 In. x 3/4 In. Bar
End Plate Thickness: 3/8 In.
Working Width: 72 In.
Height: 20 In.
Depth: 33 In.
Duty: Medium
Hitch Type:
Category I iMatch Compatible
Mast Design:
Welded 3/8 In. Plate
Assembly/Set-Up Time: 30 Minutes
Operating Weight: 815 lbs.
Shipping Weight: 855 lbs.
Shipping per Crate:
Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 3/16 In.
Manufacturer Model: TB30-72H
Paint Color: Green

			List Price
	Attachment		Suggested
Code	Identifier	Description	USD (\$)

Select One Code From Each Required Category

#### **BASE MACHINE**

1103XF

BB4172 - 6 Ft. Hydraulic Scarifier Box Blade - Low Back

3,692.00

Attachment Information is not available in MOCI for the base code 1103XF

Landscaping

BB4172 - 6 Ft. Hydraulic Scarifier Box Blade - Low Back	
Continued	
THE DAGE INTENTIONALLY LEFT DIANIC	
THIS PAGE INTENTIONALLY LEFT BLANK	

#### -KONTIEK PRODUC

#### Landscaping

#### BB4178 - 6 Ft. 6 In. Hydraulic Scarifier Box Blade - Low Back

**Equipment for Base Machine** 

Tailgate:
Hinged, Floating Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility: Category I and II, iMatch and Quick Coupler Compatible Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: Low Back Hydraulic Opening: Hydraulically Operated Scarifier Bar Hydraulic Kit:
Pin Kit and Hydraulic Hose Kit Included
Capacity (Cubic Foot):
28.3 Cubic Foot Tractor HP: Up to 90 HP Cutting Edges: (2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (8) Replaceable Beam Size: Main Beam - 4 In.  $\times$  4 In.  $\times$  1/4 In. Shank Beam - 4 In.  $\times$  4 In.  $\times$  1/4 In.

Beam Reinforcement:
1/2 In. x 3/4 In. Bar
End Plate Thickness: 1/2 In.
Working Width: 78 In.
Height: 20 In.
Depth: 33 In.
Duty: Heavy
Hitch Type:
Category I and II, iMatch and
Quick Coupler Compatible
Mast Design:
Welded 1/2 In. Plate
Assembly/Set-Up Time: 30 Minutes
Operating Weight: 1016 lbs.
Shipping Weight: 1056 lbs.
Shipping per Crate:
Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 1/4 In.
Manufacturer Model: TB30-78H
Paint Color:
Construction Yellow (Optional Green)

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1104XF		BB4178 - 6 Ft. 6 In. Hydraulic Scarifier Box Blade - Low Back	4,202.00
		COLOR	
1000		Green	In Base Price

Attachment Information is not available in MOCI for the base code 1104XF

Landscaping

### BB4178 - 6 Ft. 6 In. Hydraulic Scarifier Box Blade - Low Back Continued

#### Landscaping

#### BB4184 - 7 Ft. Hydraulic Scarifier Box Blade - Low Back

**Equipment for Base Machine** 

Tailgate:
Hinged, Floating Grading and Leveling: Fine, Precision Grading And Leveling Tractor Compatibility: Category I and II, iMatch and Quick Coupler Compatible Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: Low Back Hydraulic Opening: Hydraulically Operated Scarifier Bar Hydraulic Kit:
Pin Kit and Hydraulic Hose Kit Included
Capacity (Cubic Foot):
30.5 Cubic Foot Tractor HP: Up to 90 HP Cutting Edges: (2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (8) Replaceable Beam Size: Main Beam - 4 In.  $\times$  4 In.  $\times$  1/4 In. Shank Beam - 4 In.  $\times$  4 In.  $\times$  1/4 In.

Beam Reinforcement:
1/2 In. x 3/4 In. Bar
End Plate Thickness: 1/2 In.
Working Width: 84 In.
Height: 20 In.
Depth: 33 In.
Duty: Heavy
Hitch Type:
Category I and II, iMatch and
Quick Coupler Compatible
Mast Design:
Welded 1/2 In. Plate
Assembly/Set-Up Time: 30 Minutes
Operating Weight: 1052 lbs.
Shipping Weight: 1092 lbs.
Shipping per Crate:
Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 1/4 In.
Manufacturer Model: TB30-84H
Paint Color:
Construction Yellow (Optional Green)

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1105XF		BB4184 - 7 Ft. Hydraulic Scarifier Box Blade - Low Back	4,371.00
1105XF			4,371.00
1105XF 1000		BB4184 - 7 Ft. Hydraulic Scarifier Box Blade - Low Back	4,371.00 In Base Price

Attachment Information is not available in MOCI for the base code 1105XF

Landscaping

## BB4184 - 7 Ft. Hydraulic Scarifier Box Blade - Low Back Continued

#### Landscaping

#### BB4196 - 8 Ft. Hydraulic Scarifier Box Blade - Low Back

**Equipment for Base Machine** 

Tailgate:
Hinged, Floating Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility: Category I and II, iMatch and Quick Coupler Compatible Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: Low Back Hydraulic Opening: Hydraulically Operated Scarifier Bar Hydraulic Kit:
Pin Kit and Hydraulic Hose Kit Included
Capacity (Cubic Foot):
34.9 Cubic Foot Tractor HP: Up to 90 HP Cutting Edges: (2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (8) Replaceable Beam Size: Main Beam - 4 In.  $\times$  4 In.  $\times$  1/4 In. Shank Beam - 4 In.  $\times$  4 In.  $\times$  1/4 In.

Beam Reinforcement:
1/2 In. x 3/4 In. Bar
End Plate Thickness: 1/2 In.
Working Width: 96 In.
Height: 20 In.
Depth: 33 In.
Duty: Heavy
Hitch Type:
Category I and II, iMatch and
Quick Coupler Compatible
Mast Design:
Welded 1/2 In. Plate
Assembly/Set-Up Time: 30 Minutes
Operating Weight: 1186 lbs.
Shipping Weight: 1186 lbs.
Shipping ber Crate:
Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 1/4 In.
Manufacturer Model: TB30-96H
Paint Color:
Construction Yellow (Optional Green)

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	]
		BASE MACHINE	
1106XF		BB4196 - 8 Ft. Hydraulic Scarifier Box Blade - Low Back	4,515.00
		COLOR	
1000		Green	In Base Price

Attachment Information is not available in MOCI for the base code 1106XF

Landscaping

## BB4196 - 8 Ft. Hydraulic Scarifier Box Blade - Low Back Continued

#### Landscaping

#### BB4278H - 6 Ft. 6 In. Hydraulic Scarifier Box Blade - High Back

**Equipment for Base Machine** 

Tailgate: Hinged, Floating Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility: Category I and II, iMatch and Quick Coupler Compatible Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: High Back Hydraulic Opening: Hydraulically Operated Scarifier Bar Hydraulic Kit:
Pin Kit and Hydraulic Hose Kit Included
Capacity (Cubic Foot):
32 Cubic Foot Tractor HP: Up to 90 HP Cutting Edges: (2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (8) Replaceable Beam Size: Main Beam - 5 In. x 5 In. x 1/4 In. Shank Beam - 5 In. x 5 In. x 1/4 In. Beam Reinforcement:

1/2 In. x 1 In. Bar
End Plate Thickness: 1/2 In.
Working Width: 78 In.
Height:
20 In. Front, 26 In. Rear
Depth: 33 In.
Duty: Heavy
Hitch Type:
Category I and II, iMatch and
Quick Coupler Compatible
Mast Design:
Welded 1/2 In. Plate
Assembly/Set-Up Time: 30 Minutes
Operating Weight: 1160 lbs.
Shipping Weight: 1200 lbs.
Shipping per Crate:
Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 1/4 In.
Manufacturer Model: TB40-78H
Paint Color:
Construction Yellow (Optional Green)

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	]
		BASE MACHINE	
1111XF		BB4278H - 6 Ft. 6 In. Hydraulic Scarifier Box Blade - High Back	4,468.00
		COLOR	
1000		Green	In Base Price
.000			

Attachment Information is not available in MOCI for the base code 1111XF

Landscaping

BB4278H - 6 Ft. 6 In. Hydraulic Scarifier Box Blade - High Back
Continued

#### Landscaping

#### BB4284H - 7 Ft. Hydraulic Scarifier Box Blade - High Back

**Equipment for Base Machine** 

Tailgate:
Hinged, Floating Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility: Category I and II, iMatch and Quick Coupler Compatible Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: High Back Hydraulic Opening: Hydraulically Operated Scarifier Bar Hydraulic Kit:
Pin Kit and Hydraulic Hose Kit Included
Capacity (Cubic Foot):
34.5 Cubic Foot Tractor HP: Up to 90 HP Cutting Edges: (2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (8) Replaceable Beam Size: Main Beam - 5 In. x 5 In. x 1/4 In. Shank Beam - 5 In. x 5 In. x 1/4 In. Beam Reinforcement:

1/2 In. x 1 In. Bar
End Plate Thickness: 1/2 In.
Working Width: 84 In.
Height:
20 In. Front, 26 In. Rear
Depth: 33 In.
Duty: Heavy
Hitch Type:
Category I and II, iMatch and
Quick Coupler Compatible
Mast Design:
Welded 1/2 In. Plate
Assembly/Set-Up Time: 30 Minutes
Operating Weight: 1200 lbs.
Shipping Weight: 1240 lbs.
Shipping weight: 1240 lbs.
Shipping per Crate:
Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 1/4 In.
Manufacturer Model: TB40-84H
Paint Color:
Construction Yellow (Optional Green)

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	1
		BASE MACHINE	_
1112XF		BB4284H - 7 Ft. Hydraulic Scarifier Box Blade - High Back	4,541.00
		COLOR	
1000		Green	In Base Price
1010		Construction Yellow	No Added Cost

Attachment Information is not available in MOCI for the base code 1112XF

Landscaping

# BB4284H - 7 Ft. Hydraulic Scarifier Box Blade - High Back Continued

#### Landscaping

#### BB4296H - 8 Ft. Hydraulic Scarifier Box Blade - High Back

**Equipment for Base Machine** 

Tailgate:
Hinged, Floating Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility: Category I and II, iMatch and Quick Coupler Compatible Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: High Back Hydraulic Opening: Hydraulically Operated Scarifier Bar Hydraulic Kit:
Pin Kit and Hydraulic Hose Kit Included
Capacity (Cubic Foot):
39.4 Cubic Foot Tractor HP: Up to 90 HP Cutting Edges: (2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (8) Replaceable Beam Size: Main Beam - 5 In. x 5 In. x 1/4 In. Shank Beam - 5 In. x 5 In. x 1/4 In. Beam Reinforcement:

1/2 In. x 1 In. Bar
End Plate Thickness: 1/2 In.
Working Width: 96 In.
Height:
20 In. Front, 26 In. Rear
Depth: 33 In.
Duty: Heavy
Hitch Type:
Category I and II, iMatch and
Quick Coupler Compatible
Mast Design:
Welded 1/2 In. Plate
Assembly/Set-Up Time: 30 Minutes
Operating Weight: 1310 lbs.
Shipping Weight: 1350 lbs.
Shipping per Crate:
Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 1/4 In.
Manufacturer Model: TB4096H
Paint Color:
Construction Yellow (Optional Green)

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	]
1113XF		BASE MACHINE  BB4296H - 8 Ft. Hydraulic Scarifier Box Blade - High Back	4,855.00
TTIONE		COLOR	4,655.00
1000		Green	In Base Price

Attachment Information is not available in MOCI for the base code 1113XF

Landscaping

## BB4296H - 8 Ft. Hydraulic Scarifier Box Blade - High Back Continued

#### Landscaping

#### **BB3272 BOX BLADE W/SCARIFIER**

**Equipment for Base Machine** 

Tailgate: Hinged Tailgate Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility: Balanced Design Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: High Capacity Box, No Gussets or Obstructions Hydraulic Opening: NA Hydraulic Kit: NA Capacity (Cubic Foot): 21 Cubic Foot Tractor HP: 80 HP Maximum Cutting Edges:
(2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (7) Replaceable Beam Size:

4 In.  $\times$  4 In.  $\times$  3/8 In.

Beam Reinforcement: Yes
End Plate Thickness: 1/2 In.
Working Width: 72 In.
Height: 20 In.
Depth: 26-1/2 In.
Duty: Construction Grade
Hitch Type:
Category I and Category II
Quick Hitch Compatible
Mast Design: Welded
Assembly/Set-Up Time: 15 Minutes
Operating Weight: 790 lbs.
Shipping Weight: 830 lbs.
Shipping Weight: 830 lbs.
Shipping per Crate:
Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 1/4 In.
Manufacturer Model: New
Paint Color: Construction Yellow

			List Price
	Attachment		Suggested
Code	Identifier	Description	USD (\$)

Select One Code From Each Required Category

#### **BASE MACHINE**

1081XF BB3272 BOX BLADE W/SCARIFIER Construction yellow.

2,557.00

Attachment Information is not available in MOCI for the base code 1081XF

Landscaping

BB3272 BOX BLADE W/SCARIFIER Continued
THIS PAGE INTENTIONALLY LEFT BLANK

#### Londonning

#### Landscaping

#### **BB3284 BOX BLADE W/SCARIFIER**

Equipment for Base Machine

Tailgate: Hinged Tailgate Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility: Balanced Design Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: High Capacity Box, No Gussets or Obstructions Hydraulic Opening: NA Hydraulic Kit: NA Capacity (Cubic Foot): 24.50 Cubic Foot Tractor HP: 80 HP Maximum Cutting Edges:
(2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (8) Replaceable Beam Size: 4 In. x 4 In. x 3/8 In.

Beam Reinforcement: Yes
End Plate Thickness: 1/2 In.
Working Width: 84 In.
Height: 20 In.
Depth: 26-1/2 In.
Duty: Construction Grade
Hitch Type:
Category I and Category II
Quick Hitch Compatible
Mast Design: Welded
Assembly/Set-Up Time: 15 Minutes
Operating Weight: 885 lbs.
Shipping Weight: 925 lbs.
Shipping weight: 925 lbs.
Shipping per Crate:
Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 1/4 In.
Manufacturer Model: New
Paint Color: Construction Yellow

			List Price
	Attachment		Suggested
Code	Identifier	Description	USD (\$)

Select One Code From Each Required Category

#### **BASE MACHINE**

1082XF BB3284 BOX BLADE W/SCARIFIER

Construction yellow.

2,805.00

Attachment Information is not available in MOCI for the base code 1082XF

#### BB3284 BOX BLADE W/SCARIFIER Continued

THIS PAGE INTENTIONALLY LEFT BLANK

#### RONTIER FRODU

#### Landscaping

#### **BB3296 BOX BLADE W/SCARIFIER**

**Equipment for Base Machine** 

Tailgate: Hinged Tailgate Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility: Balanced Design Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: High Capacity Box, No Gussets or Obstructions Hydraulic Opening: NA Hydraulic Kit: NA Capacity (Cubic Foot): 28 Cubic Foot Tractor HP: 80 HP Maximum Cutting Edges:
(2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (9) Replaceable Beam Size:

4 In.  $\times$  4 In.  $\times$  3/8 In.

Beam Reinforcement: Yes
End Plate Thickness: 1/2 In.
Working Width: 96 In.
Height: 20 In.
Depth: 26-1/2 In.
Duty: Construction Grade
Hitch Type:
Category I and Category II
Quick Hitch Compatible
Mast Design: Welded
Assembly/Set-Up Time: 15 Minutes
Operating Weight: 1010 lbs.
Shipping Weight: 1050 lbs.
Shipping Weight: Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 1/4 In.
Manufacturer Model: New
Paint Color: Construction Yellow

			List Price
Α	ttachment		Suggested
Code Id	dentifier D	escription	USD (\$)

Select One Code From Each Required Category

#### **BASE MACHINE**

1083XF

BB3296 BOX BLADE W/SCARIFIER Construction yellow.

3,103.00

Attachment Information is not available in MOCI for the base code 1083XF

Landscaping

BB3296 BOX BLADE W/SCARIFIER Continued	_

THIS PAGE INTENTIONALLY LEFT BLANK

#### Landscaping

#### **BB5060 Standard Duty Box Blade**

**Equipment for Base Machine** 

3-Point Hitch:
Category I
iMatch Compatible: Yes
Working Width: 61.5 In.
Tractor HP: 56 PTO HP max;
see compatibility charts for
specific model of tractors
Tailgate: Fixed
Shipping Weight:
894 lbs. - (Pair)
Shanks: (5) Replaceable
Shank Type:
3-Position with Holes and 1/2 In. Pin
Scarifier Points:
Hardened Steel
End Plate Thickness: 3/8 In.

Moldboard Thickness: 3/16 In.
Moldboard Type: Formed Back
Mast: Welded
Duty: Standard Duty
Cutting Edges:
(2) 3/8 In. x 6 In. Reversible
Assembly/Set-Up Time:
15 Minutes (Approximate) - Per Pair
Approximate Operating Weight: 418 lbs.
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1641XF		BASE MACHINE  BB5060 Standard Duty Box Blade  Order in multiples of two.  Product not available for Quebec	1,140.00

Attachment Information is not available in MOCI for the base code 1641XF

# Landscaping

**BB5060 Standard Duty Box Blade** 

Continued

THIS PAGE INTENTIONALLY LEFT BLANK

#### Landscaping

#### **BB5072 Standard Duty Box Blade**

**Equipment for Base Machine** 

3-Point Hitch:
Category I
iMatch Compatible: Yes
Working Width: 73.5 In.
Tractor HP: 56 PTO HP max;
see compatibility charts for
specific model of tractors
Tailgate: Fixed
Shipping Weight:
1,006 lbs. - (Pair)
Shanks: (6) Replaceable
Shank Type:
3-Position with Holes and 1/2 In. Pin
Scarifier Points:
Hardened Steel
End Plate Thickness: 3/8 In.

Moldboard Thickness: 3/16 In.
Moldboard Type: Formed Back
Mast: Welded
Duty: Standard Duty
Cutting Edges:
(2) 3/8 In. x 6 In. Reversible
Assembly/Set-Up Time:
15 Minutes (Approximate) - Per Pair
Approximate Operating Weight: 474 lbs.
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1642XF		BB5072 Standard Duty Box Blade Order in multiples of two. Product not available for Quebec	1,319.00

Attachment Information is not available in MOCI for the base code 1642XF

#### Grounds Equipment - Bid #ESCNJ 18/19-25

# FRONTIER PRODUCTS Landscaping

### BB5072 Standard Duty Box Blade Continued

#### Landscaping

#### **BB5084 Standard Duty Box Blade**

**Equipment for Base Machine** 

3-Point Hitch:
Category I
iMatch Compatible: Yes
Working Width: 88.5 In.
Tractor HP: 56 PTO HP max;
see compatibility charts for
specific model of tractors
Tailgate: Fixed
Shipping Weight:
1,078 lbs. - (Pair)
Shanks: (6) Replaceable
Shank Type:
3-Position with Holes and 1/2 In. Pin
Scarifier Points:
Hardened Steel
End Plate Thickness: 3/8 In.

Moldboard Thickness: 3/16 In.
Moldboard Type: Formed Back
Mast: Welded
Duty: Standard Duty
Cutting Edges:
(2) 3/8 In. x 6 In. Reversible
Assembly/Set-Up Time:
15 Minutes (Approximate) - Per Pair
Approximate Operating Weight: 510 lbs.
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1643XF		BB5084 Standard Duty Box Blade Order in multiples of two. Product not available for Quebec	1,507.00

Attachment Information is not available in MOCI for the base code 1643XF

#### Grounds Equipment - Bid #ESCNJ 18/19-25

Landscaping

#### BB5084 Standard Duty Box Blade Continued

THIS PAGE INTENTIONALLY LEFT BLANK

#### Landscaping

#### **BB5096 Standard Duty Box Blade**

**Equipment for Base Machine** 

3-Point Hitch:
Category I
iMatch Compatible: Yes
Working Width: 97.5 In.
Tractor HP: 56 PTO HP max;
see compatibility charts for
specific model of tractors
Tailgate: Fixed
Shipping Weight:
1,262 lbs. - (Pair)
Shanks: (7) Replaceable
Shank Type:
3-Position with Holes and 1/2 In. Pin
Scarifier Points:
Hardened Steel
End Plate Thickness: 3/8 In.

Moldboard Thickness: 3/16 In.
Moldboard Type: Formed Back
Mast: Welded
Duty: Standard Duty
Cutting Edges:
(2) 3/8 In. x 6 In. Reversible
Assembly/Set-Up Time:
15 Minutes (Approximate) - Per Pair
Approximate Operating Weight: 602 lbs.
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1644XF		BB5096 Standard Duty Box Blade Order in multiples of two. Product not available for Quebec	1,686.00

Attachment Information is not available in MOCI for the base code 1644XF

#### BB5096 Standard Duty Box Blade Continued

THIS PAGE INTENTIONALLY LEFT BLANK

26 March	2021	US &	Canada

#### Landscaping

#### **BB5048L Limited Category 1 Economy Duty Box Blade**

**Equipment for Base Machine** 

3-Point Hitch:
Limited Category I
iMatch Compatible: Yes
Working Width: 50 In.
Tractor HP: 18 PTO HP max;
see compatibility charts for
specific model of tractors
Tailgate: Fixed
Shipping Weight:
778 lbs. - (Pair)
Shanks: (5) Replaceable
Shank Type:
3-Position with Holes and 1/2 In. Pin
Scarifier Points:
Hardened Steel
End Plate Thickness: 5/16 In.

Moldboard Thickness: 3/16 In.
Moldboard Type: Formed Back
Mast: Bolt On
Duty: Economy Duty
Cutting Edges:
(2) 3/8 In. x 6 In. Reversible
Assembly/Set-Up Time:
15 Minutes (Approximate) - Per Pair
Approximate Operating Weight: 360 lbs.
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1741XF		BB5048L Limited Category 1 Economy Duty Box Blade Order in multiples of two. Product not available for Quebec	966.00

Attachment Information is not available in MOCI for the base code 1741XF

Landscaping

BB5048L Limited Category 1 Economy Duty Box Blade Continued	_
	_
THIS PAGE INTENTIONALLY LEFT BLANK	

#### Landscaping

#### **BB5060L Limited Category 1 Economy Duty Box Blade**

**Equipment for Base Machine** 

3-Point Hitch:
Limited Category I
iMatch Compatible: Yes
Working Width: 62 In.
Tractor HP: 18 PTO HP max;
see compatibility charts for
specific model of tractors
Tailgate: Fixed
Shipping Weight:
868 lbs. - (Pair)
Shanks: (5) Replaceable
Shank Type:
3-Position with Holes and 1/2 In. Pin
Scarifier Points:
Hardened Steel
End Plate Thickness: 5/16 In.

Moldboard Thickness: 3/16 In.
Moldboard Type: Formed Back
Mast: Bolt On
Duty: Economy Duty
Cutting Edges:
(2) 3/8 In. x 6 In. Reversible
Assembly/Set-Up Time:
15 Minutes (Approximate) - Per Pair
Approximate Operating Weight: 405 lbs.
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1742XF		BB5060L Limited Category 1 Economy Duty Box Blade Order in multiples of two. Product not available for Quebec	1,063.00

Attachment Information is not available in MOCI for the base code 1742XF

Landscaping

BB5060L Limited Category 1 Economy Duty Box Blade Continued
THIS PAGE INTENTIONALLY LEFT BLANK

#### Landscaping

#### LL1160 - 5 Ft. Drawn Box Scraper

**Equipment for Base Machine** 

Working Width: 60 In.
Machine Width: 61 In.
Machine Length: 98 In.
Machine Height: 29.5 In.
Approximate Operating Weight: 612 lbs.
Tractor HP (Maximum): 20 to 50 HP
Tailgate: Fixed
Shanks: 6 (Replaceable)
End Plate Thickness: 3/8 In.
Single Hydraulic Cylinder:
3 In. Bore x 8 In. Stroke
Tires (2): Pneumatic
Wheels (2):
6 In. Wide x 10 In. Diameter

Cutting Edge:
5/8 In. Thick x 6 In. Tall
Safety Chains: Yes - Required
Color: Construction Yellow
Assembly/Set-Up Time:
15 Minutes (Approximate)
Duty: Standard Duty
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1471XF		BASE MACHINE  11 1160 - 5 Ft. Drawn Box Scraper	4 482 00

Attachment Information is not available in MOCI for the base code 1471XF

Landscaping

#### LL1160 - 5 Ft. Drawn Box Scraper Continued

THIS	SPA	GF II	NTFN	ITIONAL	IYIFF	T BLANK
	<i>-</i>	$\circ$	<b>1</b>   L   1	4 I I O I 4/ \L		

#### Landscaping

#### LL1172 - 6 Ft. Drawn Box Scraper

**Equipment for Base Machine** 

Working Width: 72 In.
Machine Width: 73 In.
Machine Length: 98 In.
Machine Height: 29.5 In.
Approximate Operating Weight: 735 lbs.
Tractor HP (Maximum): 20 to 50 HP
Tailgate: Fixed
Shanks: 6 (Replaceable)
End Plate Thickness: 3/8 In.
Single Hydraulic Cylinder:
3 In. Bore x 8 In. Stroke
Tires (2): Pneumatic
Wheels (2):
6 In. Wide x 10 In. Diameter

Cutting Edge:
5/8 In. Thick x 6 In. Tall
Safety Chains: Yes - Required
Color: Construction Yellow
Assembly/Set-Up Time:
15 Minutes (Approximate)
Duty: Standard Duty
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1472XF		BASE MACHINE LL1172 - 6 Et. Drawn Box Scraper	4 687 00

Attachment Information is not available in MOCI for the base code 1472XF

Landscaping

# LL1172 - 6 Ft. Drawn Box Scraper Continued THIS PAGE INTENTIONALLY LEFT BLANK

#### Landscaping

#### LL1208 - 8 Ft. Drawn Box Scraper

**Equipment for Base Machine** 

Working Width: 96 In.
Machine Width: 96.3 In.
Machine Length: 144 In.
Machine Height: 36 In.
Approximate Operating Weight: 1500 lbs.
Tractor HP (Maximum): 35 to 100 HP
Tailgate: Fixed
Lift Axle: Standard Lift Rockshaft
End Plate Thickness: 3/8 In.
Hydraulic Lift Cylinder:
3 In. Bore x 8 In. Stroke
Tires (2): Pneumatic -9.5L15 Implement Tires
Wheels (2):
8 In. Wide x 15 In. Diameter

Cutting Edge:
5/8 In. Thick x 6 In. Tall
Safety Chains: Yes - Required
Color: Construction Yellow
Assembly/Set-Up Time:
60 Minutes (Approximate)
Duty: Standard Duty
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1541XF		LL1208 - 8 Ft. Drawn Box Scraper Hydraulic tilt axle, 9.5L-15 wheels and tires, lift cylinder, hydraulic hoses, and SCV connectors are in base equipment.	7,508.00
		AXLE SETTING AND TREAD ADJUST	
1060		Tilt Axle with Cylinder	No Added Cost
1065		Less Tilt Axle with Cylinder	-945.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5DDA00100	Miscellaneous 9.5L-15 Tires on 6-Bolt Rims (2)	965.80
	5DDA00096	LL12 Series - Lift Cylinder Kit	697.40
	5DDA00098	LL12 Series - Tilt Cylinder Kit	729.31
	5DDA00097	LL12 Series - Turnbuckle	235.40
	5DDA00094	Tilt Axle with Cylinder (LL1208 and LL1210)	1,786.40

#### Grounds Equipment - Bid #ESCNJ 18/19-25

## FRONTIER PRODUCTS Landscaping

#### LL1208 - 8 Ft. Drawn Box Scraper Continued

	TΗ	IS P	AGE	INTE	NTIOI	NALLY	LEFT	BLAN
--	----	------	-----	------	-------	-------	------	------

#### Landscaping

#### LL1210 - 10 Ft. Drawn Box Scraper

**Equipment for Base Machine** 

Working Width: 120 In.
Machine Width: 120.3 In.
Machine Length: 144 In.
Machine Height: 36 In.
Approximate Operating Weight: 1600 lbs.
Tractor HP (Maximum): 35 to 125 HP
Tailgate: Fixed
Lift Axle: Standard Lift Rockshaft
End Plate Thickness: 3/8 In.
Hydraulic Lift Cylinder:
3 In. Bore x 8 In. Stroke
Tires (2): Pneumatic -9.5L15 Implement Tires
Wheels (2):
8 In. Wide x 15 In. Diameter

Cutting Edge:
5/8 In. Thick x 6 In. Tall
Safety Chains: Yes - Required
Color: Construction Yellow
Assembly/Set-Up Time:
60 Minutes (Approximate)
Duty: Standard Duty
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1542XF		LL1210 - 10 Ft. Drawn Box Scraper Hydraulic tilt axle, 9.5L-15 wheels and tires, lift cylinder, hydraulic hoses, and SCV connectors are in base equipment.	8,034.00
		AXLE SETTING AND TREAD ADJUST	
1060		Tilt Axle with Cylinder	No Added Cost
1065		Less Tilt Axle with Cylinder	-945.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5DDA00100	Miscellaneous 9.5L-15 Tires on 6-Bolt Rims (2)	965.80
	5DDA00096	LL12 Series - Lift Cylinder Kit	697.40
	5DDA00098	LL12 Series - Tilt Cylinder Kit	729.31
	5DDA00098 5DDA00097	LL12 Series - Tilt Cylinder Kit  LL12 Series - Turnbuckle	729.31 235.40

Landscaping

LL1210 - 10 Ft. Drawn Box Scraper	
Continued	
THIS PAGE INTENTIONALLY LEFT BLANK	
THIS PAGE INTENTIONALLT LEFT DLAIN	

#### Landscaping

#### LL1212 - 12 Ft. Drawn Box Scraper

**Equipment for Base Machine** 

Working Width: 144 In.
Machine Width: 143 In.
Machine Length: 144 In.
Machine Height: 36 In.
Approximate Operating Weight: 1700 lbs.
Tractor HP (Maximum): 35 to 125 HP
Tailgate: Fixed
Lift Axle: Standard Lift Rockshaft
End Plate Thickness: 3/8 In.
Hydraulic Lift Cylinder:
3 In. Bore x 8 In. Stroke
Tires (2): Pneumatic -9.5L15 Implement Tires
Wheels (2):
8 In. Wide x 15 In. Diameter

Cutting Edge:
5/8 In. Thick x 6 In. Tall
Safety Chains: Yes - Required
Color: Construction Yellow
Assembly/Set-Up Time:
60 Minutes (Approximate)
Duty: Standard Duty
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1543XF		LL1212 - 12 Ft. Drawn Box Scraper Hydraulic tilt axle, 9.5L-15 wheels and tires, lift cylinder, hydraulic hoses, and SCV connectors are in base equipment.	8,226.00
		AXLE SETTING AND TREAD ADJUST	
1060		Tilt Axle with Cylinder	No Added Cost
1065		Less Tilt Axle with Cylinder	-973.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5DDA00100	Miscellaneous 9.5L-15 Tires on 6-Bolt Rims (2)	965.80
	5DDA00096	LL12 Series - Lift Cylinder Kit	697.40
	5DDA00098	LL12 Series - Tilt Cylinder Kit	729.31
	5DDA00097	LL12 Series - Turnbuckle	235.40
	5DDA00095	Tilt Axle with Cylinder (LL1212)	1,834.80

#### Landscaping

# LL1212 - 12 Ft. Drawn Box Scraper Continued

#### THIS PAGE INTENTIONALLY LEFT BLANK

#### Landscaping

#### LL1372 - 6 Ft. Drawn Box Scraper

**Equipment for Base Machine** 

Working Width: 72 In.
Machine Width: 74 In.
Machine Length: 165 In.
Machine Height: 49 In.
Approximate Operating Weight: 1600 lbs.
Tractor HP (Maximum): 35 to 100
Tailgate: Fixed
End Plate Thickness: 1/2 In.
Dual Hydraulic Cylinders: 3 In. Bore x
8 In. Stroke (1 Rear SCV Required)
Tires (4): Pneumatic
Wheels (4):
6 In. Wide x 10 In. Diameter
Cutting Edge:

Cutting Edge:

5/8 In. Thick x 6 In. Tall

Safety Chains: Yes - Required Color: Construction Yellow Assembly/Set-Up Time:
30 Minutes (Approximate)
Shipping Configuration: 2 Pieces (Box Blade and Tongue) Duty: Medium Duty

Warranty: 6 Months

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1481XF		LL1372 - 6 Ft. Drawn Box Scraper	8,621.00
		SCARIFIER BAR	
1000		Scarifier Bar Attachment	2,468.00
1095		Less Scarifier Bar Attachment	In Base Price
		REAR SMOOTH ROLLER	
2000		Rear Smooth 12 In. Drum Roller Attachment	2,962.00
2095		Less Rear Smooth Roller	In Base Price
		REAR BASKET ROLLER PULVERIZER	
9030		Double Rear 12 In. Diameter Basket Roller	2,963.00
		HITCHES	
9000		Rear Hitch Assembly	246.00
		HARROW TYPE	
9040		3 Bar Spring Tine Harrow	2,346.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5DDA00020	Miscellaneous 3 Bar Spring Tine Harrow - 6 Ft.	2,580.60
	5DDA00017	Double Rear 12 In. Diameter Basket Roller Pulverizer - 6 Ft.	3,259.31
	5DDA00007	Rear Hitch Assembly (LL13 Series)	270.60

#### Landscaping

#### LL1372 - 6 Ft. Drawn Box Scraper

Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
	5DDA00023	ATTACHMENTS FOR FIELD CONVERSIONContinued Rear Smooth 12 In. Drum Roller Attachment - 6 Ft.	3,476.00
	5DDA00029	Scarifier Bar Attachment - 6 Ft.	2,896.31

#### Landscaping

#### LL1384 - 7 Ft. Drawn Box Scraper

**Equipment for Base Machine** 

Working Width: 84 In.
Machine Width: 86 In.
Machine Length: 165 In.
Machine Height: 49 In.
Approximate Operating Weight: 1866 lbs.
Tractor HP (Maximum): 35 to 125 HP
Tailgate: Fixed
End Plate Thickness: 1/2 In.
Dual Hydraulic Cylinders: 3 In. Bore x
8 In. Stroke (1 Rear SCV Required)
Tires (4): Pneumatic
Wheels (4):
6 In. Wide x 10 In. Diameter
Cutting Edge:

Cutting Edge:

5/8 In. Thick x 6 In. Tall

Safety Chains: Yes - Required Color: Construction Yellow Assembly/Set-Up Time:
30 Minutes (Approximate)
Shipping Configuration: 2 Pieces (Box Blade and Tongue) Duty: Medium Duty

Warranty: 6 Months

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1482XF		LL1384 - 7 Ft. Drawn Box Scraper	8,755.00
		SCARIFIER BAR	
1000		Scarifier Bar Attachment	2,468.00
1095		Less Scarifier Bar Attachment	In Base Price
		REAR SMOOTH ROLLER	
2000		Rear Smooth 12 In. Drum Roller Attachment	3,129.00
2095		Less Rear Smooth Roller	In Base Price
9030		REAR BASKET ROLLER PULVERIZER  Double Rear 12 In. Diameter Basket Roller	3,126.00
9000		HITCHES Rear Hitch Assembly	246.00
9040		HARROW TYPE 3 Bar Spring Tine Harrow	2,549.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5DDA00021	Miscellaneous 3 Bar Spring Tine Harrow - 7 Ft.	2,803.91
	5DDA00018	Double Rear 12 In. Diameter Basket Roller Pulverizer - 7 Ft.	3,438.60
	5DDA00007	Rear Hitch Assembly (LL13 Series)	270.60

#### Landscaping

#### LL1384 - 7 Ft. Drawn Box Scraper

Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
	5DDA00024	ATTACHMENTS FOR FIELD CONVERSIONContinued Rear Smooth 12 In. Drum Roller Attachment - 7 Ft.	3,670.71
	5DDA00029	Scarifier Bar Attachment - 6 Ft.	2,896.31

#### Landscaping

#### LL1396 - 8 Ft. Drawn Box Scraper

**Equipment for Base Machine** 

Working Width: 96 In.
Machine Width: 98 In.
Machine Length: 165 In.
Machine Height: 49 In.
Approximate Operating Weight: 2133 lbs.
Tractor HP (Maximum): 35 to 125 HP
Tailgate: Fixed
End Plate Thickness: 1/2 In.
Dual Hydraulic Cylinders: 3 In. Bore x
8 In. Stroke (1 Rear SCV Required)
Tires (4): Pneumatic
Wheels (4):
6 In. Wide x 10 In. Diameter
Cutting Edge:

Cutting Edge:

5/8 In. Thick x 6 In. Tall

Safety Chains: Yes - Required Color: Construction Yellow Assembly/Set-Up Time:
30 Minutes (Approximate)
Shipping Configuration:

2 Pieces (Box Blade and Tongue) Duty: Medium Duty

Warranty: 6 Months

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1483XF		LL1396 - 8 Ft. Drawn Box Scraper	9,130.00
		SCARIFIER BAR	
1000		Scarifier Bar Attachment	2,387.00
1095		Less Scarifier Bar Attachment	In Base Price
		REAR SMOOTH ROLLER	
2000		Rear Smooth 12 In. Drum Roller Attachment	3,374.00
2095		Less Rear Smooth Roller	In Base Price
		REAR BASKET ROLLER PULVERIZER	
9030		Double Rear 12 In. Diameter Basket Roller	3,293.00
		HITCHES	
9000		Rear Hitch Assembly	246.00
		HARROW TYPE	
9040		3 Bar Spring Tine Harrow	2,741.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5DDA00022	Miscellaneous 3 Bar Spring Tine Harrow - 8 Ft.	3,014.00
	5DDA00019	Double Rear 12 In. Diameter Basket Roller Pulverizer - 8 Ft.	3,622.31
	5DDA00007	Rear Hitch Assembly (LL13 Series)	270.60

#### Landscaping

#### LL1396 - 8 Ft. Drawn Box Scraper

Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
	5DDA00025	ATTACHMENTS FOR FIELD CONVERSIONContinued Rear Smooth 12 In. Drum Roller Attachment - 8 Ft.	3,958.91
	5DDA00028	Scarifier Bar Attachment - 8 Ft.	2,800.60

#### Landscaping

#### CA2048E - 4 Ft. Economy Core Aerator

**Equipment for Base Machine** 

Reduces Hard Layer Compaction and Increases Turf Vitality
3/8 In. Formed Category I "A" Frame
2 Bronze Bushings per Rotor for
Wear Resistance on Shaft
3-Point Hitch: Category I
Working Width: 48 In.
Tractor HP: 20 to 50 HP
Spoons:
(48) 3/4 In. Case Hardened Steel
Spoon Penetration: 4-1/2 In.
Spoons Per Hub: 6
Approximate Shipping Weight: 400 lbs.

Overall Width: 54 In.
iMatch Compatible (Quick-Attach System)
Assembly/Set-Up Time:
10 Minutes (Approximate)
Approximate Operating Weight: 284 lbs.
1 Year Warranty

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1141XF		CA2048E - 4 Ft. Economy Core Aerator Order optional weight tanks as attachments.	2,786.00
		STEEL WEIGHT TANK	
9000		Steel Weight Tank (Each order is a quantity of 2 tanks, 2 tanks required per Machine) For sand only. (CA2048E)	699.00
		OPERATOR'S MANUAL AND DECALS	
9200		French Operator's Manual and Decal Kit	No Added Cost
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP950958B	Miscellaneous French Manual Decal (CA20 Series)	0.00
	5BP0099731	Steel Weight Tank CA2048E, Quantity 1 (2 Required Per Machine) For sand only.	361.91

Landscaping

# CA2048E - 4 Ft. Economy Core Aerator Continued

THIS PAGE INTENTIONALLY LEFT BLANK

# Landscaping

# CA2060 - 5 Ft. Standard Duty Core Aerator

**Equipment for Base Machine** 

Reduces Hard Layer Compaction and Increases Turf Vitality
3/8 In. Formed Category I "A" Frame
- Can Hold (2) 170 lb. Sand
Containers - OPTIONAL
2 Bronze Bushings per Rotor for
Wear Resistance on Shaft
3-Point Hitch: Category I and Category II
Working Width: 60 In.
Weight Tray: (2) 19 In. x 21 In.
Tractor HP: 25 to 70 HP
Spoons:
(80) 3/4 In. Case Hardened Steel
Spoon Penetration: 4-1/2 In.

Spoons Per Hub: 8
iMatch Compatible (Quick-Attach System)
Shipping Weight: 500 lbs.
Overall Width: 65 In.
Assembly/Set-Up Time:
10 Minutes (Approximate)
1 Year Warranty

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1131XF		CA2060 - 5 Ft. Standard Duty Core Aerator Order optional weight tanks as attachments.	3,740.00
		STEEL WEIGHT TANK	
9000		Steel Weight Tank (Each order is a quantity of 2 tanks, 2 tanks required per Machine) For sand only. (CA2060)	826.00
		OPERATOR'S MANUAL AND DECALS	
9200		French Operator's Manual and Decal Kit	No Added Cost
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP950958B	Miscellaneous French Manual Decal (CA20 Series)	0.00
	5BP0099734	Steel Weight Tank CA2060, Quantity 1 (2 Required Per Machine) For sand only.	427.91

Landscaping



# Landscaping

# CA2060E - 5 Ft. Economy Core Aerator

**Equipment for Base Machine** 

Reduces Hard Layer Compaction and Increases Turf Vitality
3/8 In. Formed Category I "A" Frame
- Can Hold (2) 125 lb. Sand
Containers - OPTIONAL
2 Bronze Bushings per Rotor for
Wear Resistance on Shaft
3-Point Hitch: Category I
Working Width: 60 In.
Weight Tray: (2) 19 In. x 15 In.
Tractor HP: 20 to 50 HP
Spoons:
(60) 3/4 In. Case Hardened Steel
Spoon Penetration: 4-1/2 In.

Spoons Per Hub: 6
iMatch Compatible (Quick-Attach System)
Approximate Shipping Weight: 400 lbs.
Overall Width: 65 In.
Assembly/Set-Up Time:
10 Minutes (Approximate)
Approximate Operating Weight: 357 lbs.
1 Year Warranty

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1142XF		CA2060E - 5 Ft. Economy Core Aerator Order optional weight tanks as attachments.	2,974.00
		STEEL WEIGHT TANK	
9000		Steel Weight Tank (Each order is a quantity of 2 tanks, 2 tanks required per Machine) For sand only. (CA2060E)	735.00
		OPERATOR'S MANUAL AND DECALS	
9200		French Operator's Manual and Decal Kit	No Added Cost
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP950958B	Miscellaneous French Manual Decal (CA20 Series)	0.00
	5BP0099732	Steel Weight Tank CA2060E, Quantity 1 (2 Required Per Machine) For sand only.	381.71

Landscaping

# CA2060E - 5 Ft. Economy Core Aerator Continued

# Landscaping

# CA2072 - 6 Ft. Standard Duty Core Aerator

**Equipment for Base Machine** 

Reduces Hard Layer Compaction and Increases Turf Vitality
3/8 In. Formed Category I "A" Frame
- Can Hold (2) 220 lb.
Sand Containers - OPTIONAL
2 Bronze Bushings per Rotor for
Wear Resistance on Shaft
3-Point Hitch:
Category I and Category II
Working Width: 72 In.
Weight Tray: (2) 25 In. x 21 In.
Tractor HP: 25 to 70 HP
Spoons:
(96) 3/4 In. Case Hardened Steel
Spoon Penetration: 4-1/2 In.

Spoons Per Hub: 8 Shipping Weight: 600 lbs. Overall Width: 78 In. iMatch Compatible (Quick-Attach System) Assembly/Set-Up Time: 10 Minutes (Approximate) Approximate Operating Weight: 549 lbs. 1 Year Warranty

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1132XF		CA2072 - 6 Ft. Standard Duty Core Aerator Order optional weight tanks as attachments.	4,183.00
		STEEL WEIGHT TANK	
9000		Steel Weight Tank (Each order is a quantity of 2 tanks, 2 tanks required per Machine) For sand only. (CA2072)	888.00
		OPERATOR'S MANUAL AND DECALS	
9200		French Operator's Manual and Decal Kit	No Added Cost
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP950958B	Miscellaneous French Manual Decal (CA20 Series)	0.00
	5BP0099735	Steel Weight Tank CA2072, Quantity 1 (2 Required Per Machine) For sand only.	460.91

Landscaping

# CA2072 - 6 Ft. Standard Duty Core Aerator Continued

# Landscaping

# CA2072E - 6 Ft. Economy Core Aerator


**Equipment for Base Machine** 

Reduces Hard Layer Compaction and Increases Turf Vitality
3/8 In. Formed Category I "A" Frame
- Can Hold (2) 160 lb. Sand
Containers - OPTIONAL
2 Bronze Bushings per Rotor for
Wear Resistance on Shaft
3-Point Hitch: Category I
Working Width: 72 In.
Weight Tray: (2) 25 In. x 15 In.
Tractor HP: 20 to 50 HP
Spoons:
(72) 3/4 In. Case Hardened Steel
Spoon Penetration: 4-1/2 In.

Spoons Per Hub: 6
iMatch Compatible (Quick-Attach System)
Approximate Shipping Weight: 450 lbs.
Overall Width: 78 In.
Assembly/Set-Up Time:
10 Minutes (Approximate)
Approximate Operating Weight: 401 lbs.
1 Year Warranty

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1143XF		CA2072E - 6 Ft. Economy Core Aerator Order optional weight tanks as attachments.	3,253.00
		STEEL WEIGHT TANK	
9000		Steel Weight Tank (Each order is a quantity of 2 tanks, 2 tanks required per Machine) For sand only. (CA2072E)	782.00
		OPERATOR'S MANUAL AND DECALS	
9200		French Operator's Manual and Decal Kit	No Added Cost
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP950958B	Miscellaneous French Manual Decal (CA20 Series)	0.00
	5BP0099733	Steel Weight Tank CA2072E, Quantity 1 (2 Required Per Machine) For sand only.	405.91

Landscaping

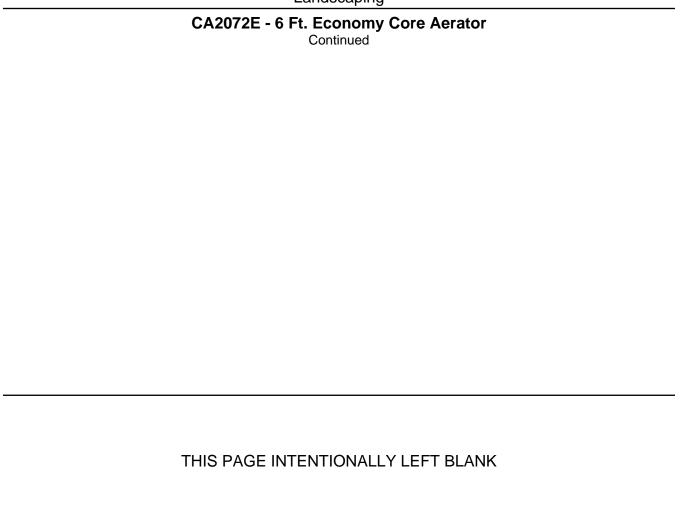

# Landscaping

# **PC1001 Integral One Row Cultivator**

Equipment for Base Machine

Hitch: Lift-type, Category I, iMatch Compatible
Working Row Width:
30 to 60 In. (762 to 1524 mm)
Transport Length:
37 In. (939.8 mm)
Transport Width:
50 5 In. (1 282 7 mm) 50.5 In. (1,282.7 mm)
Transport Height:
36 In. (914.4 mm)
Tractor Engine HP Range:

25 - 45 HP Standard Tines: 6 Curved and Reversible Tines, 1.75 In. (44.45 mm) x 10 In. (254 mm) Tine Spacing: Adjustable Parking Stand Included

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3441XF		PC1001 Integral One Row Cultivator  Order in multiples of two.	548.00
		OPERATOR'S MANUAL AND DECALS	
904K		French OM & Decal Kit (PC10)	15.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5TITE511154	<b>Miscellaneous</b> French Kit - Includes Operator's Manual, Parts Catalog and Safety Decals <i>PC1001 and PC1072</i>	15.40

Landscaping



# Landscaping

# PC1072 - 6 Ft. Integral Field Cultivator (13 S-tines)

Equipment for Base Machine

Hitch:
Lift-type, Category I,
iMatch Compatible
Working Width:
72 In. (1,828.8 mm)
Transport Length:
37.5 In. (952.5 mm)
Transport Width:
73.25 In. ( 1,860.6 mm)
Transport Height:
39 In. (990.6 mm)
Tractor Engine HP Range:

25 - 45 HP Standard Tines: 13 Curved and Reversible Tines, 1.25 In. (31.75 mm) x 8 In. (203.2 mm) Tine Spacing: Adjustable

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3442XF		PC1072 - 6 Ft. Integral Field Cultivator (13 S-tines)  Order in multiples of two.	1,081.00
		OPERATOR'S MANUAL AND DECALS	
904K		French OM & Decal Kit (PC10)	15.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5TITE511154	<b>Miscellaneous</b> French Kit - Includes Operator's Manual, Parts Catalog and Safety Decals <i>PC1001 and PC1072</i>	15.40

Landscaping

PC1072 - 6 Ft. Integral Field Cultivator (13 S-tines)
Continued

# Landscaping

# BL1130 - 3 Pt. Mount Debris Blower - U.S.

**Equipment for Base Machine** 

Function: Debris Blower Function: Debris Blower
Length: 47 1/8 In. (1,197 mm)
Width: 50 In. (1,270 mm)
Height: 48 3/4 In. (1,238.3 mm)
Operating Weight: 689 lb. (312.5 kg)
Fan Diameter: 29 1/2 In. (749.3 mm)
Fan Width: 10 in. (254 mm)
Number of Fan Blades: 12
Fan Speed: 1455 RPM
Air Flow: 6,061 cfm (171 cu. meter per minute)
Air Velocity: 141 mph (227 kph)

Air Velocity: 141 mph (227 kph) Air Velocity: 12,400 fpm (3,779.5 mpm)

Outlet Size: 10 5/8 x 6 5/8 In. (269.9 x 168.3 mm) Air Direction: left or right by moving lever Cat. 1 & 2, iMatch and Quick Hitch Compatible Pneumatic gauge wheel standard Approximate Set-Up Time: 30 Minutes

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1571XF		BASE MACHINE  BL1130 - 3 Pt. Mount Debris Blower - U.S.	6,393.00

Attachment Information is not available in MOCI for the base **code 1571XF** 

Landscaping

# BL1130 - 3 Pt. Mount Debris Blower - U.S. Continued

**List Price** 

# FRONTIER PRODUCTS

### Landscaping

# BL2130 - Hydraulic Loader Mount Debris Blower with HP2025 Hydraulic Power Unit -U.S.

### **Equipment for Base Machine**

Function: Debris Blower Length: 47 1/8 In. (1,197 mm) Width: 50 In. (1,270 mm)

Height: 48 3/4 In. (1,238.3 mm)

Operating Weight: 689 lb. (312.5 kg)

Fan Diameter: 29 1/2 In. (749.3 mm) Fan Width: 10 in. (254 mm) Number of Fan Blades: 12 Fan Speed: 1455 RPM Air Flow: 6,061 cfm (171 cu. meter per minute) Air Velocity: 141 mph (227 kph) Air Velocity: 12,400 fpm (3,779.5 mpm) Outlet Size: 10 5/8 x 6 5/8 In. (269.9 x 168.3 mm)

Air Direction: left or right by moving lever

Pneumatic gauge wheel standard Approximate Set-Up Time: 30 Minutes Function: Hydraulic Power Unit

Pressure: 2700 psi Flow: 16 gpm

Reservoir Capacity: 15 gal. System Capacity: 17 gal. System Features: Pressure relieve valve, filter, temperature and oil level gauge, and thermal protection switch Hoses, Tips, and Brackets included Tractor RPM: 540 RPM PTO Manufacturer: Comer Parking Stand: Standard Hitch Category: Category I Quick Hitch Compatibility: iMatch Compatible Approximate Set-Up Time: 120 Minutes

Code	Attachment Identifier	Description	Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1581XF		BL2130 - Hydraulic Loader Mount Debris Blower with HP2025 Hydraulic Power Unit - U.S. Must be used with HP2025 or HP2134 Hydraulic Power Pack Units.	13,980.00
		HYDRAULIC POWER UNITS	
1000		HP2025 - Hydraulic Power Unit, 25 HP <i>Includes wiring harness 5RDF0078 to control the loader mounted implement.</i>	In Base Price
1010		HP2134 - Hydraulic Power Unit, 34 HP Includes wiring harness 5RDF0078 to control the loader mounted implement.	125.00
1095		Less HP2025 Hydraulic Power Unit	-7,785.00
		OIL COOLER	
2000		Oil Cooler for HP2025 and HP2134 Hydraulic Power Units Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation instructions. Recommended for application generating high heat. Not available with option Code 1095.	In Base Price
2095		Less Oil Cooler	-1,989.00
		WIRING HARNESS	
9040		Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console. Not available with option Code 1095.	110.00

### ATTACHMENTS FOR FIELD CONVERSION

# Landscaping

# BL2130 - Hydraulic Loader Mount Debris Blower with HP2025 Hydraulic Power Unit - U.S.

Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		ATTACHMENTS FOR FIELD CONVERSIONContinued	
	5RDF0036	Miscellaneous Oil Cooler for HP2025 and HP2134 Hydraulic Power Units Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation instructions. Recommended for application generating high heat.	2,063.60
	5RDF0038	Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console.	114.40
	5RDF0078	Wiring Harness for HP2025 and HP2134 Hydraulic Power Units to control Loader Mounted Attachment Includes complete wiring harness from switch in the console to 3 cavities connectors for front implements.	159.51

# Landscaping

# LP1048L - 4 Ft. Limited Category 1 3-Point Land Plane

**Equipment for Base Machine** 

Working Width: 48 in.
Overall Dimensions: H 32 in. x W 53 in. x L 45 in.
Shipping Weight: 363 lbs.
End Plate Thickness: 3/16 in.
Hitch: Limited Category 1
Lower Lift Pin Height: 12 in.
Cutting Edges: (2) 3/8 in. x 6 in., Reversible,
Replaceable
Skid Shoes: Steel, welded, 3/8 in. thick, 2 in.
wide, 38 in. long

Assembly/Set-Up Time: 30 Minutes Operating Weight: 347 lbs. Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
2551XF		LP1048L - 4 Ft. Limited Category 1 3-Point Land Plane	1,205.00
		DESTINATION	
0202		United States	No Added Cost
0184		Canada	No Added Cost
0205		Quebec, Canada	No Added Cost
		OPERATOR'S MANUAL AND DECALS	
0409		LP10L/ENGLISH OM	No Added Cost
0413		LP10L/FRENCH OM/DECAL KIT	No Added Cost
0437		LP10L/SPANISH OM/DECAL KIT	No Added Cost
		ATTACHMENTS FOR FIELD CONVERSION	
	5TL16333	Miscellaneous LP10L/FRENCH OM/DECAL KIT	59.40
	5TL16334	LP10L/SPANISH OM/DECAL KIT	59.40

Landscaping

# LP1048L - 4 Ft. Limited Category 1 3-Point Land Plane Continued

# Landscaping

# LP1060L - 5 Ft. Limited Category 1 3-Point Land Plane

**Equipment for Base Machine** 

Working Width: 60 in.
Overall Dimensions: H 32 in. x W 65 in. x L 45 in.
Shipping Weight: 392 lbs.
End Plate Thickness: 3/16 in.
Hitch: Limited Category 1
Lower Lift Pin Height: 12 in.
Cutting Edges: (2) 3/8 in. x 6 in., Reversible,
Replaceable
Skid Shoes: Steel, welded, 3/8 in. thick, 2 in.
wide, 38 in. long

Assembly/Set-Up Time: 30 Minutes Operating Weight: 376 lbs. Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
2561XF		LP1060L - 5 Ft. Limited Category 1 3-Point Land Plane	1,280.00
		DESTINATION	
0202		United States	No Added Cost
0184		Canada	No Added Cost
0205		Quebec, Canada	No Added Cost
		OPERATOR'S MANUAL AND DECALS	
0409		LP10L/ENGLISH OM	No Added Cost
0413		LP10L/FRENCH OM/DECAL KIT	No Added Cost
0437		LP10L/SPANISH OM/DECAL KIT	No Added Cost
		ATTACHMENTS FOR FIELD CONVERSION	
	5TL16333	Miscellaneous LP10L/FRENCH OM/DECAL KIT	59.40
	5TL16334	LP10L/SPANISH OM/DECAL KIT	59.40

Landscaping

# LP1060L - 5 Ft. Limited Category 1 3-Point Land Plane Continued

47.31

# Educational Services Commission of New Jersey NJ State Approved Co-op #65MCESCCPS FRONTIER PRODUCTS

# Landscaping

# **LP1048 Standard Drawn Land Plane**

**Equipment for Base Machine** 

Working Width: 48 In.
Shipping Weight: 445 lbs.
End Plate Thickness: 3/16 In.
Duty: Light Duty
Cutting Edges: (2)
Assembly/Set-Up Time: 15 Minutes
Approximate Operating Weight: 365 lbs.

5TL15746

Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1441XF		LP1048 Standard Drawn Land Plane	1,604.00
		ATTACHMENTS FOR FIELD CONVERSION	
		Miscellaneous	

French Kit - Includes Operator's Manual and Safety Decals

Landscaping

# LP1048 Standard Drawn Land Plane Continued

# Landscaping

# **LP1060 Standard Drawn Land Plane**

**Equipment for Base Machine** 

Working Width: 60 In.
Shipping Weight: 495 lbs.
End Plate Thickness: 3/16 In.
Duty: Light Duty
Cutting Edges: (2)
Assembly/Set-Up Time: 15 Minutes
Approximate Operating Weight: 415 lbs.

Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		color one couch term against quitegery	_
		BASE MACHINE	
1442XF		LP1060 Standard Drawn Land Plane	1,617.00
		ATTACHMENTS FOR FIELD CONVERSION	

Miscellaneous

5TL15746 French Kit - Includes Operator's Manual and Safety Decals 47.31

Landscaping

# LP1060 Standard Drawn Land Plane Continued

# Landscaping

### LP1160 - 5 Ft. 3-Point Land Plane

**Equipment for Base Machine** 

3-Point Hitch: Category I

iMatch Compatible (Quick-Attach System)
Working Width: 60 In.
Tractor HP Recommendation: 18 to 50 HP

Skid Shoes: Weld on, 3/16 In. Shipping Weight: 573 lbs. End Plate Thickness: 3/16 In.

Duty: Standard Duty Cutting Edges: (2) Reversible

Assembly/Set-Up Time: 10 Minutes Approximate Operating Weight: 520 lbs. Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	

### **BASE MACHINE**

1451XF 1,654.00 LP1160 - 5 Ft. 3-Point Land Plane

### ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous

5TL15746 French Kit - Includes Operator's Manual and Safety Decals 47.31

# LP1160 - 5 Ft. 3-Point Land Plane Continued

Grounds Equipment - Bid #ESCNJ 18/19-25

# FRONTIER PRODUCTS

# Landscaping

### LP1172 - 6 Ft. 3-Point Land Plane

**Equipment for Base Machine** 

3-Point Hitch: Category I

iMatch Compatible (Quick-Attach System)
Working Width: 72 In.
Tractor HP Recommendation: 18 to 50 HP

1452XF

Skid Shoes: Weld on, 3/16 In. Shipping Weight: 628 lbs. End Plate Thickness: 3/16 In. Duty: Standard Duty Cutting Edges: (2) Reversible

Assembly/Set-Up Time: 10 Minutes Approximate Operating Weight: 548 lbs. Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	

### ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous

5TL15746 French Kit - Includes Operator's Manual and Safety Decals

LP1172 - 6 Ft. 3-Point Land Plane

47.31

1,764.00

# LP1172 - 6 Ft. 3-Point Land Plane Continued

26 March	2021	US &	Canada

# Landscaping

### LP1184 - 7 Ft. 3-Point Land Plane

**Equipment for Base Machine** 

3-Point Hitch: Category I and II iMatch Compatible (Quick-Attach System) Working Width: 84 In. Tractor HP Recommendation: 22 to 75 HP

Skid Shoes: Weld on, 3/16 In. Shipping Weight: 684 lbs.

End Plate Thickness: 3/16 In. Duty: Standard Duty Cutting Edges: (2) Reversible

Assembly/Set-Up Time: 10 Minutes Approximate Operating Weight: 604 lbs. Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	

### **BASE MACHINE**

1453XF 1,939.00 LP1184 - 7 Ft. 3-Point Land Plane

### ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous

5TL15746 French Kit - Includes Operator's Manual and Safety Decals 47.31

# LP1184 - 7 Ft. 3-Point Land Plane Continued

# Landscaping

### LP1196 - 8 Ft. 3-Point Land Plane

**Equipment for Base Machine** 

3-Point Hitch: Category I and II iMatch Compatible (Quick-Attach System) Working Width: 96 In.
Tractor HP Recommendation: 22 to 75 HP Skid Shoes: Weld on, 3/16 In.
Shipping Weight: 732 lbs.
End Plate Thickness: 3/16 In.
Duty: Standard Duty
Cutting Edges: (2) Reversible
Assembly/Set-Up Time:

Unit Arrives Fully Assembled Approximate Operating Weight: 652 lbs. Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1454XF		LP1196 - 8 Ft. 3-Point Land Plane	2,033.00

### ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous

5TL15746 French Kit - Includes Operator's Manual and Safety Decals

47.31

. . . . . .

Landscaping

# LP1196 - 8 Ft. 3-Point Land Plane Continued

# Landscaping

# LP1207 - 7 Ft. Heavy Duty 3-Point Land Plane

**Equipment for Base Machine** 

Working Width: 84 In.
Shipping Weight: 1,048 lbs.
Operating Weight: 998 lbs.
3 Pt. Cat. 1 & 2
iMatch Compatible (Quick-Attach System)
Cat. 2 Quick Couple Compatible (Quick-Attach System)
Implement Code: 57.6
End Plate Thickness: 3/16 In.
Duty: Heavy Duty
Cutting Edges: (2) 1/2 x 6 in. Reversible
Adjustable Skid Shoes
Skid Shoe Thickness: 3/8 in.

Scarifier Shanks: (4) Available -Optional Assembly/Set-Up Time: 15 Minutes Warranty: 1 Year

Ballasting may be required. Please see your tractor operator's manual and your John Deere dealer.

			List Price
	Attachment		Suggested
Code	Identifier	Description	USD (\$)

Select One Code From Each Required Category

### **BASE MACHINE**

1631XF LP1207 - 7 Ft. Heavy Duty 3-Point Land Plane 3,097.00

### ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous

5TL1207KT Scarifier Kit (LP1207) 201.31

Landscaping

# LP1207 - 7 Ft. Heavy Duty 3-Point Land Plane Continued

### Landscaping

# LP1208 - 8 Ft. Heavy Duty 3-Point Land Plane

**Equipment for Base Machine** 

Working Width: 96 In.
Shipping Weight: 1,160 lbs.
Operating Weight: 1,110 lbs.
3 Pt. Cat. 1 & 2
iMatch Compatible (Quick-Attach System)
Cat. 2 Quick Couple Compatible (Quick-Attach System)
Implement Code: 64.1
End Plate Thickness: 3/16 In.
Duty: Heavy Duty
Cutting Edges: (2) 1/2 x 6 in. Reversible
Adjustable Skid Shoes
Skid Shoe Thickness: 3/8 in.

Scarifier Shanks: (6) Available -Optional Assembly/Set-Up Time: 15 Minutes Warranty: 1 Year

Ballasting may be required. Please see your tractor operator's manual and your John Deere dealer.

			List Price
	Attachment		Suggested
Code	Identifier	Description	USD (\$)

Select One Code From Each Required Category

### **BASE MACHINE**

1632XF LP1208 - 8 Ft. Heavy Duty 3-Point Land Plane 3,437.00

### ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous

5TL1208KT Scarifier Kit (LP1208) 323.40

Landscaping

# LP1208 - 8 Ft. Heavy Duty 3-Point Land Plane Continued

### Landscaping

### LP1210 - 10 Ft. Heavy Duty 3-Point Land Plane

**Equipment for Base Machine** 

Working Width: 120 In.
Shipping Weight: 1,304 lbs.
Operating Weight: 1,254 lbs.
3 Pt. Cat. 2
Cat. 2 Quick Couple Compatible (Quick-Attach System)
Implement Code: 72.4
End Plate Thickness: 3/16 In.
Duty: Heavy Duty
Cutting Edges: (2) 1/2 x 6 in. Reversible Adjustable Skid Shoes
Skid Shoe Thickness: 3/8 in.

Scarifier Shanks: (8) Available -Optional Assembly/Set-Up Time: 15 Minutes Warranty: 1 Year

Ballasting may be required. Please see your tractor operator's manual and your John Deere dealer.

			List Price
	Attachment		Suggested
Code	Identifier	Description	USD (\$)

Select One Code From Each Required Category

#### **BASE MACHINE**

1633XF LP1210 - 10 Ft. Heavy Duty 3-Point Land Plane 3,882.00

#### ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous

5TL1210KT Scarifier Kit (LP1210) 431.20

Landscaping

### LP1210 - 10 Ft. Heavy Duty 3-Point Land Plane Continued

Pivot: 360 Degrees

### FRONTIER PRODUCTS

### Landscaping

### LR2060L - 5 Ft. Standard Duty Landscape Rake - Limited Category I

**Equipment for Base Machine** 

Tine Dimensions:
5/16 In. x 1 In. x 12 In. Spring Steel
Tine Spacing: 30 at 1 In.
Working Width: 60 In.
Tractor HP (Maximum): 25 HP
Parking Stand - Standard
Raking Positions:
5 Forward (0, 15, 30 Degrees),
5 Reverse (0, 15 Degrees)
3-Point Hitch:
Limited Category I (Aftermarket
Category 0 Lift Pins Available)

Operating Weight: 168 lbs. Shipping Weight: 422 lbs. (Quantity of 2) Assembly/Set-Up Time: 30 Minutes Packaged Two Per Crate Gauge Wheels: Optional Warranty: 1 Year

			List Price
	Attachment		Suggested
Code	Identifier	Description	USD (\$)

Select One Code From Each Required Category

#### **BASE MACHINE**

1191XF LR2060L - 5 Ft. Standard Duty Landscape Rake - Limited Category I

Order in multiples of two.

936.00

#### ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous

5WS343465 Dual Gauge Wheel Kit (LR2060L)

519.20

Landscaping

LR2060L - 5	5 Ft. Standard Duty Landscape Rake - Limited Category I Continued	
	THIS PAGE INTENTIONALLY LEFT BLANK	

### Landscaping

### LR2072 - 6 Ft. Standard Duty Landscape Rake

**Equipment for Base Machine** 

Duty: Standard Duty
Rake Width: 72 In.
3-Point Hitch:
Category I
Tractor HP:
19 to 40 HP
Tine Dimension:
5/16 In. x 1 In. Spring Steel
Tine Spacing: 36 at 1 In.
Raking Positions:
5 Forward (0, 15, 30 Degree) Each Side
- 3 Reverse (0, 15 Degree) Each Side
Parking Stand: Standard
Approximate Operating Weight: 200 lbs.
Shipping Weight:

486 lbs. (Quantity 2)
Assembly/Set-Up Time:
30 Minutes (Approximate)
Pivot: 360 Degrees
Packaged 2 per Crate
Gauge Wheel Kit
 (Includes Two Wheels and Arms): Optional
Warranty: 1 Year

Code Attachment Identifier	Description	Suggested USD (\$)
	Select One Code From Each Required Category	$\neg$

#### **BASE MACHINE**

1181XF LR2072 - 6 Ft. Standard Duty Landscape Rake 1,083.00

Order in multiples of two.

### ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous

5WS341775 Dual Gauge Wheel Kit (LR2072, LR2084, LR2172, LR2184 and LR2196) 554.40

Landscaping

### LR2072 - 6 Ft. Standard Duty Landscape Rake Continued

### Landscaping

### LR2084 - 7 Ft. Standard Duty Landscape Rake

**Equipment for Base Machine** 

Duty: Standard Duty
Rake Width: 84 In.
3-Point Hitch:
Category I
Tractor HP:
19 to 40 HP
Tine Dimension:
5/16 In. x 1 In. Spring Steel
Tine Spacing: 42 at 1 In.
Raking Positions:
5 Forward (0, 15, 30 Degree) Each Side
- 3 Reverse (0, 15 Degree) Each Side
Parking Stand: Standard
Pivot: 360 Degrees
Approximate Operating Weight:

221 lbs.
Approximate Shipping Weight:
528 lbs. (Quantity 2)
Assembly/Set-Up Time:
30 Minutes (Approximate)
Packaged 2 per Crate
Gauge Wheel Kit
 (Includes Two Wheels and Arms): Optional
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Och at Och College Food Box in 10 days	7
		Select One Code From Each Required Category	J
		BASE MACHINE	
1182XF		LR2084 - 7 Ft. Standard Duty Landscape Rake Order in multiples of two.	1,222.00

#### ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous

5WS341775 Dual Gauge Wheel Kit (LR2072, LR2084, LR2172, LR2184 and LR2196)

554.40

Landscaping

### LR2084 - 7 Ft. Standard Duty Landscape Rake Continued

### Landscaping

### LR2172 - 6 Ft. Medium Duty Landscape Rake

**Equipment for Base Machine** 

Duty: Medium Duty
Rake Width: 72 In.
3-Point Hitch:
Category I
Tractor HP:
23 to 55 HP
Tines Dimension:
5/16 In. x 1 In. Spring Steel
Tine Spacing: 36 at 1 In.
Raking Positions:
5 Forward (0, 15, 30 Degree) Each Side
- 3 Reverse (0, 15 Degree) Each Side
Parking Stand: Standard
Approximate Operating Weight: 282 lbs.

5WS341775

Approximate Shipping Weight: 368 lbs.
Assembly/Set-Up Time:
30 Minutes (Approximate)
Gauge Wheel Assembly Kit
(Two Wheels and Arms): Optional
6 Ft. Flip Down Grader Blade: Optional
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1201XF		BASE MACHINE  LR2172 - 6 Ft. Medium Duty Landscape Rake	1,489.00
1201XF			1,489.00

Dual Gauge Wheel Kit (LR2072, LR2084, LR2172, LR2184 and LR2196)

554.40

Landscaping

### LR2172 - 6 Ft. Medium Duty Landscape Rake Continued

### Landscaping

### LR2184 - 7 Ft. Medium Duty Landscape Rake

**Equipment for Base Machine** 

Duty: Medium Duty
Rake Width: 84 In.
3-Point Hitch:
Category I
Tractor HP:
23 to 55 HP
Tine Dimension:
5/16 In. x 1 In. Spring Steel
Tine Spacing: 42 at 1 In.
Raking Positions:
5 Forward (0, 15, 30 Degree) Each Side
- 3 Reverse (0, 15 Degree) Each Side
Parking Stand: Standard
Approximate Operating Weight: 307 lbs.

5WS341775

Approximate Shipping Weight: 393 lbs. Assembly/Set-Up Time: 30 Minutes (Approximate) Gauge Wheel Assembly Kit (Two Wheels and Arms): Optional 7 Ft. Flip Down Grader: Optional Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1202XF		BASE MACHINE  LR2184 - 7 Ft. Medium Duty Landscape Rake	1,603.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5WS341987	Miscellaneous 7 Ft. Flip Down Blade (LR2184)	372.91

Dual Gauge Wheel Kit (LR2072, LR2084, LR2172, LR2184 and LR2196)

554.40

Landscaping

### LR2184 - 7 Ft. Medium Duty Landscape Rake Continued

### Landscaping

### LR2196 - 8 Ft. Medium Duty Landscape Rake

**Equipment for Base Machine** 

Duty: Medium Duty
Rake Width: 96 In.
3-Point Hitch:
Category I
Tractor HP: 27 to 55 HP
Tines Dimension:
5/16 In. x 1 In. Spring Steel
Tine Spacing: 48 at 1 In.
Raking Positions:
5 Forward (0, 15, 30 Degree) Each Side
- 3 Reverse (0, 15 Degree) Each Side
Approximate Operating Weight: 332 lbs.
Approximate Shipping Weight: 418 lbs.

5WS341775

Parking Stand: Standard Assembly/Set-Up Time: 30 Minutes (Approximate) Gauge Wheel Assembly Kit (Two Wheels and Arms): Optional 8 Ft. Flip Down Grader: Optional Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	]
1203XF		BASE MACHINE LR2196 - 8 Ft. Medium Duty Landscape Rake	1,712.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5WS341988	Miscellaneous 8 Ft. Flip Down Blade (LR2196)	427.91

Dual Gauge Wheel Kit (LR2072, LR2084, LR2172, LR2184 and LR2196)

554.40

Landscaping

### LR2196 - 8 Ft. Medium Duty Landscape Rake Continued

Landscaping

### LR5060 - 5 Ft. Standard Duty Landscape Rake

**Equipment for Base Machine** 

Duty: Standard Duty
Rake Width: 60 In.
3-Point Hitch:
Category I
Tractor HP:
15 to 35 HP
Tine Dimension:
5/16 In. x 1 In. Spring Steel
Tine Spacing: 36 at 1 In.
Raking Positions:
5 Forward (0, 15, 30 Degree) Each Side
- 5 Reverse (0, 15, 30 Degree) Each Side
Parking Stand: Standard
Approximate Operating Weight: 248 lbs.

Shipping Weight: 554 lbs. (Quantity 2) Assembly/Set-Up Time: 15 Minutes (Approximate) Pivot: 360 Degrees Packaged 2 per Crate Gauge Wheel Kit: NA Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1661XF		LR5060 - 5 Ft. Standard Duty Landscape Rake Order in multiples of two.	922.00

Attachment Information is not available in MOCI for the base code 1661XF

Landscaping

### LR5060 - 5 Ft. Standard Duty Landscape Rake Continued

### FRONTIER PRODUCTS

### Landscaping

### LR5072 - 6 Ft. Standard Duty Landscape Rake

**Equipment for Base Machine** 

Duty: Standard Duty
Rake Width: 72 In.
3-Point Hitch:
Category I
Tractor HP:
20 to 38 HP
Tine Dimension:
5/16 In. x 1 In. Spring Steel
Tine Spacing: 36 at 1 In.
Raking Positions:
5 Forward (0, 15, 30 Degree) Each Side
- 5 Reverse (0, 15, 30 Degree) Each Side
Parking Stand: Standard
Approximate Operating Weight: 272 lbs.

Shipping Weight:
602 lbs. (Quantity 2)
Assembly/Set-Up Time:
15 Minutes (Approximate)
Pivot: 360 Degrees
Packaged 2 per Crate
Gauge Wheel Kit: NA
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1662XF		LR5072 - 6 Ft. Standard Duty Landscape Rake Order in multiples of two.	999.00

Attachment Information is not available in MOCI for the base code 1662XF

Landscaping

### LR5072 - 6 Ft. Standard Duty Landscape Rake Continued

### Landscaping

### LR5084 - 7 Ft. Standard Duty Landscape Rake

**Equipment for Base Machine** 

Duty: Standard Duty
Rake Width: 84 In.
3-Point Hitch:
Category I
Tractor HP:
20 to 50 HP
Tine Dimension:
5/16 In. x 1 In. Spring Steel
Tine Spacing: 36 at 1 In.
Raking Positions:
5 Forward (0, 15, 30 Degree) Each Side
- 5 Reverse (0, 15, 30 Degree) Each Side
Parking Stand: Standard
Approximate Operating Weight: 287 lbs.

Shipping Weight:
632 lbs. (Quantity 2)
Assembly/Set-Up Time:
15 Minutes (Approximate)
Pivot: 360 Degrees
Packaged 2 per Crate
Gauge Wheel Kit: NA
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1663XF		LR5084 - 7 Ft. Standard Duty Landscape Rake Order in multiples of two.	1,053.00

Attachment Information is not available in MOCI for the base code 1663XF

Landscaping

LR5084 - 7 Ft. Standard Duty Landscape Rake
Continued
THE DAGE INTENTIONALLY LEFT DLANK
THIS PAGE INTENTIONALLY LEFT BLANK

Landscaping

### LR5096 - 8 Ft. Standard Duty Landscape Rake

**Equipment for Base Machine** 

Duty: Standard Duty
Rake Width: 96 In.
3-Point Hitch:
Category I
Tractor HP:
20 to 50 HP
Tine Dimension:
5/16 In. x 1 In. Spring Steel
Tine Spacing: 36 at 1 In.
Raking Positions:
5 Forward (0, 15, 30 Degree) Each Side
- 5 Reverse (0, 15, 30 Degree) Each Side
Parking Stand: Standard
Approximate Operating Weight: 324 lbs.

Shipping Weight:
706 lbs. (Quantity 2)
Assembly/Set-Up Time:
15 Minutes (Approximate)
Pivot: 360 Degrees
Packaged 2 per Crate
Gauge Wheel Kit: NA
Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1664XF		LR5096 - 8 Ft. Standard Duty Landscape Rake Order in multiples of two.	1,135.00

Attachment Information is not available in MOCI for the base code 1664XF

Landscaping



### Landscaping

### LR5048L - 4 Ft. Limited Category 1 Economy Duty Landscape Rake

**Equipment for Base Machine** 

Duty: Economy Duty
Rake Width: 48 In.
3-Point Hitch:
Limited Category I
Tractor HP: 18 PTO HP Max
Tine Dimension:
5/16 In. x 1 In. Spring Steel
Tine Spacing: 24 at 1 In.
Raking Positions:
5 Forward (0, 15, 30 Degree) Each Side
- 5 Reverse (0, 15, 30 Degree) Each Side
Parking Stand: Standard
Approximate Operating Weight: 186 lbs.
Shipping Weight:

430 lbs. (Quantity 2)
Assembly/Set-Up Time:
15 Minutes (Approximate) - Per Pair
Pivot: 360 Degrees
Packaged 2 per Crate
Gauge Wheel Kit: Yes
Warranty: 1 Year

			List Price
	Attachment		Suggested
Code	Identifier	Description	USD (\$)

Select One Code From Each Required Category

#### **BASE MACHINE**

1761XF LR5048L - 4 Ft. Limited Category 1 Economy Duty Landscape Rake

Order in multiples of two.

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous

5TITE511225 LR50L Gauge Wheel Kit

Includes two solid wheels, two mounting brackets, and hardware.

309.11

736.00

Landscaping

### LR5048L - 4 Ft. Limited Category 1 Economy Duty Landscape Rake Continued

THIS	SPA	GF II	NTFN	ITIONAL	IYIFF	T BLANK
	<i>-</i>	$\circ$	<b>1</b>   L   1	4 I I O I 4/ \L		

Landscaping

### LR5060L - 5 Ft. Limited Category 1 Economy Duty Landscape Rake

**Equipment for Base Machine** 

Duty: Economy Duty
Rake Width: 60 In.
3-Point Hitch:
Limited Category I
Tractor HP: 18 PTO HP Max
Tine Dimension:
5/16 In. x 1 In. Spring Steel
Tine Spacing: 30 at 1 In.
Raking Positions:
5 Forward (0, 15, 30 Degree) Each Side
- 5 Reverse (0, 15, 30 Degree) Each Side
Parking Stand: Standard
Approximate Operating Weight: 205 lbs.
Shipping Weight:

468 lbs. (Quantity 2)
Assembly/Set-Up Time:
15 Minutes (Approximate) - Per Pair
Pivot: 360 Degrees
Packaged 2 per Crate
Gauge Wheel Kit: Yes
Warranty: 1 Year

			List Price
	Attachment		Suggested
Code	Identifier	Description	USD (\$)

Select One Code From Each Required Category

#### **BASE MACHINE**

1762XF LR5060L - 5 Ft. Limited Category 1 Economy Duty Landscape Rake

Order in multiples of two.

847.00

#### ATTACHMENTS FOR FIELD CONVERSION

#### Miscellaneous

5TITE511225 LR50L Gauge Wheel Kit

Includes two solid wheels, two mounting brackets, and hardware.

309.11

Landscaping

### LR5060L - 5 Ft. Limited Category 1 Economy Duty Landscape Rake Continued

ΤI	ΗІ	S	PA	GE	INT	ΈN	JTI(	ANC	LLY I	LEFT	BLA	١N٨	Κ

### **PM1001 Integral Middle Buster**

Equipment for Base Machine

Hitch: Lift-type, Category I, Lift-type, Category I, iMatch Compatible
Working Depth:
Up to 12 In. (304.8 mm)
Transport Length:
15 In. (381 mm)
Transport Width:
32 In. (812.8 mm)
Transport Height:
32 In. (812.8 mm) Tractor Engine HP Range: 25 - 45 HP Blade: Double-Wing Cutting Blade, 19 In. (482.6 mm) x 11 In. (279.4 mm)

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3461XF		PM1001 Integral Middle Buster Order in multiples of two.	300.00
		OPERATOR'S MANUAL AND DECALS	
904L		French OM & Decal Kit (PM10)	15.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5TITE511154	<b>Miscellaneous</b> French Kit - Includes Operator's Manual, Parts Catalog and Safety Decals <i>PM1001</i>	15.40

PM1001 Integral Middle Buster Continued
THIS PAGE INTENTIONALLY LEFT BLANK

### PHA006 Post Hole Auger 6 In. for PHD100

Equipment for Base Machine

Diameter: 6 In.
Length: 36 In.
Weight: 24 lbs.
Flighting Type: Single
Flighting Thickness: 3/16 In.
Compatible With Digger Model Number(s): PHD100

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	]
		BASE MACHINE	
1211XF		PHA006 Post Hole Auger 6 In. for PHD100	363.00

Attachment Information is not available in MOCI for the base **code 1211XF** 

Landscaping

PHA006 Post Hole Auger 6 In. for PHD100 Continued	

### PHA009 Post Hole Auger 9 In. for PHD100

Equipment for Base Machine

Diameter: 9 In.
Length: 36 In.
Weight: 42 lbs.
Flighting Type: Double
Flighting Thickness: 3/16 In.
Compatible With Digger Model Number(s): PHD100

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1212XF		BASE MACHINE PHA009 Post Hole Auger 9 In. for PHD100	387.00

Attachment Information is not available in MOCI for the base **code 1212XF** 

Landscaping

### PHA012 Post Hole Auger 12 In. for PHD100

Equipment for Base Machine

Diameter: 12 In.
Length: 36 In.
Weight: 52 lbs.
Flighting Type: Double
Flighting Thickness: 3/16 In.
Compatible With Digger Model Number(s): PHD100

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1213XF		BASE MACHINE PHA012 Post Hole Auger 12 In. for PHD100	481.00

Attachment Information is not available in MOCI for the base **code 1213XF** 

Landscaping

### PHA012 Post Hole Auger 12 In. for PHD100 Continued

### PHA106 Post Hole Auger 6 In. for PHD200/300/400

Equipment for Base Machine

Diameter: 6 In. Length: 48 In. Weight: 32 lbs. Flighting Type: Single Flighting Thickness: 3/16 In. Compatible With Digger Model Number(s): PHD200, PHD300, PHD400

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1214XF		BASE MACHINE PHA106 Post Hole Auger 6 In. for PHD200/300/400	364.00

Attachment Information is not available in MOCI for the base code 1214XF

Landscaping

## PHA106 Post Hole Auger 6 In. for PHD200/300/400 Continued

### PHA109 Post Hole Auger 9 In. for PHD200/300/400

Equipment for Base Machine

Diameter: 9 In.
Length: 48 In.
Weight: 55 lbs.
Flighting Type: Double
Flighting Thickness: 3/16 In.
Compatible With Digger Model Number(s):
PHD200, PHD300, PHD400

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1215XF		BASE MACHINE PHA109 Post Hole Auger 9 In. for PHD200/300/400	383.00

Attachment Information is not available in MOCI for the base **code 1215XF** 

PHA109 Post Hole Auger 9 In. for PHD200/300/400 Continued	
THIS PAGE INTENTIONALLY LEFT BLANK	

### PHA112 Post Hole Auger 12 In. for PHD200/300/400

Equipment for Base Machine

Diameter: 12 In.
Length: 48 In.
Weight: 55 lbs.
Flighting Type: Double
Flighting Thickness: 3/16 In.
Compatible With Digger Model Number(s):
PHD200, PHD300, PHD400

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1216XF		BASE MACHINE PHA112 Post Hole Auger 12 In. for PHD200/300/400	465.00

Attachment Information is not available in MOCI for the base **code 1216XF** 

Landscaping

# PHA112 Post Hole Auger 12 In. for PHD200/300/400 Continued

### THIS PAGE INTENTIONALLY LEFT BLANK

### PHA118 Post Hole Auger 18 In. for PHD300/400

Equipment for Base Machine

Diameter: 18 In.
Length: 48 In.
Weight: 80 lbs.
Flighting Type: Double
Flighting Thickness: 1/4 In.
Compatible With Digger Model Number(s):
PHD300, PHD400

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1217XF		BASE MACHINE PHA118 Post Hole Auger 18 In. for PHD300/400	628.00

Attachment Information is not available in MOCI for the base **code 1217XF** 

Landscaping

# PHA118 Post Hole Auger 18 In. for PHD300/400 Continued

### PHA124 Post Hole Auger 24 In. for PHD300/400

Equipment for Base Machine

Diameter: 24 In. Length: 48 In. Weight: 105 lbs. Flighting Type: Double Flighting Thickness: 1/4 In. Compatible With Digger Model Number(s): PHD300, PHD400

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1218XF		BASE MACHINE PHA124 Post Hole Auger 24 In. for PHD300/400	887.00

Attachment Information is not available in MOCI for the base **code 1218XF** 

PHA124 Post Hole Auger 24 In. for PHD300/400  Continued

## NJ State Approved Co-op #65MCESCCPS FRONTIER PRODUCTS

### Landscaping

### PHA130 Post Hole Auger 30 In. for PHD300/400

Equipment for Base Machine

Diameter: 30 In.
Length: 44 In.
Weight: 213 lbs.
Flighting Type:
Double (15 In. and 30 In.)
Flighting Thickness: 5/16 In.
Compatible With Digger Model Number(s):

PHD300, PHD400

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1219XF		BASE MACHINE  PHA130 Post Hole Auger 30 In. for PHD300/400  Tapered flighting for planting trees.	1,781.00

Attachment Information is not available in MOCI for the base **code 1219XF** 

PHA130 Post Hole Auger 30 In. for PHD300/400  Continued
THIS PAGE INTENTIONALLY LEFT BLANK

### FRONTIER PRODUCTS

### Landscaping

### PHD100 Post Hole Digger Up to 25HP Category I Hitch

Equipment for Base Machine

Boom OD: 2-7/8 In.
Yoke OD: 2-3/8 In.
Auger Speed: 180 RPM
Gearbox Gear Ratio: 3:1
Gearbox HP Rating: 25 HP
PTO HP Range: 18-25 HP
3-Point Hitch Category: Category I
Works with Auger Model Numbers:
PHA006, PHA009, PHA012

Weight: 112 lbs. Shipping Weight (2 per Crate): 330 lbs. Set-Up Time: 20 Minutes

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1221XF		PHD100 Post Hole Digger Up to 25HP Category I Hitch Order in multiples of two.	1,252.00
		HOOKUP STAND	
9000		Hook-Up Stand For customer use.	529.00
		OPERATOR'S MANUAL AND DECALS	
9200		French Operator's Manual and Decal Kit	No Added Cost
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP950960B	Miscellaneous French OM & Decal Kit Post Hole Diggers Destination of Quebec only. Includes French safety decals and manul.	0.00
	BLV11199	John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the compatibility. One implement driveline yoke bundle is needed per implement, and remains with implement at all times (field install required).	275.00
	5BP480099851	Post Hole Digger Hookup Stand For customer use.	548.91

Landscaping

# PHD100 Post Hole Digger Up to 25HP Category I Hitch Continued

THIS PAGE INTENTIONALLY LEFT BLANK

### FRONTIER PRODUCTS

### Landscaping

### PHD200 Post Hole Digger Up to 40HP Category I Hitch

Equipment for Base Machine

Boom OD: 3-1/2 In.
Yoke OD: 2-7/8 In.
Auger Speed: 180 RPM
Gearbox Gear Ratio: 3:1
Gearbox HP Rating: 40 HP
PTO HP Range: 18-40 HP
3-Point Hitch Category: Category I
Works with Auger Model Numbers:
PHA106, PHA109, PHA112

List Price

Weight: 200 lbs. Shipping Weight (2 per Crate): 470 lbs. Set-Up Time: 20 Minutes

Code	Attachment Identifier	Description	Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1222XF		PHD200 Post Hole Digger Up to 40HP Category I Hitch Order in multiples of two.	1,368.00
		POST HOLE DIGGER DOWN FORCE KIT	
9010		Post Hole Digger Down Force Kit For PHD200	784.00
		HOOKUP STAND	
9000		Hook-Up Stand For customer use.	529.00
		OPERATOR'S MANUAL AND DECALS	
9200		French Operator's Manual and Decal Kit	No Added Cost
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP950960B	Miscellaneous French OM & Decal Kit Post Hole Diggers Destination of Quebec only. Includes French safety decals and manul.	0.00
	BLV11200	John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the compatibility. One implement driveline yoke bundle is needed per implement, and remains with implement at all times (field install required).	275.00
	5BP0099154	Post Hole Digger Down Force Kit PHD200	814.00
	5BP480099851	Post Hole Digger Hookup Stand For customer use.	548.91

PHD200 Post Hole Digger Up to 40HP Category I Hitch Continued				
THIS PAGE INTENTIONALLY LEFT BLANK				

**List Price** 

### FRONTIER PRODUCTS

### Landscaping

### PHD300 Post Hole Digger Up to 50HP Category I & II Hitch

Equipment for Base Machine

Boom OD: 3-1/2 In. Reinforced Yoke OD: 2-7/8 In. Reinforced Auger Speed: 154 RPM Gearbox Gear Ratio: 3.5:1 Gearbox HP Rating: 50 HP PTO HP Range: 18-50 HP 3-Point Hitch Category: Category I or II Works with Auger Model Numbers: PHA106, PHA109, PHA112, PHA118, PHA124, PHA132

Weight: 230 lbs. Shipping Weight (2 per Crate): 550 lbs. Set-Up Time: 20 Minutes

Code	Attachment Identifier	Description	Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1223XF		PHD300 Post Hole Digger Up to 50HP Category I & II Hitch Order in multiples of two.	1,651.00
		POST HOLE DIGGER DOWN FORCE KIT	
9010		Post Hole Digger Down Force Kit For PHD300 and PHD400	807.00
		HOOKUP STAND	
9000		Hook-Up Stand For customer use.	529.00
		POST HOLE DIGGER AUGER POSITIONING HANDLE	
9020		Post Hole Digger Auger Positioning Handle	190.00
		OPERATOR'S MANUAL AND DECALS	
9200		French Operator's Manual and Decal Kit	No Added Cost
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP950960B	Miscellaneous French OM & Decal Kit Post Hole Diggers Destination of Quebec only. Includes French safety decals and manul.	0.00
	BLV11200	John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the compatibility. One implement driveline yoke bundle is needed per implement, and remains with implement at all times (field install required).	275.00
	5BP48PHD003	Post Hole Digger Auger Positioning Handle	196.91
	5BP0099155	Post Hole Digger Down Force Kit (PHD300 & PHD400)	837.11

# PHD300 Post Hole Digger Up to 50HP Category I & II Hitch Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
	5BP480099851	ATTACHMENTS FOR FIELD CONVERSIONContinued Post Hole Digger Hookup Stand For customer use.	548.91

**List Price** 

### FRONTIER PRODUCTS

### Landscaping

### PHD400 Post Hole Digger Up to 90HP Category I & II Hitch

Equipment for Base Machine

Boom OD: 3-1/2 In. Reinforced Yoke OD: 2-7/8 In. Reinforced Auger Speed: 135 RPM Gearbox Gear Ratio: 4:1 Gearbox HP Rating: 90 HP PTO HP Range: 40-90 HP 3-Point Hitch Category: Category I or II Works with Auger Model Numbers: PHA106, PHA109, PHA112, PHA118, PHA124, PHA132

Weight: 260 lbs. Shipping Weight (2 per Crate): 610 lbs. Set-Up Time: 20 Minutes

Code	Attachment Identifier	Description	Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1224XF		PHD400 Post Hole Digger Up to 90HP Category I & II Hitch Order in multiples of two.	2,000.00
		POST HOLE DIGGER DOWN FORCE KIT	
9010		Post Hole Digger Down Force Kit For PHD300 and PHD400	807.00
		HOOKUP STAND	
9000		Hook-Up Stand For customer use.	529.00
		POST HOLE DIGGER AUGER POSITIONING HANDLE	
9020		Post Hole Digger Auger Positioning Handle	190.00
		OPERATOR'S MANUAL AND DECALS	
9200		French Operator's Manual and Decal Kit	No Added Cost
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP950960B	Miscellaneous French OM & Decal Kit Post Hole Diggers Destination of Quebec only. Includes French safety decals and manul.	0.00
	BLV11200	John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the compatibility. One implement driveline yoke bundle is needed per implement, and remains with implement at all times (field install required).	275.00
	5BP48PHD003	Post Hole Digger Auger Positioning Handle	196.91
	5BP0099155	Post Hole Digger Down Force Kit (PHD300 & PHD400)	837.11

# PHD400 Post Hole Digger Up to 90HP Category I & II Hitch Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
	5BP480099851	ATTACHMENTS FOR FIELD CONVERSIONContinued Post Hole Digger Hookup Stand For customer use.	548.91

1231XF

### FRONTIER PRODUCTS

### Landscaping

### **PR1148 - 48 In. Power Rake**

**Equipment for Base Machine** 

Function: Landscaping and Site Development Hitch Compatibility: Category I and iMatch Compatible Rotor: Cylindrical with Welded Carbide Teeth
Carbide Teeth per Rotor: 76
Depth Control: Dual Independently Adjustable Gauge Wheels
Gauge Wheel Description: 13 x 5.00-6 Gauge Wheel Height Adjustment: Manual Split Clamp Angle Adjustment: Hydraulic Hydraulic Cylinder Manufacturer: Best Metal Ind.
Hydraulic Cylinder Description: 1.50 In. Hydraulic Cylinder Description: 1.5

Bore 0.75 In. Rod 6.00 In. Stroke
Working Angles R or L: 0-15 Degrees
Height: 34 In.
Transport Width: 54 In. Working Width: 48 In.
Working Width at Maximum Angle: 46 In. Roll-Back Barrier Range: 5/16 In. to 3-3/16 In. Length: 54 In. Side Drive: Chain ASA 50-2 Chain Case Lube: Cenex 365 #00 Fluid grease Tubing Size: 3 In. x 3 In.

Tubing Wall Thickness: 3/16 In. Tractor PTO Speed (RPM): 540 Driveline Manufacturer: Weasler Primary Driveline Description: 14R with Cut-out Clutch Secondary Driveline Description: 1-3/8 In. - 6 Splines Direct to Chain Case Clutch/Torque Setting (Number): 316 Tractor PTO HP Requirements Minimum-Maximum: 15-22 HP Tractor Hydraulic Requirements: 1500 PSI Gearbox Manufacturer: Weasler Gearbox Description: Straight Bevel Gear in Oil Bath Gearbox Oil Recommendation: 85-90W Gearbox Reduction: 2:1 Rotor Speed (RPM): 285 Rotor Direction of Rotation: Against DOT Approximate Operating Weight: 500 lbs. Approximate Shipping Weight: 700 lbs. Parking Stand: Standard Approximate Set-Up Time: 20 Minutes Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	

Attachment Information is not available in MOCI for the base code 1231XF

PR1148 - 48 In. Power Rake

10,448.00

### Grounds Equipment - Bid #ESCNJ 18/19-25

### Landscaping

PR1148 -	48	ln.	<b>Power</b>	Rake
	Co	ntinu	ued	

THIS PAGE INTENTIONALLY LEFT BLANK

Liet Dries

### FRONTIER PRODUCTS

### Landscaping

### **PR1160 - 60 In. Power Rake**

**Equipment for Base Machine** 

Function: Landscaping and Site Development Hitch Compatibility: Category I and iMatch Compatible Rotor: Cylindrical with Welded Carbide Teeth
Carbide Teeth per Rotor: 88
Depth Control: Dual Independently Adjustable Gauge Wheels
Gauge Wheel Description: 13 X 5.00-6 Gauge Wheel Height Adjustment: Manual Split Clamp Angle Adjustment: Hydraulic Hydraulic Cylinder Manufacturer: Best Metal Ind.
Hydraulic Cylinder Description: 1.50 In. Hydraulic Cylinder Description: 1.5 Bore 0.75 In. Rod 6.00 In. Stroke Working Angles R or L: 0-15 Degrees Height: 36 In. Transport Width: 64 In. Working Width: 56 In.
Working Width at Maximum Angle: 54 In. Working Width at Maximum Ar Roll-Back Barrier Range: 5/16 In. to 3-3/16 In. Length: 55 In. Side Drive: Chain ASA 50-2 Chain Case Lube: Cenex 365 #00 Fluid Grease Tubing Size: 3 In. x 3 In.

Tubing Wall Thickness: 3/16 In.

Tractor PTO Speed (RPM): 540 Driveline Manufacturer: Weasler Primary Driveline Description: 14R Secondary Driveline Description: 1-3/8 In. 6 Splines to Chain Case with Friction Clutch Clutch/Torque Setting (Number): 508 Tractor PTO HP Requirements Minimum-Maximum: 18-35 HP Tractor Hydraulic Requirements: 1500 PSI Gearbox Manufacturer: Superior Gearbox Description: Straight Bevel Gear in Oil Bath Gearbox Oil Recommendation: 85-90W Gearbox Reduction: 2:1 Rotor Speed (RPM): 285 Rotor Direction of Rotation: Against DOT Approximate Operating Weight: 550 lbs. Approximate Shipping Weight: 750 lbs. Parking Stand: Standard Approximate Set-Up Time: 20 Minutes Warranty: 1 Year

Code	Attachment Identifier	Description	Suggested USD (\$)
		Select One Code From Each Required Category	

### **BASE MACHINE**

1232XF PR1160 - 60 In. Power Rake 11,109.00

Attachment Information is not available in MOCI for the base code 1232XF

# PR1160 - 60 In. Power Rake Continued

### THIS PAGE INTENTIONALLY LEFT BLANK

1233XF

### FRONTIER PRODUCTS

### Landscaping

### **PR1172 - 72 In. Power Rake**

**Equipment for Base Machine** 

Function: Landscaping and Site Development Hitch Compatibility: Category I and iMatch Compatible Rotor: Cylindrical with Welded Carbide Teeth Carbide Teeth per Rotor: 114 Depth Control: Dual Independently Adjustable Gauge Wheels Gauge Wheel Description: 16.5 x 6.5-8 Gauge Wheel Height Adjustment: Manual Split Clamp Angle Adjustment: Hydraulic Hydraulic Cylinder Manufacturer: Best Metal Ind. Hydraulic Cylinder Description: 1.50 In. Bore 0.75 In. Rod 8.00 In. Stroke Working Angles R or L: 0-15 Degrees Height: 40 In. Transport Width: 81 In. Working Width: 72 In. Working Width at Maximum Angle: 69.5 In. Roll-Back Barrier Range: 5/16 In. to 2-15/16 In. Length: 62 In. Side Drive: Chain ASA 60-2 Chain Case Lube: Cenex 365 #00 Fluid Grease Tubing Size: 3 In. x 3 In.

Tubing Wall Thickness: 1/4 In. Tractor PTO Speed (RPM): 540 Driveline Manufacturer: Weasler Primary Driveline Description: 14R Secondary Driveline Description: 35R with Friction Clutch Clutch/Torque Setting (Number): 1016
Tractor PTO HP Requirements Minimum-Maximum: 30-40 HP Tractor Hydraulic Requirements: 1500 PSI Gearbox Manufacturer: Superior Gearbox Description: Straight Bevel Gear in Oil Bath Gearbox Oil Recommendation: 85-90W Gearbox Reduction: 2:1 Rotor Speed (RPM): 270 Rotor Speed (RPM): 270
Rotor Direction of Rotation: Against DOT Approximate Operating Weight: 830 lbs. Approximate Shipping Weight: 1100 lbs. Parking Stand: Standard Approximate Set-Up Time: 45 Minutes Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	]
		BASE MACHINE	

Attachment Information is not available in MOCI for the base code 1233XF

PR1172 - 72 In. Power Rake

12,361.00

	PR1172 - 72 In. Po		
THIS F	PAGE INTENTIONA	LLY LEFT BLANK	

### FRONTIER PRODUCTS

### Landscaping

### **PR1184 - 84 In. Power Rake**

**Equipment for Base Machine** 

Function: Landscaping and Site Development Hitch Compatibility: Category I, Category II, iMatch, Quick Coupler Compatible Rotor: Cylindrical with Welded Carbide Teeth Carbide Teeth per Rotor: 132 Depth Control: Dual Independently Adjustable Gauge Wheels Gauge Wheel Description:  $16.5 \times 6.5-8$ Gauge Wheel Height Adjustment: Manual Split Clamp Angle Adjustment: Hydraulic Hydraulic Cylinder Manufacturer: Best Metal Ind. Hydraulic Cylinder Description: 2.00 In. Bore 1.25 In. rod 8.00 In. Stroke Working Angles R or L: 0-15 Degrees Height: 44 In.
Transport Width: 93 In. Working Width: 84 In. Working Width at Maximum Angle: 81 In. Roll-Back Barrier Range: 5/16 In. to 4-11/16 In. Length: 70 In. Side Drive: Chain ASA 60-2H Chain Case Lube: Cenex 365 #00 Fluid Grease Tubing Size: 4 In. x 4 In.

Tubing Wall Thickness: 5/16 In. Tractor PTO Speed (RPM): 540 Driveline Manufacturer: Weasler Primary Driveline Description: 35E Secondary Driveline Description: 44E with Friction Clutch (1-3/4 In. 20 Splines) Clutch/Torque Setting (Number): 1695 Tractor PTO HP Requirements Minimum-Maximum: 42-80 HP Tractor Hydraulic Requirements: 1500 PSI Gearbox Manufacturer: Superior Gearbox Description: Straight Bevel Gear in Oil Bath Gearbox Oil Recommendation: 85-90W Gearbox Reduction: 2:1 Rotor Speed (RPM): 270 Rotor Direction of Rotation: Against DOT Approximate Operating Weight: 1260 lbs. Approximate Shipping Weight: 1700 lbs. Parking Stand: Standard Approximate Set-Up Time: 60 Minutes Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)	

Select One Code From Each Required Category

### **BASE MACHINE**

1234XF PR1184 - 84 In. Power Rake 16,151.00

Attachment Information is not available in MOCI for the base code 1234XF

### PR1184 - 84 In. Power Rake Continued

THIS	S PA	AGF.	INTFI	NTIC	DNALLY	I FFT	BLANK	(
1 1 11		<b>'</b>						•

### FRONTIER PRODUCTS

### Landscaping

### RB2060 - 5 Ft. Standard Duty Rear Blade

**Equipment for Base Machine** 

3-Point Hitch: Category I
Working Width: 60 In.
Operational Weight: 249 lbs.
Tractor HP: 19 to 45 HP
Tilt Positions: Three
Offset: 12 In. Left or Right
Shipping Weight:
588 lbs. for Quantity 2
Pivot: 360 Degrees
Parking Stand: Standard
Packaged 2 Per Crate
Moldboard Height: 14 In.
Moldboard Length: 60 In.
Moldboard Thickness: 3/16 In.
Duty: Standard Duty

Cutting Edge:
1/2 In. x 6 In. Reversible
Assembly/Set-Up Time: 15 Minutes
Angle - Forward:
0, 15 and 30 Degrees Each Side
Angle - Reverse:
0 and 15 Degrees Each Side
Skid Shoes: Optional

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	]
		BASE MACHINE	
1281XF		RB2060 - 5 Ft. Standard Duty Rear Blade Order in multiples of two.	838.00
		OPERATOR'S MANUAL AND DECALS	
9200		French Operator's Manual and Decal Kit (RB20 Series)	53.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5WS346765	<b>Miscellaneous</b> End Plate Kit (RB2060, RB2072 and RB2084)	176.00
	5WS101376	French Operator's Manual and Decal Kit (RB20 and RB20L Series)	55.00
	5WS346745	Skid Shoes Kit (RB2060, RB2072 and RB2084)	269.51



### FRONTIER PRODUCTS

### Landscaping

### RB2060L - 5 Ft. Rear Blade - Limited Category I

**Equipment for Base Machine** 

Cutting Edge:
1/2 In. x 6 In. Reversible
Angle Pivot: 360 Degrees
Angle - Forward:
0, 15 and 30 Degrees Each Side
Angle - Reverse:
0, 15 and 30 Degrees Each Side
Moldboard Thickness: 7 Gauge
Moldboard Length: 60 In.
Moldboard Height: 11 In.
Tractor HP (Maximum): 25 HP
3-Point Hitch:
Limited Category I (Aftermarket
Category 0 Lift Pins Available)

Parking Stand - Standard Skid Shoe Bundle: Optional Operating Weight: 155 lbs. Shipping Weight: 402 lbs. (Quantity of 2) Packaged Two Per Crate Assembly/Set-Up Time: 30 Minutes Warranty: 1 Year

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1291XF		RB2060L - 5 Ft. Rear Blade - Limited Category I  Order in multiples of two.	620.00
		OPERATOR'S MANUAL AND DECALS	
9200		French Operator's Manual and Decal Kit (RB20 Series)	53.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5WS101376	Miscellaneous French Operator's Manual and Decal Kit (RB20 and RB20L Series)	55.00
	5WS343435	Skid Shoes Kit (RB2060L)	62.71

Landscaping

RB2060L - 5 Ft. Rear Blade - Limited Category I Continued						

THIS PAGE INTENTIONALLY LEFT BLANK

### FRONTIER PRODUCTS

### Landscaping

### RB2072 - 6 Ft. Standard Duty Rear Blade

**Equipment for Base Machine** 

3-Point Hitch: Category I
Shipping Weight:
660 lbs. (Quantity 2)
Moldboard Height: 14 In.
Moldboard Length: 72 In.
Moldboard Thickness: 1/4 In.
Duty: Standard Duty
Cutting Edge:
1/2 In. x 6 In. Reversible
Angle: 360 Degrees
Angle - Reverse:
0 and 15 Degrees Each Side
Approximate Operating Weight: 285 lb.
Offset: 12 In. Left or Right

Tractor HP: 23 to 55 HP
Tilt: 3-Positions
Angle - Forward:
0, 15, and 30 Degrees Each Side
Skid Shoe Bundle: Optional
End Plate Bundle: Optional
Assembly/Set-Up Time:
15 Minutes (Approximate)

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1282XF		RB2072 - 6 Ft. Standard Duty Rear Blade Order in multiples of two.	908.00
		OPERATOR'S MANUAL AND DECALS	
9200		French Operator's Manual and Decal Kit (RB20 Series)	53.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5WS346765	<b>Miscellaneous</b> End Plate Kit (RB2060, RB2072 and RB2084)	176.00
	5WS101376	French Operator's Manual and Decal Kit (RB20 and RB20L Series)	55.00
	5WS346745	Skid Shoes Kit (RB2060, RB2072 and RB2084)	269.51



### RB2084 - 7 Ft. Standard Duty Rear Blade

**Equipment for Base Machine** 

3-Point Hitch: Category I Tractor HP: 27 to 55 HP Tilt: 3 Position Shipping Weight: 700 lbs. (Quantity 2) Offset: 12 Inches, Left or Right Moldboard Thickness: 1/4 In. Moldboard Length: 84 In. Moldboard Height: 14 In. Duty: Standard Duty
Cutting Edge:
1/2 In. x 6 In. Reversible
Approximate Operating Weight: 305 lbs.
Angle: 360 Degrees

Angle - Reverse: 0 and 15 Degrees Each Side O and 15 Degrees Each Side
Angle - Forward:
O, 15, and 30 Degrees Each Side
Skid Shoe Bundle: Optional
End Plate Bundle: Optional
Assembly/Set-Up Time:
15 Minutes (Approximate)

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1283XF		RB2084 - 7 Ft. Standard Duty Rear Blade Order in multiples of two.	1,015.00
		OPERATOR'S MANUAL AND DECALS	
9200		French Operator's Manual and Decal Kit (RB20 Series)	53.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5WS346765	Miscellaneous End Plate Kit (RB2060, RB2072 and RB2084)	176.00
	5WS101376	French Operator's Manual and Decal Kit (RB20 and RB20L Series)	55.00
	5WS346745	Skid Shoes Kit (RB2060, RB2072 and RB2084)	269.51



TΙ	ΗІ	S	PA	GE	INT	ΕN	TIC	DNALL	Y LEF	ТΒІ	LAN	K

### FRONTIER PRODUCTS

### Landscaping

### RB2160 - 5 Ft. Medium Duty Rear Blade

**Equipment for Base Machine** 

Hitch: 3-Point Category I and iMatch
Working Width: 60 In.
Working Weight: 392 lbs.
Tractor HP:
65 HP (Maximum - 2WD)
60 HP (Maximum - 4WD)
Tilt: 3 Positions,
Up to 22 degrees Up or Down
Shipping Weight: 426 lbs.
Angle/Pivot: 360 Degrees
Moldboard Height: 17 In.
Moldboard Thickness: 1/4 In.
Duty: Medium Duty
Cutting Edge:
1/2 In. x 6 In. Reversible

Assembly/Set-Up Time: 60 Minutes
Angle - Forward:
3 Positions, Up to 53 Degrees Each Side
Angle - Reverse:
3 Positions, Up to 53 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Offset: 6 In. or 12 In. Left or Right

Code	Attachment Identifier	Description	List Price Suggested USD (\$)

Select One Code From Each Required Category

### **BASE MACHINE**

1301XF RB2160 - 5 Ft. Medium Duty Rear Blade 1,288.00

### ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous

5TMC6200001 End Plates - Pair (RB21 Series) 114.40

5TMC6100001 Skid Shoes - Pair (RB21 Series) 126.51

RB2160 - 5 Ft. Medium Duty Rear Blade Continued
Continued
THIS PAGE INTENTIONALLY LEFT BLANK

**List Price** 

#### FRONTIER PRODUCTS

#### Landscaping

#### RB2172 - 6 Ft. Medium Duty Rear Blade

**Equipment for Base Machine** 

Hitch: 3-Point Category I and iMatch
Working Width: 72 In.
Working Weight: 422 lbs.
Tractor HP:
65 HP (Maximum - 2WD)
60 HP (Maximum - 4WD)
Tilt: 3 Positions,
Up to 22 degrees Up or Down
Shipping Weight: 456 lbs.
Angle/Pivot: 360 Degrees
Moldboard Height: 17 In.
Moldboard Thickness: 1/4 In.
Duty: Medium Duty
Cutting Edge:
1/2 In. x 6 In. Reversible

Assembly/Set-Up Time: 60 Minutes
Angle - Forward:
3 Positions, Up to 53 Degrees Each Side
Angle - Reverse:
3 Positions, Up to 53 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Offset: 6 In. or 12 In. Left or Right

Code	Attachment Identifier	Description	Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1302XF		RB2172 - 6 Ft. Medium Duty Rear Blade	1,365.00


#### ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous

5TMC6200001 End Plates - Pair (RB21 Series) 114.40

5TMC6100001 Skid Shoes - Pair (RB21 Series) 126.51

Landscaping

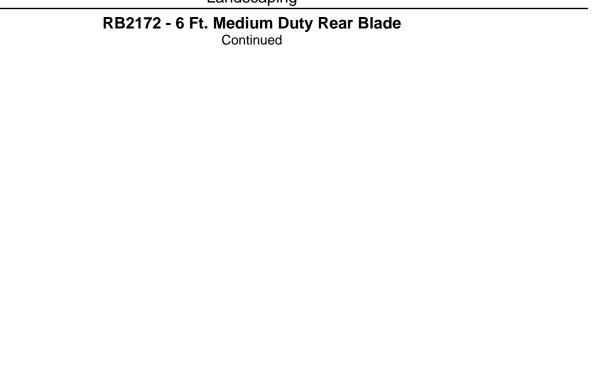

THIS PAGE INTENTIONALLY LEFT BLANK

#### Landscaping

#### RB2184 - 7 Ft. Medium Duty Rear Blade

**Equipment for Base Machine** 

Hitch: 3-Point Category I and iMatch
Working Width: 84 In.
Working Weight: 448 lbs.
Tractor HP:
65 HP (Maximum - 2WD)
60 HP (Maximum - 4WD)
Tilt: 3 Positions,
Up to 22 degrees Up or Down
Shipping Weight: 482 lbs.
Angle/Pivot: 360 Degrees
Moldboard Height: 17 In.
Moldboard Thickness: 1/4 In.
Duty: Medium Duty
Cutting Edge:
1/2 In. x 6 In. Reversible

Assembly/Set-Up Time: 60 Minutes Angle - Forward: 3 Positions, Up to 53 Degrees Each Side Angle - Reverse: 3 Positions, Up to 53 Degrees Each Side Skid Shoes (Pair): Optional End Plates (Pair): Optional Parking Stand: Standard Offset - 6 In. or 12 In. Left or Right

Code	Attachment Identifier	Description	List Price Suggested USD (\$)

Select One Code From Each Required Category

#### **BASE MACHINE**

1303XF RB2184 - 7 Ft. Medium Duty Rear Blade 1,447.00


#### ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous

5TMC6200001 End Plates - Pair (RB21 Series) 114.40

5TMC6100001 Skid Shoes - Pair (RB21 Series) 126.51

Landscaping

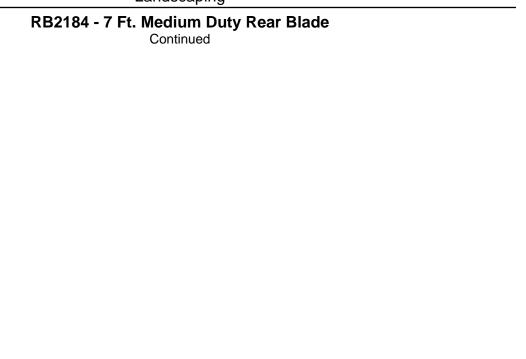

THIS PAGE INTENTIONALLY LEFT BLANK

#### Landscaping

#### RB2196 - 8 Ft. Medium Duty Rear Blade

**Equipment for Base Machine** 

Hitch: 3-Point Category I and iMatch
Working Width: 96 In.
Working Weight: 476 lbs.
Tractor HP:
65 HP (Maximum - 2WD)
60 HP (Maximum - 4WD)
Tilt: 3 Positions,
Up to 22 degrees Up or Down
Shipping Weight: 510 lbs.
Angle/Pivot: 360 Degrees
Moldboard Height: 17 In.
Moldboard Thickness: 1/4 In.
Duty: Medium Duty
Cutting Edge:
1/2 In. x 6 In. Reversible

Assembly/Set-Up Time: 60 Minutes Angle - Forward: 3 Positions, Up to 53 Degrees Each Side Angle - Reverse: 3 Positions, Up to 53 Degrees Each Side Skid Shoes (Pair): Optional End Plates (Pair): Optional Parking Stand: Standard Offset - 6 In. or 12 In. Left or Right

Co	Attachm de Identifie	List Pric Suggeste USD (\$	t

Select One Code From Each Required Category

#### **BASE MACHINE**

1304XF RB2196 - 8 Ft. Medium Duty Rear Blade 1,512.00

#### ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous

5TMC6200001 End Plates - Pair (RB21 Series) 114.40

5TMC6100001 Skid Shoes - Pair (RB21 Series) 126.51

Landscaping



THIS PAGE INTENTIONALLY LEFT BLANI	TΗ	IS	PAGE	INTE	NTION	IALLY	LEFT	BLAN	K
------------------------------------	----	----	------	------	-------	-------	------	------	---

#### Landscaping

### RB2160H - 5 Ft. Medium Duty Hydraulic Rear Blade

**Equipment for Base Machine** 

Hitch: 3-Point Category I and iMatch
Working Width: 60 in. (1,524 mm)
Working Weight: 379 lbs. (171.9 kg)
Tractor HP:
50 HP (37.3 kW) (Maximum - 2WD)
45 HP (33.6 kW) (Maximum - 4WD)
Tilt: 3 Positions,
Up to 20 degrees Up or Down
Shipping Weight: 459 lbs. (208.2 kg)
Angle/Pivot: 360 Degrees
Moldboard Height: 15 in. (381 mm)
Moldboard Thickness: 1/4 in. 6.35 mm)
Duty: Medium Duty
Cutting Edge:
1/2 x 6 in. Reversible (12.7 x 152.4 mm)

Assembly/Set-Up Time: 60 Minutes
Angle - Forward:
Hydraulic, Up to 40 Degrees Each Side
Angle - Reverse:
Hydraulic, Up to 40 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Offset: 6 in. or 12 in. Left or Right (152.4 mm or 304.8 mm)

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1551XF		RB2160H - 5 Ft. Medium Duty Hydraulic Rear Blade Includes one cylinder.	1,723.00
		END PLATES	
9010		End Plates (Pair)	86.00
0000		SKID SHOES	90.00
9000		Skid Shoes (Pair)  ATTACHMENTS FOR FIELD CONVERSION	89.00
	5TMKMCN021	Miscellaneous End Plates (Pair)	89.11
	5TMKHCN101	Hydraulic Cylinder Kit Includes one cylinder.	711.71
	5TMKMCN022	Skid Shoes (Pair)	92.40

Landscaping

### RB2160H - 5 Ft. Medium Duty Hydraulic Rear Blade Continued

THIS PAGE INTENTIONALLY LEFT BLANK

#### Landscaping

#### RB2172H - 6 Ft. Medium Duty Hydraulic Rear Blade

**Equipment for Base Machine** 

Hitch: 3-Point Category I and iMatch
Working Width: 72 in. (1,828.8 mm)
Working Weight: 405 lbs. (183.7 kg)
Tractor HP:
50 HP (37.3 kW) (Maximum - 2WD)
45 HP (33.6 kW) (Maximum - 4WD)
Tilt: 3 Positions,
Up to 20 degrees Up or Down
Shipping Weight: 489 lbs. (221.8 kg)
Angle/Pivot: 360 Degrees
Moldboard Height: 15 in. (381 mm)
Moldboard Thickness: 1/4 in. 6.35 mm)
Duty: Medium Duty
Cutting Edge:
1/2 x 6 in. Reversible (12.7 x 152.4 mm)

Assembly/Set-Up Time: 60 Minutes
Angle - Forward:
Hydraulic, Up to 40 Degrees Each Side
Angle - Reverse:
Hydraulic, Up to 40 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Offset: 6 in. or 12 in. Left or Right (152.4 mm or 304.8 mm)

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	]
		BASE MACHINE	
1552XF		RB2172H - 6 Ft. Medium Duty Hydraulic Rear Blade Includes one cylinder.	1,847.00
		END PLATES	
9010		End Plates (Pair)	86.00
		SKID SHOES	
9000		Skid Shoes (Pair)	89.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5TMKMCN021	Miscellaneous End Plates (Pair)	89.11
	5TMKHCN101	Hydraulic Cylinder Kit Includes one cylinder.	711.71
	5TMKMCN022	Skid Shoes (Pair)	92.40

Landscaping

### RB2172H - 6 Ft. Medium Duty Hydraulic Rear Blade Continued

THIS PAGE INTENTIONALLY LEFT BLANK

#### Landscaping

#### RB2184H - 7 Ft. Medium Duty Hydraulic Rear Blade

**Equipment for Base Machine** 

Hitch: 3-Point Category I and iMatch
Working Width: 84 in. (2,133.6 mm)
Working Weight: 431 lbs. (195.5 kg)
Tractor HP:
50 HP (37.3 kW) (Maximum - 2WD)
45 HP (33.6 kW) (Maximum - 4WD)
Tilt: 3 Positions,
Up to 20 degrees Up or Down
Shipping Weight: 515 lbs. (233.6 kg)
Angle/Pivot: 360 Degrees
Moldboard Height: 15 in. (381 mm)
Moldboard Thickness: 1/4 in. 6.35 mm)
Duty: Medium Duty
Cutting Edge:
1/2 x 6 in. Reversible (12.7 x 152.4 mm)

Assembly/Set-Up Time: 60 Minutes
Angle - Forward:
Hydraulic, Up to 40 Degrees Each Side
Angle - Reverse:
Hydraulic, Up to 40 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Offset: 6 in. or 12 in. Left or Right (152.4 mm or 304.8 mm)

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	1
		BASE MACHINE	
1553XF		RB2184H - 7 Ft. Medium Duty Hydraulic Rear Blade Includes one cylinder.	1,927.00
		END PLATES	
9010		End Plates (Pair)	86.00
		SKID SHOES	
9000		Skid Shoes (Pair)	89.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5TMKMCN021	Miscellaneous End Plates (Pair)	89.11
	5TMKHCN101	Hydraulic Cylinder Kit Includes one cylinder.	711.71
	5TMKMCN022	Skid Shoes (Pair)	92.40

Landscaping

## RB2184H - 7 Ft. Medium Duty Hydraulic Rear Blade Continued

THIS PAGE INTENTIONALLY LEFT BLANK

#### Landscaping

### RB2196H - 8Ft. Medium Duty Hydraulic Rear Blade

**Equipment for Base Machine** 

Hitch: 3-Point Category I and iMatch
Working Width: 96 in. (2,438.4 mm)
Working Weight: 456 lbs. (206.8 kg)
Tractor HP:
50 HP (37.3 kW) (Maximum - 2WD)
45 HP (33.6 kW) (Maximum - 4WD)
Tilt: 3 Positions,
Up to 20 degrees Up or Down
Shipping Weight: 543 lbs. (246.3 kg)
Angle/Pivot: 360 Degrees
Moldboard Height: 15 in. (381 mm)
Moldboard Thickness: 1/4 in. 6.35 mm)
Duty: Medium Duty
Cutting Edge:
1/2 x 6 in. Reversible (12.7 x 152.4 mm)

Assembly/Set-Up Time: 60 Minutes
Angle - Forward:
Hydraulic, Up to 40 Degrees Each Side
Angle - Reverse:
Hydraulic, Up to 40 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Offset: 6 in. or 12 in. Left or Right (152.4 mm or 304.8 mm)

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	]
		BASE MACHINE	
1554XF		RB2196H - 8Ft. Medium Duty Hydraulic Rear Blade Includes one cylinder.	2,048.00
		END PLATES	
9010		End Plates (Pair)	86.00
		SKID SHOES	
9000		Skid Shoes (Pair)	89.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5TMKMCN021	<b>Miscellaneous</b> End Plates (Pair)	89.11
	5TMKHCN101	Hydraulic Cylinder Kit Includes one cylinder.	711.71
	5TMKMCN022	Skid Shoes (Pair)	92.40

Landscaping

RB2196H - 8Ft. Medium Duty Hydraulic Rear Bl	ade
Continued	

THIS PAGE INTENTIONALLY LEFT BLANI	TΗ	IS	PAGE	INTE	NTION	IALLY	LEFT	BLAN	K
------------------------------------	----	----	------	------	-------	-------	------	------	---

#### Landscaping

#### RB2272 - 6 Ft. Medium Plus Rear Blade

**Equipment for Base Machine** 

Hitch:
3 Point Category II and
ASAE Category II Quick Coupler
Tractor HP:
80 HP (Maximum - 2WD)
70 HP (Maximum - 4WD)
Shipping Weight: 795 lbs.
Moldboard Height: 19 In.
Duty: Medium Plus Duty
Assembly/Set-Up Time: 120 Minutes
Cutting Edge:
1/2 In. x 6 In. Reversible
Angle/Pivot: 360 Degrees
Moldboard Thickness: 1/4 In.
Moldboard Length: 72 In.
Approximate Operating Weight: 738 lb.
Offset: 9 In. or 18 In. Left or Right

5TMC6100002


Skid Shoes - Pair

Tilt: 3 Positions,
Up to 23 Degrees, Up or Down
Angle-Forward:
3 Positions, Up to 45 Degrees Each Side
Angle-Reverse:
3 Positions, Up to 45 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Hydraulic Offset Kit:
Optional (Hoses and Fittings Included)
Parking Stand: Standard

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1311XF		BASE MACHINE  RB2272 - 6 Ft. Medium Plus Rear Blade	2,621.00
101174		ATTACHMENTS FOR FIELD CONVERSION	2,021.00
	5TMC6200003	Miscellaneous End Plates - Pair	160.60
	5TMC6300073	Hydraulic Cylinder Kit Offset or Tilt - Includes 1 Cylinder (RB23 Series).	628.11

150.71

Landscaping

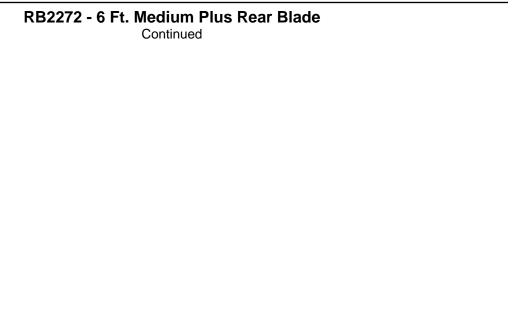

THIS PAGE INTENTIONALLY LEFT BLANK

#### Landscaping

#### RB2284 - 7 Ft. Medium Plus Rear Blade

**Equipment for Base Machine** 

Hitch:
3 Point Category II and
ASAE Category II Quick Coupler
Tractor HP:
80 HP (Maximum - 2WD)
70 HP (Maximum - 4WD)
Shipping Weight: 812 lbs.
Moldboard Height: 19 In.
Duty: Medium Plus Duty
Assembly/Set-Up Time: 120 Minutes
Cutting Edge:
1/2 In. x 6 In. Reversible
Angle/Pivot: 360 Degrees
Moldboard Thickness: 1/4 In.
Moldboard Length: 84 In.
Approximate Operating Weight: 755 lbs.
Offset: 9 In. or 18 In. Left or Right

Tilt: 3 Positions,
Up to 23 Degrees, Up or Down
Angle-Forward:
3 Positions, Up to 45 Degrees Each Side
Angle-Reverse:
3 Positions, Up to 45 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Hydraulic Offset Kit:
Optional (Hoses and Fittings Included)
Parking Stand: Standard

Code	Attachment Identifier	Description	Sugge	Price ested SD (\$)

### Select One Code From Each Required Category


#### **BASE MACHINE**

1312XF	RB2284 - 7 Ft. Medium Plus Rear Blade	2 834 00

#### ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous<br/>End Plates - Pair160.605TMC6300073Hydraulic Cylinder Kit<br/>Offset or Tilt - Includes 1 Cylinder (RB23 Series).628.115TMC6100002Skid Shoes - Pair150.71

Landscaping

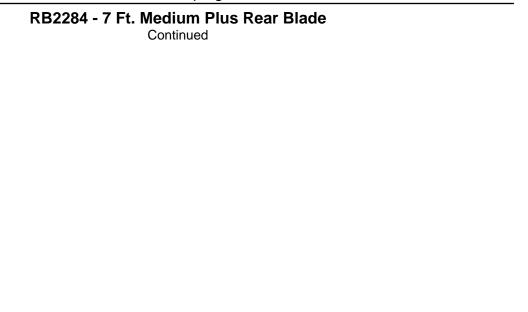

THIS PAGE INTENTIONALLY LEFT BLANK

List Price

628.11

150.71

#### FRONTIER PRODUCTS

#### Landscaping

#### RB2296 - 8 Ft. Medium Plus Rear Blade

**Equipment for Base Machine** 

Hitch:
3 Point Category II and
ASAE Category II Quick Coupler
Tractor HP:
80 HP (Maximum - 2WD)
70 HP (Maximum - 4WD)
Shipping Weight: 829 lbs.
Moldboard Height: 19 In.
Duty: Medium Plus Duty
Assembly/Set-Up Time: 120 Minutes
Cutting Edge:
1/2 In. x 6 In. Reversible
Angle/Pivot: 360 Degrees
Moldboard Thickness: 1/4 In.
Moldboard Length: 96 In.
Approximate Operating Weight: 772 lbs.
Offset: 9 In. or 18 In. Left or Right

5TMC6300073

5TMC6100002

Hydraulic Cylinder Kit

Skid Shoes - Pair

Offset or Tilt - Includes 1 Cylinder (RB23 Series).

Tilt: 3 Positions,
Up to 23 Degrees, Up or Down
Angle-Forward:
3 Positions, Up to 45 Degrees Each Side
Angle-Reverse:
3 Positions, Up to 45 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Hydraulic Offset Kit:
Optional (Hoses and Fittings Included)
Parking Stand: Standard

Code	Attachment Identifier	Description	Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1313XF		RB2296 - 8 Ft. Medium Plus Rear Blade	2,965.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5TMC6200003	Miscellaneous End Plates - Pair	160.60

Landscaping

RB2296 - 8 Ft. Medium Plus Rear Blade Continued
THIS PAGE INTENTIONALLY LEFT BLANK

**List Price** 

#### FRONTIER PRODUCTS

#### Landscaping

#### RB2307 - 7 Ft. Heavy Duty Rear Blade

**Equipment for Base Machine** 

Hitch:

3-Point Category II and
ASAE Category II Quick Coupler
Tractor HP:

120 HP (Maximum - 2WD)
110 HP (Maximum - 4WD)
Tilt: 3 Positions,
Up to 23 Degrees Up or Down
Shipping Weight: 1117 lbs.
Offset: 9 In. or 18 In. Left or Right
Moldboard Thickness: 5/16 In.
Moldboard Length: 84 In.
Moldboard Height: 19 In.
Duty: Heavy Duty
Cutting Edge:

1/2 In. x 6 In. Reversible
Approximate Operating Weight: 1060 lbs.
Assembly/Set-Up Time:

120 Minutes (Approximate)
Angle: 360 Degrees
Angle - Forward:
3 Positions, Up to 45 Degrees Each Side
Angle - Reverse:
3 Positions, Up to 45 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Hydraulic Tilt, Angle and Offset Kits:
Optional (Hoses and Fittings Included)

Code	Attachment Identifier	Description	Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1321XF		RB2307 - 7 Ft. Heavy Duty Rear Blade	3,221.00
		HYDRAULIC KITS	
1000		Manual Kit	In Base Price
1010		Hydraulic Cylinder Kit, Angle - Offset - Tilt <i>Includes 3 cylinders</i> .	1,715.00
		HYDRAULIC KITS	
9020		Hydraulic Diverter Kit	546.00
		END PLATES	
9010		End Plates (Pair)	155.00
		SKID SHOES	
9000		Skid Shoes (Pair)	145.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5TMC6200003	Miscellaneous End Plates - Pair	160.60
	5TMC0040025K	French Operator's Manual and Decal Kit Rear Blades RB2307, RB2308, RB2309 and RB2310.	6.60
	5TMC6300073	Hydraulic Cylinder Kit Offset or Tilt - Includes 1 Cylinder (RB23 Series).	628.11

### Landscaping

### RB2307 - 7 Ft. Heavy Duty Rear Blade

Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
	5TMC6300083	ATTACHMENTS FOR FIELD CONVERSIONContinued Hydraulic Cylinder Kit - Angle - Includes 1 Cylinder (RB23 Series)	643.51
	5TMC6300051	Hydraulic Diverter Kit (RB23 Series)	566.51
	5TMC6100002	Skid Shoes - Pair	150.71

#### Landscaping

#### RB2308 - 8 Ft. Heavy Duty Rear Blade

**Equipment for Base Machine** 

Hitch:

3-Point Category II and
ASAE Category II Quick Coupler
Tractor HP:

120 HP (Maximum - 2WD)
110 HP (Maximum - 4WD)
Tilt: 3 Positions,
Up to 23 Degrees Up or Down
Shipping Weight: 1196 lbs.
Offset: 9 In. or 18 In. Left or Right
Moldboard Thickness: 5/16 In.
Moldboard Length: 96 In.
Moldboard Height: 19 In.
Duty: Heavy Duty
Cutting Edge:
1/2 In. x 6 In. Reversible
Approximate Operating Weight: 1139 lbs.
Assembly/Set-Up Time:

120 Minutes (Approximate)
Angle: 360 Degrees
Angle - Forward:
3 Positions, Up to 45 Degrees Each Side
Angle - Reverse:
3 Positions, Up to 45 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Hydraulic Tilt, Angle and Offset Kits:
Optional (Hoses and Fittings Included)

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1322XF		RB2308 - 8 Ft. Heavy Duty Rear Blade	3,504.00
		HYDRAULIC KITS	
1000		Manual Kit	In Base Price
1010		Hydraulic Cylinder Kit, Angle - Offset - Tilt <i>Includes 3 cylinders</i> .	1,715.00
		HYDRAULIC KITS	
9020		Hydraulic Diverter Kit	546.00
		END PLATES	
9010		End Plates (Pair)	155.00
		SKID SHOES	
9000		Skid Shoes (Pair)	145.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5TMC6200003	Miscellaneous End Plates - Pair	160.60
	5TMC0040025K	French Operator's Manual and Decal Kit Rear Blades RB2307, RB2308, RB2309 and RB2310.	6.60
	5TMC6300073	Hydraulic Cylinder Kit  Office on Tite Includes I Cylinder (BB22 Series)	628.11

Offset or Tilt - Includes 1 Cylinder (RB23 Series).

### Landscaping

### RB2308 - 8 Ft. Heavy Duty Rear Blade

Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
	5TMC6300083	ATTACHMENTS FOR FIELD CONVERSIONContinued Hydraulic Cylinder Kit - Angle - Includes 1 Cylinder (RB23 Series)	643.51
	5TMC6300051	Hydraulic Diverter Kit (RB23 Series)	566.51
	5TMC6100002	Skid Shoes - Pair	150.71

#### Landscaping

#### RB2309 - 9 Ft. Heavy Duty Rear Blade

**Equipment for Base Machine** 

Hitch:

3-Point Category II and
ASAE Category II Quick Coupler
Tractor HP:

120 HP (Maximum - 2WD)
110 HP (Maximum - 4WD)
Tilt: 3 Positions,
Up to 23 Degrees Up or Down
Shipping Weight: 1297 lbs.
Offset: 9 In. or 18 In. Left or Right
Moldboard Thickness: 5/16 In.
Moldboard Length: 108 In.
Moldboard Height: 19 In.
Duty: Heavy Duty
Cutting Edge:
1/2 In. x 6 In. Reversible
Approximate Operating Weight: 1240 lbs.
Assembly/Set-Up Time:

5TMC6300073

Hydraulic Cylinder Kit

Offset or Tilt - Includes 1 Cylinder (RB23 Series).

120 Minutes (Approximate)
Angle: 360 Degrees
Angle - Forward:
3 Positions, Up to 45 Degrees Each Side
Angle - Reverse:
3 Positions, Up to 45 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Hydraulic Tilt, Angle and Offset Kits:
Optional (Hoses and Fittings Included)

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1323XF		RB2309 - 9 Ft. Heavy Duty Rear Blade	3,671.00
		HYDRAULIC KITS	
1000		Manual Kit	In Base Price
1010		Hydraulic Cylinder Kit, Angle - Offset - Tilt <i>Includes 3 cylinders</i> .	1,715.00
		HYDRAULIC KITS	
9020		Hydraulic Diverter Kit	546.00
		END PLATES	
9010		End Plates (Pair)	155.00
		SKID SHOES	
9000		Skid Shoes (Pair)	145.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5TMC6200003	Miscellaneous End Plates - Pair	160.60
	5TMC0040025K	French Operator's Manual and Decal Kit Rear Blades RB2307, RB2308, RB2309 and RB2310.	6.60

628.11

### Landscaping

### RB2309 - 9 Ft. Heavy Duty Rear Blade

Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
	5TMC6300083	ATTACHMENTS FOR FIELD CONVERSIONContinued Hydraulic Cylinder Kit - Angle - Includes 1 Cylinder (RB23 Series)	643.51
	5TMC6300051	Hydraulic Diverter Kit (RB23 Series)	566.51
	5TMC6100002	Skid Shoes - Pair	150.71

#### Landscaping

#### RB2310 - 10 Ft. Heavy Duty Rear Blade

**Equipment for Base Machine** 

Hitch:

3-Point Category II and
ASAE Category II Quick Coupler
Tractor HP:

120 HP (Maximum - 2WD)
110 HP (Maximum - 4WD)
Tilt: 3 Positions,
Up to 23 Degrees Up or Down
Shipping Weight: 1357 lbs.
Offset: 9 In. or 18 In. Left or Right
Moldboard Thickness: 5/16 In.
Moldboard Length: 120 In.
Moldboard Height: 19 In.
Duty: Heavy Duty
Cutting Edge:
1/2 In. x 6 In. Reversible
Approximate Operating Weight: 1300 lbs.
Assembly/Set-Up Time:

5TMC6300073

Hydraulic Cylinder Kit

Offset or Tilt - Includes 1 Cylinder (RB23 Series).

120 Minutes (Approximate)
Angle: 360 Degrees
Angle - Forward:
3 Positions, Up to 45 Degrees Each Side
Angle - Reverse:
3 Positions, Up to 45 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Hydraulic Tilt, Angle and Offset Kits:
Optional (Hoses and Fittings Included)

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1324XF		RB2310 - 10 Ft. Heavy Duty Rear Blade	3,779.00
		HYDRAULIC KITS	
1000		Manual Kit	In Base Price
1010		Hydraulic Cylinder Kit, Angle - Offset - Tilt <i>Includes 3 cylinders</i> .	1,715.00
		HYDRAULIC KITS	
9020		Hydraulic Diverter Kit	546.00
		END PLATES	
9010		End Plates (Pair)	155.00
		SKID SHOES	
9000		Skid Shoes (Pair)	145.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5TMC6200003	Miscellaneous End Plates - Pair	160.60
	5TMC0040025K	French Operator's Manual and Decal Kit Rear Blades RB2307, RB2308, RB2309 and RB2310.	6.60

628.11

### Landscaping

### RB2310 - 10 Ft. Heavy Duty Rear Blade

Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
	5TMC6300083	ATTACHMENTS FOR FIELD CONVERSIONContinued Hydraulic Cylinder Kit - Angle - Includes 1 Cylinder (RB23 Series)	643.51
	5TMC6300051	Hydraulic Diverter Kit (RB23 Series)	566.51
	5TMC6100002	Skid Shoes - Pair	150.71

#### Landscaping

#### RB2408 - 8 Ft. Heavy Plus Rear Blade

**Equipment for Base Machine** 

Hitch:

3-Point Category II, III and
ASAE Quick Coupler Category II, III
Tractor HP:

160 HP (Maximum - 2WD)
145 HP (Maximum - 4WD)
Tilt: 2 Positions,
Up to 15 Degrees, Up or Down
Shipping Weight: 1554 lbs.
Offset:
0 In. to 28 In. Right,
0 In. to 26 In. Left
Moldboard Thickness: 5/16 In.
Moldboard Length: 96 In.
Moldboard Height: 19 In.
Duty: Heavy Plus Duty
Cutting Edge:
1/2 In. x 6 In. Reversible
Assembly/Set-Up Time:
180 Minutes (Approximate)

Approximate Operating Weight: 1451 lbs.
Angle: 360 Degrees
Angle Forward:
4 Positions, Up to 26 Degrees Right
5 Positions, Up to 38 Degrees Left
Angle Reverse:
4 Positions, Up to 26 Degrees Right
5 Positions, Up to 38 Degrees Left
Parking Stand: Standard
Skid Shoe Bundle: Optional
End Plate Bundle: Optional
Tailwheel: Optional
Hydraulic Tilt and Offset Kits:
Optional (Hoses and Fittings Included)

Code	Attachment Identifier	Description	Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1331XF		RB2408 - 8 Ft. Heavy Plus Rear Blade	5,693.00
		HYDRAULIC KITS	
1000		Manual Kit Includes quantity 1 hydraulic angle cylinder, mechanical offset link, mechanical tilt link.	In Base Price
1010		Hydraulic Cylinder Kit, Angle - Offset - Tilt <i>Includes 3 cylinders</i> .	1,163.00
		HYDRAULIC KITS	
9020		Hydraulic Diverter Kit	516.00
9030		Hydraulic Relief Kit	840.00
9040		Hydraulic Tailwheel Kit, Single Gauge Wheel	1,390.00
9050		Hydraulic Tailwheel Kit, Dual Gauge Wheel	1,785.00
		END PLATES	
9010		End Plates (Pair)	165.00
		SKID SHOES	
9000		Skid Shoes (Pair)	49.00

#### ATTACHMENTS FOR FIELD CONVERSION

### Landscaping

### RB2408 - 8 Ft. Heavy Plus Rear Blade

Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		ATTACHMENTS FOR FIELD CONVERSION Continued	
	5TMC6200004	Miscellaneous End Plates - Pair (RB24 Series)	171.60
	5TMC6300053	Hydraulic Cylinder Kit - Offset or Angle - Includes 1 Cylinder (RB24 Series)	693.00
	5TMC6300063	Hydraulic Cylinder Kit - Tilt - Includes 1 Cylinder (RB24 Series)	493.91
	5TMC6600051	Hydraulic Diverter Kit (RB24 Series)	535.71
	5TMC6600061	Hydraulic Relief Kit (RB24 Series)	871.20
	5TMC6100003	Skid Shoes - Pair (RB24 Series)	50.60
	5TMC6600002	TailWheel Kit - Dual Gauge Wheel - Hydraulic (RB24 Series)	1,852.40
	5TMC6600001	TailWheel Kit - Single Gauge Wheel - Hydraulic (RB24 Series)	1,442.11

9000

#### FRONTIER PRODUCTS

#### Landscaping

#### RB2409 - 9 Ft. Heavy Plus Rear Blade

**Equipment for Base Machine** 

Hitch:

3-Point Category II, III and
ASAE Quick Coupler Category II, III
Tractor HP:

160 HP (Maximum - 2WD)
145 HP (Maximum - 4WD)
Tilt: 2 Positions,
Up to 15 Degrees, Up or Down
Shipping Weight: 1604 lbs.
Offset:

0 In. to 28 In. Right
0 In. to 26 In. Left
Moldboard Thickness: 5/16 In.
Moldboard Length: 108 In.
Moldboard Height: 19 In.
Duty: Heavy Plus Duty
Cutting Edge:
1/2 In. x 6 In. Reversible
Assembly/Set-Up Time:
180 Minutes (Approximate)

Approximate Operating Weight: 1501 lbs.
Angle: 360 Degrees
Angle Forward:
4 Positions, Up to 26 Degrees Right
5 Positions, Up to 38 Degrees Left
Angle Reverse:
4 Positions, Up to 26 Degrees Right
5 Positions, Up to 38 Degrees Left
Parking Stand: Standard
Skid Shoe Bundle: Optional
End Plate Bundle: Optional
Tailwheel: Optional
Hydraulic Tilt and Offset Kits:
Optional (Hoses and Fittings Included)

Attachment Code Identifier		Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1332XF		RB2409 - 9 Ft. Heavy Plus Rear Blade	5,808.00
		HYDRAULIC KITS	
1000		Manual Kit Includes quantity 1 hydraulic angle cylinder, mechanical offset link, mechanical tilt link.	In Base Price
1010		Hydraulic Cylinder Kit, Angle - Offset - Tilt <i>Includes 3 cylinders</i> .	1,163.00
		HYDRAULIC KITS	
9020		Hydraulic Diverter Kit	516.00
9030		Hydraulic Relief Kit	840.00
9040		Hydraulic Tailwheel Kit, Single Gauge Wheel	1,390.00
9050		Hydraulic Tailwheel Kit, Dual Gauge Wheel	1,785.00
		END PLATES	
9010		End Plates (Pair)	165.00
		SKID SHOES	

#### ATTACHMENTS FOR FIELD CONVERSION

Skid Shoes (Pair)

49.00

### Landscaping

### RB2409 - 9 Ft. Heavy Plus Rear Blade

Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		ATTACHMENTS FOR FIELD CONVERSION Continued	
	5TMC6200004	Miscellaneous End Plates - Pair (RB24 Series)	171.60
	5TMC6300053	Hydraulic Cylinder Kit - Offset or Angle - Includes 1 Cylinder (RB24 Series)	693.00
	5TMC6300063	Hydraulic Cylinder Kit - Tilt - Includes 1 Cylinder (RB24 Series)	493.91
	5TMC6600051	Hydraulic Diverter Kit (RB24 Series)	535.71
	5TMC6600061	Hydraulic Relief Kit (RB24 Series)	871.20
	5TMC6100003	Skid Shoes - Pair (RB24 Series)	50.60
	5TMC6600002	TailWheel Kit - Dual Gauge Wheel - Hydraulic (RB24 Series)	1,852.40
	5TMC6600001	TailWheel Kit - Single Gauge Wheel - Hydraulic (RB24 Series)	1,442.11

#### Landscaping

#### RB2410 - 10 Ft. Heavy Plus Rear Blade

**Equipment for Base Machine** 

Hitch:

3-Point Category II, III and
ASAE Quick Coupler Category II, III
Tractor HP:

160 HP (Maximum - 2WD)
145 HP (Maximum - 4WD)
Tilt: 2 Positions,
Up to 15 Degrees, Up or Down
Shipping Weight: 1653 lbs.
Offset:
0 In. to 28 In. Right
0 In. to 26 In. Left
Moldboard Thickness: 5/16 In.
Moldboard Length: 120 In.
Moldboard Height: 19 In.
Duty: Heavy Plus Duty
Cutting Edge:
1/2 In. x 6 In. Reversible
Assembly/Set-Up Time:
180 Minutes (Approximate)

Approximate Operating Weight: 1550 lbs.
Angle: 360 Degrees
Angle Forward:
4 Positions, Up to 26 Degrees Right
5 Positions, Up to 38 Degrees Left
Angle Reverse:
4 Positions, Up to 26 Degrees Right
5 Positions, Up to 26 Degrees Right
5 Positions, Up to 38 Degrees Left
Parking Stand: Standard
Skid Shoe Bundle: Optional
End Plates Bundle: Optional
Tailwheel: Optional
Hydraulic Tilt and Offset Kits:
Optional (Hoses and Fittings Included)

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1333XF		RB2410 - 10 Ft. Heavy Plus Rear Blade	5,934.00
		HYDRAULIC KITS	
1000		Manual Kit Includes quantity 1 hydraulic angle cylinder, mechanical offset link, mechanical tilt link.	In Base Price
1010		Hydraulic Cylinder Kit, Angle - Offset - Tilt <i>Includes 3 cylinders</i> .	1,163.00
		HYDRAULIC KITS	
9020		Hydraulic Diverter Kit	516.00
9030		Hydraulic Relief Kit	840.00
9040		Hydraulic Tailwheel Kit, Single Gauge Wheel	1,390.00
9050		Hydraulic Tailwheel Kit, Dual Gauge Wheel	1,785.00
		END PLATES	
9010		End Plates (Pair)	165.00
		SKID SHOES	
9000		Skid Shoes (Pair)	49.00

#### ATTACHMENTS FOR FIELD CONVERSION

### Landscaping

### RB2410 - 10 Ft. Heavy Plus Rear Blade

Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		ATTACHMENTS FOR FIELD CONVERSION Continued	
	5TMC6200004	Miscellaneous End Plates - Pair (RB24 Series)	171.60
	5TMC6300053	Hydraulic Cylinder Kit - Offset or Angle - Includes 1 Cylinder (RB24 Series)	693.00
	5TMC6300063	Hydraulic Cylinder Kit - Tilt - Includes 1 Cylinder (RB24 Series)	493.91
	5TMC6600051	Hydraulic Diverter Kit (RB24 Series)	535.71
	5TMC6600061	Hydraulic Relief Kit (RB24 Series)	871.20
	5TMC6100003	Skid Shoes - Pair (RB24 Series)	50.60
	5TMC6600002	TailWheel Kit - Dual Gauge Wheel - Hydraulic (RB24 Series)	1,852.40
	5TMC6600001	TailWheel Kit - Single Gauge Wheel - Hydraulic (RB24 Series)	1,442.11

#### Londoconina

#### Landscaping

#### RB5060 - 5 Ft. Standard Duty Rear Blade

**Equipment for Base Machine** 

3-Point Hitch:
Category I
Working Width: 60 In.
Operational Weight: 308 lbs.
Tractor HP: 20 to 56 HP
Tilt Positions: Seven
Offset: 12 In. Left or Right
Shipping Weight:
674 lbs. for Quantity 2
Pivot: 360 Degrees
Parking Stand: Standard
Packaged 2 Per Crate
Moldboard Height: 14.5 In.
Moldboard Thickness: 1/4 In.

Duty: Standard Duty
Cutting Edge:
3/8 In. x 6 In. Reversible
Assembly/Set-Up Time: 15 Minutes
Angle - Forward:
0, 15 and 30 Degrees Each Side
Angle - Reverse:
0, 15 and 30 Degrees Each Side
Skid Shoes: NA

Attachment Identifier	Description	List Price Suggested USD (\$)	
	Select One Code From Each Required Category		
	BASE MACHINE  RB5060 - 5 Ft. Standard Duty Rear Blade	885.00	
		Select One Code From Each Required Category  BASE MACHINE	

Attachment Information is not available in MOCI for the base code 1651XF

Landscaping

### RB5060 - 5 Ft. Standard Duty Rear Blade Continued

THIS PAGE INTENTIONALLY LEFT BLANI	TΗ	IS	PAGE	INTE	NOITN	IALLY	LEFT	BLAN	K
------------------------------------	----	----	------	------	-------	-------	------	------	---

Landscaping

#### RB5072 - 6 Ft. Standard Duty Rear Blade

**Equipment for Base Machine** 

3-Point Hitch:
Category I
Working Width: 72 In.
Operational Weight: 332 lbs.
Tractor HP: 20 to 56 HP
Tilt Positions: Seven
Offset: 12 In. Left or Right
Shipping Weight:
722 lbs. for Quantity 2
Pivot: 360 Degrees
Parking Stand: Standard
Packaged 2 Per Crate
Moldboard Height: 14.5 In.
Moldboard Thickness: 1/4 In.

Duty: Standard Duty Cutting Edge: 3/8 In. x 6 In. Reversible Assembly/Set-Up Time: 15 Minutes Angle - Forward: 0, 15 and 30 Degrees Each Side Angle - Reverse: 0 15 and 30 Degrees Each Side Skid Shoes: NA

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1652XF		BASE MACHINE  PRECIO: 6 Et Standard Duty Pear Plade	953.00
10028F		RB5072 - 6 Ft. Standard Duty Rear Blade Order in multiples of two.	953.00

Attachment Information is not available in MOCI for the base code 1652XF

Landscaping



THIS PAGE INTENTIONALLY LEFT BLANK

### Landscaping

#### RB5084 - 7 Ft. Standard Duty Rear Blade

**Equipment for Base Machine** 

3-Point Hitch:
Category I
Working Width: 84 In.
Operational Weight: 348 lbs.
Tractor HP: 20 to 56 HP
Tilt Positions: Seven
Offset: 12 In. Left or Right
Shipping Weight:
754 lbs. for Quantity 2
Pivot: 360 Degrees
Parking Stand: Standard
Packaged 2 Per Crate
Moldboard Height: 14.5 In.
Moldboard Thickness: 1/4 In.

Duty: Standard Duty
Cutting Edge:
3/8 In. x 6 In. Reversible
Assembly/Set-Up Time: 15 Minutes
Angle - Forward:
0, 15 and 30 Degrees Each Side
Angle - Reverse:
0, 15 and 30 Degrees Each Side
Skid Shoes: NA

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1653XF		BASE MACHINE  RB5084 - 7 Ft. Standard Duty Rear Blade  Order in multiples of two.	1,019.00

Attachment Information is not available in MOCI for the base code 1653XF

Landscaping



THIS PAGE INTENTIONALLY LEFT BLANK

Landscaping

#### RB5096 - 8 Ft. Standard Duty Rear Blade

**Equipment for Base Machine** 

3-Point Hitch:
Category I
Working Width: 96 In.
Operational Weight: 380 lbs.
Tractor HP: 20 to 56 HP
Tilt Positions: Seven
Offset: 12 In. Left or Right
Shipping Weight:
818 lbs. for Quantity 2
Pivot: 360 Degrees
Parking Stand: Standard
Packaged 2 Per Crate
Moldboard Height: 14.5 In.
Moldboard Thickness: 1/4 In.

Duty: Standard Duty Cutting Edge: 3/8 In. x 6 In. Reversible Assembly/Set-Up Time: 15 Minutes Angle - Forward: 0, 15 and 30 Degrees Each Side Angle - Reverse: 0 15 and 30 Degrees Each Side Skid Shoes: NA

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1654XF		RB5096 - 8 Ft. Standard Duty Rear Blade Order in multiples of two.	1,096.00

Attachment Information is not available in MOCI for the base code 1654XF

Landscaping

### RB5096 - 8 Ft. Standard Duty Rear Blade Continued

THIS PAGE INTENTIONALLY LEFT BLANK

Landscaping

### RB5048L - 4 Ft. Limited Category 1 Economy Duty Rear Blade

Equipment for Base Machine

3-Point Hitch:
Category I
Working Width: 48 In.
Operational Weight: 186 lbs.
Tractor HP: 18 PTO HP Max
Tilt Positions: None
Offset: None
Shipping Weight:
430 lbs. for Quantity 2
Pivot: 360 Degrees
Parking Stand: Standard
Packaged 2 Per Crate
Moldboard Height: 14.5 In.
Moldboard Length: 48 In.
Moldboard Thickness: 1/4 In.
Duty: Economy Duty

Cutting Edge:
3/8 In. x 6 In. Reversible
Assembly/Set-Up Time: 15 Minutes
(Approximate) - Per Pair
Angle - Forward:
0, 15 and 30 Degrees Each Side
Angle - Reverse:
0, 15 and 30 Degrees Each Side
Skid Shoes: NA

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1751XF		RB5048L - 4 Ft. Limited Category 1 Economy Duty Rear Blade Order in multiples of two.	567.00

Attachment Information is not available in MOCI for the base code 1751XF

Landscaping

RB5048L - 4 Ft. Limited Category 1 Econon Continued	ny Duty Rear Blade
THIS PAGE INTENTIONALLY LEF	T BLANK

Landscaping

#### RB5060L - 5 Ft. Limited Category 1 Economy Duty Rear Blade

Equipment for Base Machine

3-Point Hitch:
Category I
Working Width: 60 In.
Operational Weight: 205 lbs.
Tractor HP: 18 PTO HP Max
Tilt Positions: None
Offset: None
Shipping Weight:
468 lbs. for Quantity 2
Pivot: 360 Degrees
Parking Stand: Standard
Packaged 2 Per Crate
Moldboard Height: 14.5 In.
Moldboard Length: 60 In.
Moldboard Thickness: 1/4 In.
Duty: Economy Duty

Cutting Edge:
3/8 In. x 6 In. Reversible
Assembly/Set-Up Time: 15 Minutes
(Approximate) - Per Pair
Angle - Forward:
0, 15 and 30 Degrees Each Side
Angle - Reverse:
0, 15 and 30 Degrees Each Side
Skid Shoes: NA

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1752XF		BASE MACHINE  RB5060L - 5 Ft. Limited Category 1 Economy Duty Rear Blade  Order in multiples of two.	638.00

Attachment Information is not available in MOCI for the base code 1752XF

Landscaping

### RB5060L - 5 Ft. Limited Category 1 Economy Duty Rear Blade Continued

THIS PAGE INTENTIONALLY LEFT BLANK

#### Landscaping

#### SW2160 - 60 In. Hydraulic, 300 Series Carrier Loader Mount Rotary Broom

**Equipment for Base Machine** 

Function: Sweeping

Working Width: 60 In. (1,524 mm)

Working Width at Max Angle: 55 In. (1,397 mm) Transport Width: 72 In. (1,828.8 mm)

Operating Weight: 860 lb. (390 kg.) Standard Bristle Material: Poly, 50/50 Steel/Poly

Available as Replacement Brush Speed: 160 RPM

Brush Diameter: 32 In. (812.8 mm) Angle Range: 23 degrees left or right

Hood Thickness: 14 gauge

Side Frame Thickness: 3/16 In. (4.8 mm)

Parking Stands Included

Approximate Set-Up Time: 30 Minutes

Function: Hydraulic Power Unit

Pressure: 2700 psi

Flow: 16 gpm Reservoir Capacity: 15 gal. System Capacity: 17 gal.

System Features: Pressure relieve valve, filter,

temperature

and oil level gauge, and thermal protection switch

Hoses, Tips, and Brackets included Tractor RPM: 540 RPM

PTO Manufacturer: Comer Parking Stand: Standard Hitch Category: Category I Quick Hitch Compatibility:

iMatch Compatible

Approximate Set-Up Time: 120 Minutes

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1591XF		SW2160 - 60 In. Hydraulic, 300 Series Carrier Loader Mount Rotary Broom With Hydraulic Angle Adjustment and HP2025 Hydraulic Power Unit - U.S. Must only be used with HP2025 Hydraulic Power Pack Unit.	15,440.00
		HYDRAULIC POWER UNITS	
1000		HP2025 - Hydraulic Power Unit, 25 HP Includes wiring harness 5RDF0078 to control the loader mounted implement.	In Base Price
1095		Less Hydraulic Power Unit HP2025	-7,785.00
		OIL COOLER	
2000		Oil Cooler for HP2025 and HP2134 Hydraulic Power Units Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation instructions. Recommended for application generating high heat.  Not available with option Code 1095.	In Base Price
2095		Less Oil Cooler	-1,989.00
9000		DUST DEFLECTOR Steel/Rubber Dust Deflector Kit SW2160	325.00
9010		DUST SUPPRESSION KIT SW21 Dust Suppression Kit Includes 60 gallon water tank, electric pump, nozzles, hoses and fittings, electrical harness with switch and installation instructions. Requires the steel/rubber dust deflector kit.	2,282.00

### Landscaping

#### SW2160 - 60 In. Hydraulic, 300 Series Carrier Loader Mount Rotary Broom Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		DUST SUPPRESSION KITContinued	
		LAWN DETHATCHING KIT	
9030		SW21 Lawn Dethatching Kit Includes support components, hardware and installation instruction. Gauge wheel kit required. Compatible with dust suppression kit.	488.00
9040		Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console. Not available with option Code 1095.	110.00
		GAUGE WHEELS	
9020		SW21 Gauge Wheel Kit Includes two pairs 8 In. diameter by 3.5 In. wide solid wheels, mounting brackets and hardware.	779.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5RDF0036	Miscellaneous Oil Cooler for HP2025 and HP2134 Hydraulic Power Units Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation instructions. Recommended for application generating high heat.	2,063.60
	5RDF0035	SW21 Dust Suppression Kit Includes 60 gallon water tank, electric pump, nozzles, hoses and fittings, electrical harness with switch and installation instructions. Requires the steel/rubber dust deflector kit.	2,368.31
	5RDF0033	SW21 Gauge Wheel Kit Includes two pairs 8 In. diameter by 3.5 In. wide solid wheels, mounting brackets and hardware.	808.51
	5RDF0034	SW21 Lawn Dethatching Kit Requires gauge wheel kit, compatible with dust suppression kit.	506.00
	5RDF0043	SW2160 50/50 Poly/Steel Wafter Brush Replacement Kit Includes required quantity of wafters to replace entire brush.	741.40
	5RDF0030	SW2160 Dust Deflector Kit	337.71
	5RDF0040	SW2160 Poly Wafter Brush Replacement Kit Includes required quantity of wafters to replace entire brush.	720.51
	5RDF0038	Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console.	114.40
	5RDF0078	Wiring Harness for HP2025 and HP2134 Hydraulic Power Units to control Loader Mounted Attachment Includes complete wiring harness from switch in the console to 3 cavities connectors for front implements.	159.51

#### Landscaping

#### SW2172 - 72 In. Hydraulic, 300/400 Series Carrier Loader Mount Rotary Broom **Equipment for Base Machine**

Function: Sweeping

Working Width: 72 In. (1,828.8 mm)

Working Width at Max Angle: 66 In. (1,676.4 mm) Transport Width: 84 In. (2,133.6 mm)

Operating Weight: 890 lb. (403.7 kg.)

Standard Bristle Material: Poly, 50/50 Steel/Poly

Available as Replacement Brush Speed: 160 RPM

Brush Diameter: 32 In. (812.8 mm) Angle Range: 23 degrees left or right

Hood Thickness: 14 gauge

Side Frame Thickness: 3/16 In. (4.8 mm)

Parking Stands Included

Approximate Set-Up Time: 30 Minutes

Function: Hydraulic Power Unit

Pressure: 2700 psi

Flow: 16 gpm

Reservoir Capacity: 15 gal. System Capacity: 17 gal.

System Features: Pressure relieve valve, filter,

temperature

and oil level gauge, and thermal protection switch

Hoses, Tips, and Brackets included Tractor RPM: 540 RPM

PTO Manufacturer: Comer Parking Stand: Standard Hitch Category: Category I Quick Hitch Compatibility:

iMatch Compatible

Approximate Set-Up Time: 120 Minutes

Optional:

Function: Hydraulic Power Unit

Pressure: 2700 psi

Flow: 16 gpm Reservoir Capacity: 15 gal.

System Capacity: 17 gal.

System Features: Pressure relieve valve, filter,

temperature

and oil level gauge, and thermal protection switch

Hoses, Tips, and Brackets included Tractor RPM: 540 RPM

PTO Manufacturer: Comer Parking Stand: Standard Hitch Category: Category I

Quick Hitch Compatibility: iMatch Compatible

Approximate Set-Up Time: 120 Minutes

Code	Attachment Identifier	Description	List Price Suggested USD (\$)

#### Select One Code From Each Required Category

#### **BASE MACHINE**

1592XF	SW2172 - 72 In. Hydraulic, 300/400 Series Carrier Loader Mount Rotary Broom	15,761.00
	With Hydraulic Angle Adjustment and HP2025 Hydraulic Power Unit - U.S.	
	Must be used with either the HP2025 or HP2134 Hydraulic Power Pack Units	

#### **HYDRAULIC POWER UNITS**

1000	HP2025 - Hydraulic Power Unit, 25 HP <i>Includes wiring harness SRDF0078 to control the loader mounted implement.</i>	In Base Price
1095	Less Hydraulic Power Unit HP2025	-7,785.00
1010	HP2134 - Hydraulic Power Unit, 34 HP Includes wiring harness SRDF0078 to control the loader mounted implement.	125.00

#### **OIL COOLER**

2000	Oil Cooler for HP2025 and HP2134 Hydraulic Power Units	In Base Price
	Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation	
	instructions. Recommended for application generating high heat.	
	Not available with option Code 1095.	

2095 Less Oil Cooler -1,989.00

### Landscaping

#### SW2172 - 72 In. Hydraulic, 300/400 Series Carrier Loader Mount Rotary Broom Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		DUST DEFLECTOR	
9000		Steel/Rubber Dust Deflector Kit SW2172	294.00
9010		DUST SUPPRESSION KIT SW21 Dust Suppression Kit Includes 60 gallon water tank, electric pump, nozzles, hoses and fittings, electrical harness with switch and installation instructions. Requires the steel/rubber dust deflector kit.	2,282.00
		LAWN DETHATCHING KIT	
9030		SW21 Lawn Dethatching Kit Includes support components, hardware and installation instruction. Gauge wheel kit required. Compatible with dust suppression kit.	488.00
9040		Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console. Not available with option Code 1095.	110.00
9020		GAUGE WHEELS SW21 Gauge Wheel Kit Includes two pairs 8 In. diameter by 3.5 In. wide solid wheels, mounting brackets and	779.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5RDF0036	Miscellaneous Oil Cooler for HP2025 and HP2134 Hydraulic Power Units Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation instructions. Recommended for application generating high heat.	2,063.60
	5RDF0035	SW21 Dust Suppression Kit Includes 60 gallon water tank, electric pump, nozzles, hoses and fittings, electrical harness with switch and installation instructions. Requires the steel/rubber dust deflector kit.	2,368.31
	5RDF0033	SW21 Gauge Wheel Kit Includes two pairs 8 In. diameter by 3.5 In. wide solid wheels, mounting brackets and hardware.	808.51
	5RDF0034	SW21 Lawn Dethatching Kit Requires gauge wheel kit, compatible with dust suppression kit.	506.00
	5RDF0044	SW2172 50/50 Poly/Steel Wafter Brush Replacement Kit Includes required quantity of wafters to replace entire brush.	851.40
	5RDF0031	SW2172 Dust Deflector Kit	304.71
	5RDF0041	SW2172 Poly Wafter Brush Replacement Kit Includes required quantity of wafters to replace entire brush.	851.40

### Landscaping

#### SW2172 - 72 In. Hydraulic, 300/400 Series Carrier Loader Mount Rotary Broom Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
	5RDF0038	ATTACHMENTS FOR FIELD CONVERSIONContinued Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console.	114.40
	5RDF0078	Wiring Harness for HP2025 and HP2134 Hydraulic Power Units to control Loader Mounted Attachment Includes complete wiring harness from switch in the console to 3 cavities connectors for front implements.	159.51

Landscaping

SW2172 - 72 In. Hydraulic	300/400 Series Carrier	Loader	<b>Mount Rotary</b>	<b>Broom</b>
	Continued			

THIS	SPA	GF II	NTFN	ITIONAL	IYIFF	T BLANK
	<i>-</i>	$\circ$	<b>1</b>   L   1	4 I I O I 4/ \L		

List Dates

#### FRONTIER PRODUCTS

#### Landscaping

#### SW2184 - 84 In. Hydraulic, 400 Series Carrier Loader Mount Rotary Broom

**Equipment for Base Machine** 

Function: Sweeping

Working Width: 84 In. (2,133.6 mm)

Working Width at Max Angle: 77 In. (1,955.8 mm)
Transport Width: 96 In. (2,438.4 mm)
Operating Weight: 920 lb. (417.3 kg.)
Standard Bristle Material: Poly, 50/50 Steel/Poly

Available as Replacement Brush Speed: 160 RPM

Brush Diameter: 32 In. (812.8 mm) Angle Range: 23 degrees left or right

Hood Thickness: 14 gauge

Side Frame Thickness: 3/16 In. (4.8 mm)

Parking Stands Included

Approximate Set-Up Time: 30 Minutes Function: Hydraulic Power Unit

Pressure: 2700 psi Flow: 16 gpm

Reservoir Capacity: 15 gal.

System Capacity: 17 gal.

System Features: Pressure relieve valve, filter,

temperature

and oil level gauge, and thermal protection switch

Hoses, Tips, and Brackets included Tractor RPM: 540 RPM

PTO Manufacturer: Comer Parking Stand: Standard Hitch Category: Category I Quick Hitch Compatibility:

iMatch Compatible

Approximate Set-Up Time: 120 Minutes

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1593XF		SW2184 - 84 In. Hydraulic, 400 Series Carrier Loader Mount Rotary Broom With Hydraulic Angle Adjustment and HP2134 Hydraulic Power Unit - U.S. Must only be used with HP2134 Hydraulic Power Pack Unit.	16,649.00
		HYDRAULIC POWER UNITS	
1095		Less Hydraulic Power Unit HP2134	-7,919.00
1010		HP2134 - Hydraulic Power Unit, 34 HP Includes wiring harness 5RDF0078 to control the loader mounted implement.	In Base Price
		OIL COOLER	
2000		Oil Cooler for HP2025 and HP2134 Hydraulic Power Units Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation instructions. Recommended for application generating high heat. Not available with option Code 1095.	In Base Price
2095		Less Oil Cooler	-1,989.00
9000		DUST DEFLECTOR Steel/Rubber Dust Deflector Kit SW2184	294.00
9010		DUST SUPPRESSION KIT SW21 Dust Suppression Kit Includes 60 gallon water tank, electric pump, nozzles, hoses and fittings, electrical harness with switch and installation instructions. Requires the steel/rubber dust deflector kit.	2,282.00

### Landscaping

#### SW2184 - 84 In. Hydraulic, 400 Series Carrier Loader Mount Rotary Broom Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		DUST SUPPRESSION KITContinued	
		LAWN DETHATCHING KIT	
9030		SW21 Lawn Dethatching Kit Includes support components, hardware and installation instruction. Gauge wheel kit required. Compatible with dust suppression kit.	488.00
9040		Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console. Not available with option Code 1095.	110.00
		GAUGE WHEELS	
9020		SW21 Gauge Wheel Kit Includes two pairs 8 In. diameter by 3.5 In. wide solid wheels, mounting brackets and hardware.	779.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5RDF0036	Miscellaneous Oil Cooler for HP2025 and HP2134 Hydraulic Power Units Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation instructions. Recommended for application generating high heat.	2,063.60
	5RDF0035	SW21 Dust Suppression Kit Includes 60 gallon water tank, electric pump, nozzles, hoses and fittings, electrical harness with switch and installation instructions. Requires the steel/rubber dust deflector kit.	2,368.31
	5RDF0033	SW21 Gauge Wheel Kit Includes two pairs 8 In. diameter by 3.5 In. wide solid wheels, mounting brackets and hardware.	808.51
	5RDF0034	SW21 Lawn Dethatching Kit Requires gauge wheel kit, compatible with dust suppression kit.	506.00
	5RDF0045	SW2184 50/50 Poly/Steel Wafter Brush Replacement Kit Includes required quantity of wafters to replace entire brush.	995.51
	5RDF0032	SW2184 Dust Deflector Kit	304.71
	5RDF0042	SW2184 Poly Wafter Brush Replacement Kit Includes required quantity of wafters to replace entire brush.	993.31
	5RDF0038	Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console.	114.40
	5RDF0078	Wiring Harness for HP2025 and HP2134 Hydraulic Power Units to control Loader Mounted Attachment Includes complete wiring harness from switch in the console to 3 cavities connectors for front implements.	159.51

80.31

275.00

#### FRONTIER PRODUCTS

#### Landscaping

#### RT1181 - 81 In. Standard Duty Rotary Tiller

**Equipment for Base Machine** 

Working Width:

81 In. (2,057.4 mm)

Tractor PTO Speed: 540 RPM

Tractor PTO HP (Minimum): 50 HP (37.3 kW)
Tractor PTO HP (Maximum): 60 HP (44.7kW)

Blade Shape: C

Skid Shoes: Adjustable Parking Stand Included Gearbox Speed: Single Rotor Speed: 228 RPM Rotor Flanges: 11 Side Drive: Gear Blades/Rotor: 6

Rear Door Support: Spring

Max Working Depth: 7.9 In. (200.7 mm) Outside to Outside Width: 86 In. (2,184.4 mm)

Driveline Protection: Friction Disc Tillage Depth Control: Skid Shoes

Hitch:

Category II, Quick Coupler Compatible

			List Price
	Attachment		Suggested
Code	Identifier	Description	USD (\$)

Select One Code From Each Required Category

#### **BASE MACHINE**

135CXF RT1181 - 81 In. Standard Duty Rotary Tiller 5,294.00

#### ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous

5MHF20020376 French Kit - For RT1173, RT1181, RT2283, RT2283C, RT1273, and RT2293

 $Includes\ Operators\ Manual,\ Parts\ Catalog,\ and\ Safety\ Decals.$ 

BLV11202 John Deere Quik-Knect Driveline Yoke Bundle

Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per

tractor. This bundle is removable and can be used on various tractors within the

compatibility. One implement driveline yoke bundle is needed per implement, and remains with

implement at all times (field install required).

Landscaping

# RT1181 - 81 In. Standard Duty Rotary Tiller Continued

THIS PAGE INTENTIONALLY LEFT BLANK

4,748.00

165.00

275.00

#### FRONTIER PRODUCTS

#### Landscaping

#### RT1265 - 65 In. Medium Duty Rotary Tiller

**Equipment for Base Machine** 

Working Width:
65 In. (165 cm)
Tractor PTO Speed: 540 RPM
Tractor PTO HP (Minimum):
30 HP (22 kW)
Tractor PTO HP (Maximum):
60 HP (44 kW)
Blade Shape: L
Skid Shoes: Adjustable
Rear Door Support: Chain
Parking Stand Included
Gearbox Speed: Single
Rotor Speed: 208 RPM
Rotor Flanges: 8
Blades/Rotor: 6
Max Working Depth:

7.9 In. (20 cm)
Outside to Outside Width:
70 In. (178 cm)
Driveline Protection: Friction Clutch
Tillage Depth Control: Skid Shoes
Hitch: Category I or II, iMatch
and Quick Coupler Compatible
Frame:
Heavy Duty and Bent Frame with
Extra Thickness Above Rotor

			List Price
	Attachment		Suggested
Code	Identifier	Description	USD (\$)

Select One Code From Each Required Category

#### **BASE MACHINE**

136AXF RT1265 - 65 In. Medium Duty Rotary Tiller

Skid shoes in base. No Roller Option.

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous

5MHF20020375 French Kit - For RT1142, RT1149, RT1157, RT1165. and RT1265

Includes Operators Manual, Parts Catalog, and Safety Decals.


BLV11202 John Deere Quik-Knect Driveline Yoke Bundle

Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per

tractor. This bundle is removable and can be used on various tractors within the compatibility. One implement driveline yoke bundle is needed per implement, and remains with

implement at all times (field install required).

Landscaping

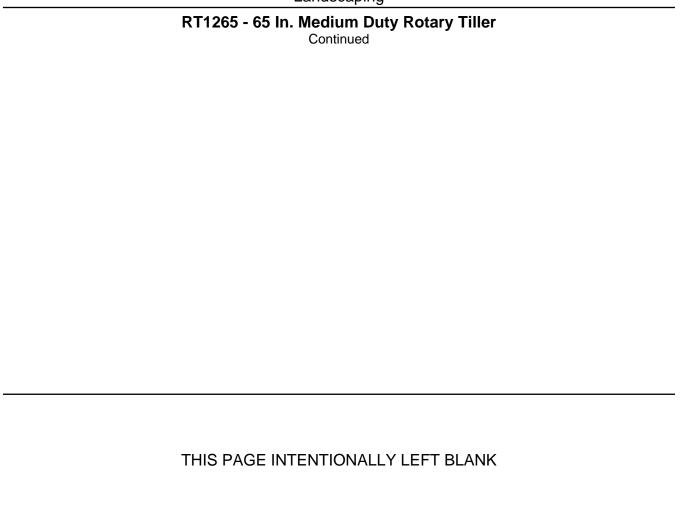

#### Landscaping

### RT1273 - 73 In. Medium Duty Rotary Tiller

**Equipment for Base Machine** 

Working Width: 73 In. (185 cm) Tractor PTO speed: 540 RPM Tractor PTO HP (Minimum): 30 HP (22 kW) Tractor PTO HP (Maximum): 80 HP (59 kW) Blade Shape: L Skid Shoes: Adjustable Side Drive: Gear Rear Door Support: Spring Rod Parking Stand Included Gearbox Speed: Single Rotor Speed: 213 RPM Rotor Flanges: 8 Blades/Rotor: 6 Adjustable Lower Hitches Max Working Depth:

8.7 In. (22 cm)

Outside to Outside Width: 77 In. (196 cm) Driveline Protection: Friction Clutch Tillage Depth Control: Skid Shoes Hitch: Category II, Quick Coupler Compatible Frame: Double-Wall Frame Construction Above Rotor for Strength and Rock Protection

			List Price
	Attachment		Suggested
Code	Identifier	Description	USD (\$)

Select One Code From Each Required Category

#### **BASE MACHINE**

136BXF RT1273 - 73 In. Medium Duty Rotary Tiller

Skid shoes in base. No Roller Option.

7,632.00

#### ATTACHMENTS FOR FIELD CONVERSION

#### Miscellaneous

5MHF20020376 French Kit - For RT1173, RT1181, RT2283, RT2283C, RT1273, and RT2293

Includes Operators Manual, Parts Catalog, and Safety Decals.

80.31

Landscaping

RT1273 - 73 In.	<b>Medium Duty</b>	<b>Rotary</b>	Tiller
	Continued		

#### Landscaping

### RT2283 - 83 In. Medium Duty Rotary Tiller

**Equipment for Base Machine** 

Working Width: 83 In. (210 cm)
Tractor PTO Speed: 540 RPM
Tractor PTO HP (Minimum): 60 HP (44kW) Tractor PTO HP (Maximum): 100 HP (74 kW) Blade Shape: L Skid Shoes: Adjustable Side Drive: Gear

Rear Door Support: Spring Rod Parking Stand Included Gearbox Speed: Multi Rotor Speed: 140-714-215 (Factory Setting)-266 RPM

Rotor Flanges: 9 Blades/Rotor: 6 Adjustable Lower Hitches Max Working Depth:

10.6 In. (27 cm) Outside to Outside Width: 88 In. (224 cm) Driveline Protection: Friction Clutch Tillage Depth Control: Skid Shoes, Cage Roller Optional Hitch: Category II,
Quick Coupler Compatible Frame: Double-Wall Frame Construction Above Rotor for Strength and Rock Protection

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	]
		BASE MACHINE	
1671XF		RT2283 - 83 In. Medium Duty Rotary Tiller Skid shoes in base. Roller Optional.	9,244.00
		DEPTH CONTROL SYSTEM	
1000		Skid Shoe	In Base Price
1010		Cage Roller Manual Adjustment	2,279.00
1020		Cage Roller Hydraulic Adjustment	2,518.00
8010		LEFT DISC Left Disc For RT22, and RT23.	846.00
8000		RIGHT DISC Right Disc For RT22, and RT23.	846.00

#### ATTACHMENTS FOR FIELD CONVERSION


Miscellaneous

5MHF20020376 French Kit - For RT1173, RT1181, RT2283, RT2283C, RT1273, and RT2293

Includes Operators Manual, Parts Catalog, and Safety Decals.

80.31

Landscaping

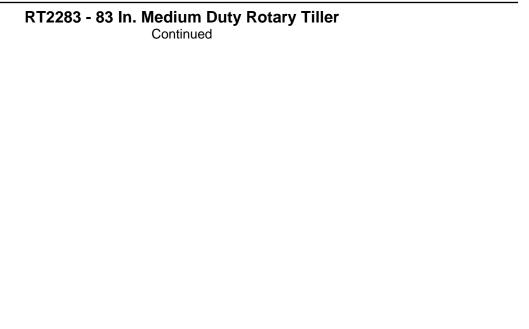

THIS PAGE INTENTIONALLY LEFT BLANK

#### Landscaping

#### RT2293 - 93 In. Medium Duty Rotary Tiller

**Equipment for Base Machine** 

Working Width: 93 In. (235 cm) Tractor PTO Speed: 540 RPM Tractor PTO HP (Minimum): 70 HP (52 kW) Tractor PTO HP (Maximum): 100 HP (74 kW) Blade Shape: L

Skid Shoes: Adjustable Side Drive: Gear

Rear Door Support: Spring Rod Parking Stand Included Gearbox Speed: Multi Rotor Speed: 140-174-215

(Factory Setting)-266 RPM Rotor Flanges: 10 Blades/Rotor: 6

Adjustable Lower Hitches Max Working Depth:

10.6 In. (27 cm)
Outside to Outside Width: 98 In. (249 cm) Driveline Protection: Friction Clutch Tillage Depth Control: Skid Shoes, Cage Roller Optional Hitch: Category II,
Quick Coupler Compatible Frame: Double-Wall Frame Construction Above Rotor for Strength and

Rock Protection

			List Price
	Attachment		Suggested
Code	Identifier	Description	USD (\$)

#### Select One Code From Each Required Category

#### **BASE MACHINE**

1672XF	RT2293 - 93 In. Medium Duty Rotary Tiller	9,851.00
	Skid shoes in base. Roller Optional.	

DEPTH CONTROL SYSTEM
----------------------

	DEPTH CONTROL STSTEM	
1000	Skid Shoe	In Base Price
1010	Cage Roller Manual Adjustment	2,814.00
1020	Cage Roller Hydraulic Adjustment	2,916.00
	LEFT DISC	
8010	Left Disc For RT22, and RT23.	846.00

#### **RIGHT DISC**

8000 Right Disc 846.00 For RT22, and RT23.

#### ATTACHMENTS FOR FIELD CONVERSION

#### Miscellaneous

5MHF20020376 French Kit - For RT1173, RT1181, RT2283, RT2283C, RT1273, and RT2293 80.31 Includes Operators Manual, Parts Catalog, and Safety Decals.

Landscaping

	Medium Duty Rotary Tiller Continued
THIS PAGE INTE	ENTIONALLY LEFT BLANK

#### Landscaping

#### RT2383 - 82 In. Heavy Duty Rotary Tiller

Equipment for Base Machine

Working Width:
82 In. (208 cm)
Tractor PTO Speed: 540 RPM
Tractor PTO HP (Minimum):
60 HP (44 kW)
Tractor PTO HP (Maximum):
130 HP (96 kW)
Blade Shape: L
Skid Shoes: Adjustable
Side Drive: Gear
Rear Door Support:
Metal Rod with Double Spring
Parking Stand Included
Gearbox Speed: Multi
Rotor Speed:
175-214-262 (Factory Setting)-143 RPM
Rotor Flanges: 9
Blades/Rotor: 6
Max Working Depth:

10.6 In. (27 cm)
Outside to Outside Width:
88 In. (224 cm)
Driveline Protection: Friction Clutch
Tillage Depth Control: Skid Shoes,
Cage Roller Optional
Hitch: Category II,
Quick Coupler Compatible
Frame:
Double-Wall Frame Construction
Above Rotor for Strength and
Rock Protection

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	]
		BASE MACHINE	
1683XF		RT2383 - 82 In. Heavy Duty Rotary Tiller Skid shoes in base. Roller Optional.	10,542.00
		DEPTH CONTROL SYSTEM	
1000		Skid Shoe	In Base Price
1010		Cage Roller Manual Adjustment	2,279.00
1020		Cage Roller Hydraulic Adjustment	2,518.00
8010		LEFT DISC Left Disc For RT22, and RT23.	846.00
8000		RIGHT DISC Right Disc For RT22, and RT23.	846.00

Attachment Information is not available in MOCI for the base code 1683XF

Landscaping

### RT2383 - 82 In. Heavy Duty Rotary Tiller Continued

#### Landscaping

### RT2308 - 102 In. Heavy Duty Rotary Tiller

Equipment for Base Machine

Working Width:
102 In. (260 cm)
Tractor PTO Speed: 540 RPM
Tractor PTO HP (Minimum):
80 HP (59 kW)
Tractor PTO HP (Maximum):
130 HP (96 kW)
Blade Shape: L
Skid Shoes: Adjustable
Side Drive: Gear
Rear Door Support:
Metal Rod with Double Spring
Parking Stand Included
Gearbox Speed: Multi
Rotor Speed: 175-214-262
(Factory Setting)-143 RPM
Rotor Flanges: 11
Blades/Rotor: 6

Max Working Depth:

10.6 In. (27 cm)
Outside to Outside Width:
108 In. (274 cm)
Driveline Protection: Friction Clutch
Tillage Depth Control: Skid Shoes,
Cage Roller Optional
Hitch: Category II,
Quick Coupler Compatible
Frame:
Double-Wall Frame Construction
Above Rotor for Strength and
Rock Protection

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1681XF		RT2308 - 102 In. Heavy Duty Rotary Tiller Skid shoes in base. Roller Optional.	11,721.00
		DEPTH CONTROL SYSTEM	
1000		Skid Shoe	In Base Price
1010		Cage Roller Manual Adjustment	2,679.00
1020		Cage Roller Hydraulic Adjustment	3,064.00
8010		LEFT DISC Left Disc For RT22, and RT23.	846.00
8000		RIGHT DISC Right Disc For RT22, and RT23.	846.00
8020		ROTOR FLANGE REINFORCEMENT KIT Rotor Flange Reinforcement Kit	828.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5MH99525575	Miscellaneous Rotor Flange Reinforcement Kit (RT2308)	859.11

### Landscaping

### RT2308 - 102 In. Heavy Duty Rotary Tiller

Continued

#### Landscaping

#### RT2310 - 121 In. Heavy Duty Rotary Tiller

Equipment for Base Machine

Working Width:
121 In. (310 cm)
Tractor PTO Speed: 540 RPM
Tractor PTO HP (Minimum):
100 HP (75 kW)
Tractor PTO HP (Maximum):
130 HP (96 kW)
Blade Shape: L
Skid Shoes: Adjustable
Side Drive: Gear
Rear Door Support:
Metal Rod with Double Spring
Parking Stand Included
Gearbox Speed: Multi
Rotor Speed: 175-214-262
(Factory Setting)-143 RPM
Rotor Flanges: 13
Blades/Rotor: 6

Max Working Depth:

10.6 In. (27 cm)
Outside to Outside Width:
128 In. (325 cm)
Driveline Protection: Friction Clutch
Tillage Depth Control: Skid Shoes,
Cage Roller Optional
Hitch: Category II,
Quick Coupler Compatible
Frame:
Double-Wall Frame Construction
Above Rotor for Strength and
Rock Protection

	Attachment		List Price Suggested
Code	Identifier	Description	USD (\$)
		Select One Code From Each Required Category	]
		BASE MACHINE	
1682XF		RT2310 - 121 In. Heavy Duty Rotary Tiller Skid shoes in base. Roller Optional.	13,269.00
		DEPTH CONTROL SYSTEM	
1000		Skid Shoe	In Base Price
1010		Cage Roller Manual Adjustment	3,020.00
1020		Cage Roller Hydraulic Adjustment	3,424.00
		LEFT DISC	
8010		Left Disc For RT22, and RT23.	846.00
		RIGHT DISC	
8000		Right Disc For RT22, and RT23.	846.00

Attachment Information is not available in MOCI for the base code 1682XF

Landscaping

RT2310 - 121 In. Heavy Duty Rotary Tiller Continued
THIS PAGE INTENTIONALLY LEFT BLANK

#### Landscaping

#### RT3042 - 42 in. Standard Duty Rotary Tiller

**Equipment for Base Machine** 

Working Width: 42 in. Hitch: Limited Category 1 Tractor PTO HP Required: 15-35 hp

Side Drive: Gear Overall Dimensions: H 34.6 in. x W 47.4 in. x L 33

Weight: 463 lbs (Without Drive Shaft) PTO Shaft: Category 3 with Slip Clutch Input Speed: 540 RPM

Rotor Rotation: Forward

Offset: 3 in.
Tine Shape: "C"

Rotor Tines: 6 per Flange

Rotor Flanges: 5

Rotor Bearings: Ball Bearing in Oil Bath

Rotor RPM: 215
Skid Shoes: Standard, Adjustable
Maximum Tilling Depth: 7.5 in.
Warranty: 1 Year Whole Good / 3 Year Gearbox

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
16A1XF		RT3042 - 42 in. Standard Duty Rotary Tiller	2,064.00
		DESTINATION	
0202		UNITED STATES	No Added Cost
0184		CANADA	No Added Cost
0205		QUEBEC, CANADA	No Added Cost
		OPERATOR'S MANUAL AND DECALS	
0409		RT30 ENGLISH OM/DECAL KIT	No Added Cost
0413		RT30 FRENCH OM/DECAL KIT	No Added Cost
0437		RT30 SPANISH OM/DECAL KIT	No Added Cost
		ATTACHMENTS FOR FIELD CONVERSION	
	BLV11178	Miscellaneous John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the compatibility. One implement driveline yoke bundle is needed per implement, and remains with implement at all times (field install required).	275.00
	5MHF20020725	RT30 FRENCH OM/DECAL KIT	55.00
	5MHF20020726	RT30 SPANISH OM/DECAL KIT	55.00

Landscaping

### RT3042 - 42 in. Standard Duty Rotary Tiller Continued

TΙ	ΗІ	S	PA	GE	INT	ΈN	ITI(	DNAI	LLY L	_EFT	BLA	١N١	Κ

### Landscaping

### RT3042R - 42 in. Standard Duty Reverse Tine Rotary Tiller

Equipment for Base Machine

Working Width: 42 in. Hitch: Limited Category 1 Tractor PTO HP Required: 15-35 hp

Side Drive: Gear

Overall Dimensions: H 34.6 in. x W 47.4 in. x L 33

Weight: 478 lbs (Without Drive Shaft) PTO Shaft: Category 3 with Slip Clutch Input Speed: 540 RPM

Rotor Rotation: Reverse

Offset: 3 in.
Tine Shape: "C"

Rotor Tines: 6 per Flange

Rotor Flanges: 5

Rotor Bearings: Ball Bearing in Oil Bath

Rotor RPM: 215
Skid Shoes: Standard, Adjustable
Maximum Tilling Depth: 7.5 in.
Warranty: 1 Year Whole Good / 3 Year Gearbox

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
16B1XF		RT3042R - 42 in. Standard Duty Reverse Tine Rotary Tiller	2,485.00
		DESTINATION	
0202		UNITED STATES	No Added Cost
0184		CANADA	No Added Cost
0205		QUEBEC, CANADA	No Added Cost
		OPERATOR'S MANUAL AND DECALS	
0409		RT30 ENGLISH OM/DECAL KIT	No Added Cost
0413		RT30 FRENCH OM/DECAL KIT	No Added Cost
0437		RT30 SPANISH OM/DECAL KIT	No Added Cost
		ATTACHMENTS FOR FIELD CONVERSION	
	BLV11178	Miscellaneous John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the	275.00

compatibility. One implement driveline yoke bundle is needed per implement, and remains with

implement at all times (field install required).

5MHF20020725 RT30 FRENCH OM/DECAL KIT

5MHF20020726 RT30 SPANISH OM/DECAL KIT

55.00

Landscaping

RT3042R - 42 in. Standard Duty Reverse Tine Rotary Tiller Continued
THIS PAGE INTENTIONALLY LEFT BLANK

### Landscaping

### RT3049 - 49 in. Standard Rotary Tiller

**Equipment for Base Machine** 

Working Width: 49 in. Hitch: Limited Category 1 Tractor PTO HP Required: 15-35 hp

Side Drive: Gear

Overall Dimensions: H 34.6 in. x W 55.2 in. x L 33

5MHF20020726 RT30 SPANISH OM/DECAL KIT

Weight: lbs (Without Drive Shaft)
PTO Shaft: Category 3 with Slip Clutch
Input Speed: 540 RPM

Rotor Rotation: Forward

Offset: None Tine Shape: "C"

Rotor Tines: 6 per Flange

Rotor Flanges: 6

Rotor Bearings: Ball Bearing in Oil Bath

Rotor RPM: 215
Skid Shoes: Standard, Adjustable
Maximum Tilling Depth: 7.5 in.
Warranty: 1 Year Whole Good / 3 Year Gearbox

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
16C1XF		RT3049 - 49 in. Standard Rotary Tiller	2,443.00
		DESTINATION	
0202		UNITED STATES	No Added Cost
0184		CANADA	No Added Cost
0205		QUEBEC, CANADA	No Added Cost
		OPERATOR'S MANUAL AND DECALS	
0409		RT30 ENGLISH OM/DECAL KIT	No Added Cost
0413		RT30 FRENCH OM/DECAL KIT	No Added Cost
0437		RT30 SPANISH OM/DECAL KIT	No Added Cost
		ATTACHMENTS FOR FIELD CONVERSION	
	BLV11178	Miscellaneous John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the compatibility. One implement driveline yoke bundle is needed per implement, and remains with implement at all times (field install required).	275.00
	5MHF20020725	RT30 FRENCH OM/DECAL KIT	55.00
	-1445		

Landscaping

## RT3049 - 49 in. Standard Rotary Tiller Continued

### Landscaping

### RT3049R - 49 in. Standard Duty Reverse Tine Rotary Tiller

**Equipment for Base Machine** 

Working Width: 49 in. Hitch: Limited Category 1 Tractor PTO HP Required: 15-35 hp

Side Drive: Gear

Overall Dimensions: H 34.6 in. x W 55.2 in. x L 33

5MHF20020726 RT30 SPANISH OM/DECAL KIT

Weight: lbs (Without Drive Shaft)
PTO Shaft: Category 3 with Slip Clutch
Input Speed: 540 RPM

Rotor Rotation: Reverse

Offset: None Tine Shape: "C"

Rotor Tines: 6 per Flange

Rotor Flanges: 6

Rotor Bearings: Ball Bearing in Oil Bath

Rotor RPM: 215
Skid Shoes: Standard, Adjustable
Maximum Tilling Depth: 7.5 in.
Warranty: 1 Year Whole Good / 3 Year Gearbox

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
16D1XF		RT3049R - 49 in. Standard Duty Reverse Tine Rotary Tiller	2,805.00
		DESTINATION	
0202		UNITED STATES	No Added Cost
0184		CANADA	No Added Cost
0205		QUEBEC, CANADA	No Added Cost
		OPERATOR'S MANUAL AND DECALS	
0409		RT30 ENGLISH OM/DECAL KIT	No Added Cost
0413		RT30 FRENCH OM/DECAL KIT	No Added Cost
0437		RT30 SPANISH OM/DECAL KIT	No Added Cost
		ATTACHMENTS FOR FIELD CONVERSION	
	BLV11178	Miscellaneous John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the compatibility. One implement driveline yoke bundle is needed per implement, and remains with implement at all times (field install required).	275.00
	5MHF20020725	RT30 FRENCH OM/DECAL KIT	55.00
	-1445	DTSS CRANICUL CAUDECAN IVIT	

Landscaping

<u> </u>				
RT3049R - 49 in. Standard Duty Reverse Tine Rotary Tiller Continued				

### Landscaping

### RT3062 - 62 in. Standard Duty Rotary Tiller

**Equipment for Base Machine** 

Working Width: 62 in. Hitch: Category 1 Tractor PTO HP Required: 19-60 hp Side Drive: Gear

Overall Dimensions: H 39.1 in. x W 68.3 in. x L

5MHF20020725 RT30 FRENCH OM/DECAL KIT

5MHF20020726 RT30 SPANISH OM/DECAL KIT

33.9 in.

Weight: 668 lbs (Without Drive Shaft) PTO Shaft: Category 4 with Slip Clutch Input Speed: 540 RPM

Rotor Rotation: Forward

Offset: None Tine Shape: "C"

Rotor Tines: 6 per Flange

Rotor Flanges: 8

Rotor Bearings: Ball Bearing in Oil Bath

Rotor RPM: 215
Skid Shoes: Standard, Adjustable
Maximum Tilling Depth: 8.5 in.
Warranty: 1 Year Whole Good / 3 Year Gearbox

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
16E1XF		RT3062 - 62 in. Standard Duty Rotary Tiller	2,720.00
		DESTINATION	
0202		UNITED STATES	No Added Cost
0184		CANADA	No Added Cost
0205		QUEBEC, CANADA	No Added Cost
		OPERATOR'S MANUAL AND DECALS	
0409		RT30 ENGLISH OM/DECAL KIT	No Added Cost
0413		RT30 FRENCH OM/DECAL KIT	No Added Cost
0437		RT30 SPANISH OM/DECAL KIT	No Added Cost
		ATTACHMENTS FOR FIELD CONVERSION	
	BLV11202	Miscellaneous John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the compatibility. One implement driveline yoke bundle is needed per implement, and remains with implement at all times (field install required).	275.00

55.00

Landscaping

RT3062 - 62 in. Standard Duty Rotary	Tiller
Continued	

### Landscaping

### RT3062R - 62 in. Standard Duty Reverse Tine Rotary Tiller

Equipment for Base Machine

Working Width: 62 in. Hitch: Category 1 Tractor PTO HP Required: 19-60 hp Side Drive: Gear

Overall Dimensions: H 39.1 in. x W 68.3 in. x L

5MHF20020725 RT30 FRENCH OM/DECAL KIT

5MHF20020726 RT30 SPANISH OM/DECAL KIT

Weight: 688 lbs (Without Drive Shaft) PTO Shaft: Category 4 with Slip Clutch Input Speed: 540 RPM

Rotor Rotation: Reverse

Offset: None Tine Shape: "C"

Rotor Tines: 6 per Flange

Rotor Flanges: 8

Rotor Bearings: Ball Bearing in Oil Bath

Rotor RPM: 215
Skid Shoes: Standard, Adjustable
Maximum Tilling Depth: 8.5 in.
Warranty: 1 Year Whole Good / 3 Year Gearbox

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
16F1XF		RT3062R - 62 in. Standard Duty Reverse Tine Rotary Tiller	3,011.00
		DESTINATION	
0202		UNITED STATES	No Added Cost
0184		CANADA	No Added Cost
0205		QUEBEC, CANADA	No Added Cost
		OPERATOR'S MANUAL AND DECALS	
0409		RT30 ENGLISH OM/DECAL KIT	No Added Cost
0413		RT30 FRENCH OM/DECAL KIT	No Added Cost
0437		RT30 SPANISH OM/DECAL KIT	No Added Cost
	BLV11202	ATTACHMENTS FOR FIELD CONVERSION  Miscellaneous John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the	275.00
		compatibility. One implement driveline yoke bundle is needed per implement, and remains with implement at all times (field install required).	

55.00

Landscaping

RT3062R - 62 in. Standard Duty Reverse Tine Rotary Tiller
Continued
THIS PAGE INTENTIONALLY LEFT BLANK

### Landscaping

### RT3073 - 73 in. Standard Duty Rotary Tiller

**Equipment for Base Machine** 

Working Width: 73 in. Hitch: Category 1 & 2 Tractor PTO HP Required: 30-60 hp Side Drive: Gear

Overall Dimensions: H 39.1 in. x W 79.1 in. x L

5MHF20020725 RT30 FRENCH OM/DECAL KIT

5MHF20020726 RT30 SPANISH OM/DECAL KIT

Weight: 778 lbs (Without Drive Shaft)
PTO Shaft: Category 4 with Slip Clutch
Input Speed: 540 RPM

Rotor Rotation: Forward

Offset: None Tine Shape: "C"

Rotor Tines: 6 per Flange

Rotor Flanges: 9

Rotor Bearings: Ball Bearing in Oil Bath

Rotor RPM: 215
Skid Shoes: Standard, Adjustable
Maximum Tilling Depth: 8.5 in.
Warranty: 1 Year Whole Good / 3 Year Gearbox

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
16G1XF		RT3073 - 73 in. Standard Duty Rotary Tiller	3,068.00
		DESTINATION	
0202		UNITED STATES	No Added Cost
0184		CANADA	No Added Cost
0205		QUEBEC, CANADA	No Added Cost
		OPERATOR'S MANUAL AND DECALS	
0409		RT30 ENGLISH OM/DECAL KIT	No Added Cost
0413		RT30 FRENCH OM/DECAL KIT	No Added Cost
0437		RT30 SPANISH OM/DECAL KIT	No Added Cost
		ATTACHMENTS FOR FIELD CONVERSION	
	BLV11202	Miscellaneous John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the compatibility. One implement driveline yoke bundle is needed per implement, and remains with implement at all times (field install required).	275.00

55.00

Landscaping

RT3073 - 73 in. Standard Duty Rotary T	iller
THIS PAGE INTENTIONALLY LEFT BLA	ANK

### Landscaping

### RT3073R - 73 in. Standard Duty Reverse Tine Rotary Tiller

**Equipment for Base Machine** 

Working Width: 73 in. Hitch: Category 1 & 2 Tractor PTO HP Required: 30-60 hp Side Drive: Gear

Overall Dimensions: H 39.1 in. x W 79.1 in. x L

5MHF20020726 RT30 SPANISH OM/DECAL KIT

Weight: 800 lbs (Without Drive Shaft)
PTO Shaft: Category 4 with Slip Clutch
Input Speed: 540 RPM

Rotor Rotation: Reverse

Offset: None Tine Shape: "C"

Rotor Tines: 6 per Flange

Rotor Flanges: 9

Rotor Bearings: Ball Bearing in Oil Bath

Rotor RPM: 215
Skid Shoes: Standard, Adjustable
Maximum Tilling Depth: 8.5 in.
Warranty: 1 Year Whole Good / 3 Year Gearbox

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
16J1XF		RT3073R - 73 in. Standard Duty Reverse Tine Rotary Tiller	3,318.00
		DESTINATION	
0202		UNITED STATES	No Added Cost
0184		CANADA	No Added Cost
0205		QUEBEC, CANADA	No Added Cost
		OPERATOR'S MANUAL AND DECALS	
0409		RT30 ENGLISH OM/DECAL KIT	No Added Cost
0413		RT30 FRENCH OM/DECAL KIT	No Added Cost
0437		RT30 SPANISH OM/DECAL KIT	No Added Cost
		ATTACHMENTS FOR FIELD CONVERSION	
	BLV11202	Miscellaneous John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the compatibility. One implement driveline yoke bundle is needed per implement, and remains with implement at all times (field install required).	275.00
	5MHF20020725	RT30 FRENCH OM/DECAL KIT	55.00
		DTO CRANCH CAUDEON WIT	

Landscaping

RT3073R - 73 in. Standard Duty Reverse Tine Rotary Tiller Continued					

### . . .

### Landscaping

### SP2048B - 4 Ft. Standard Duty Soil Pulverizer - Bar Type

Equipment for Base Machine

3-Point Hitch: Category I
Working Width: 48 In.
Tractor HP (Maximum): 30 to 45 HP
Approximate Shipping Weight: 550 lbs.
Scarifying Teeth - Rear:
(8) 1/2 In x 2 In. Bar Type
Scarifying Teeth - Front:
(9) 1/2 In. x 2 In. Bar Type
Roller Pins: 70
Roller Pin Size: 3/8 In. x 1 In.
Roller Diameter: 5-9/16 In.
Height: 39 In.
H-Beam Dimensions: 10 In. x 10 In.

5BP0099887

Second Roller Assembly (SP2048B)

5 In. diameter.

Duty: Standard Duty Compression Springs: (2) 160 lbs. Assembly/Set-Up Time: 10 Minutes (Approximate) Approximate Operating Weight: 496 lbs. 2nd Roller Assembly 48 In.: Optional

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1401XF		BASE MACHINE  SP2048B - 4 Ft. Standard Duty Soil Pulverizer - Bar Type	2,413.00
. 10 17 11			2,
9000		SECOND ROLLER ASSEMBLY Second Roller Assembly SP2048B 5 In. diameter.	423.00
		ATTACHMENTS FOR FIELD CONVERSION	
		Miscellaneous	

Landscaping

# SP2048B - 4 Ft. Standard Duty Soil Pulverizer - Bar Type Continued

### Landscaping

### SP2060B - 5 Ft. Standard Duty Soil Pulverizer - Bar Type

Equipment for Base Machine

3-Point Hitch: Category I
Working Width: 60 In.
Tractor HP (Maximum): 30 to 45 HP
Approximate Shipping Weight: 702 lbs.
Scarifying Teeth - Rear:
(10) 1/2 In. x 2 In. Bar Type
Scarifying Teeth - Front:
(11) 1/2 In. x 2 In. Bar Type
Roller Pins: 88
Roller Pin Size: 3/8 In. x 1 In.
Roller Diameter: 5-9/16 In.
Height: 39 In.
H-Beam Dimensions: 10 In. x 10 In.

5BP0099636

Second Roller Assembly (SP2060B)

5 In. diameter.

Duty: Standard Duty Compression Springs: (2) 160 lbs. Assembly/Set-Up Time: 10 Minutes (Approximate) Approximate Operating Weight: 652 lbs. 2nd Roller Assembly 60 In.: Optional

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1403XF		BASE MACHINE  SP2060B - 5 Ft. Standard Duty Soil Pulverizer - Bar Type	2,527.00
		SECOND ROLLER ASSEMBLY	
9000		Second Roller Assembly SP2060B 5 In. diameter.	527.00
		ATTACHMENTS FOR FIELD CONVERSION	
		Miscellaneous	

Landscaping

SP2060B - 5 Ft. Standard Duty Soil Pulverizer - Bar Type Continued
Continued
THIS PAGE INTENTIONALLY LEFT BLANK

### Landscaping

### SP2072B - 6 Ft. Standard Duty Soil Pulverizer - Bar Type

Equipment for Base Machine

3-Point Hitch: Category I
Working Width: 72 In.
Tractor HP (Maximum): 30 to 45 HP
Approximate Shipping Weight: 729 lbs.
Scarifying Teeth - Rear:
(12) 1/2 In. x 2 In. Bar Type
Scarifying Teeth - Front:
(13) 1/2 In. x 2 In. Bar Type
Roller Pins: 106
Roller Pin Size: 3/8 In. x 1 In.
Roller Diameter: 5-9/16 In.
Height: 39 In.
H-Beam Dimensions: 10 In. x 10 In.

5BP0099637

Second Roller Assembly (SP2072B)

5 In. diameter.

Duty: Standard Duty Compression Springs: (2) 160 lbs. Assembly/Set-Up Time: 10 Minutes (Approximate) Approximate Operating Weight: 679 lbs. 2nd Roller Assembly 72 In.: Optional

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1402XF		BASE MACHINE  SP2072B - 6 Ft. Standard Duty Soil Pulverizer - Bar Type	2,667.00
1402/1		Gr 2072B - Gr t. Standard Buty Golf Full diverses - Bai Type	2,007.00
		SECOND ROLLER ASSEMBLY	
9000		Second Roller Assembly SP2072B 5 In. diameter.	747.00
		ATTACHMENTS FOR FIELD CONVERSION	
		Miscellaneous	

Landscaping

SP2072B - 6 Ft. Standa	rd Duty Soil Pulverizer - Bar Type Continued	

### Landscaping

### SP2272B - 6 Ft. Heavy Duty Soil Pulverizer - Bar Type

**Equipment for Base Machine** 

3-Point Hitch: Category I
Working Width: 72 In.
Tractor HP (Maximum): 30 to 70 HP
Shipping Weight: 846 lbs.
Scarifying Teeth - Rear:
(12) 1/2 In. x 2 In. Bar Type
Scarifying Teeth - Front:
(13) 1/2 In. x 2 In. Bar Type
Roller Pins: 106
Roller Pin Size: 3/8 In. x 1 In.
Roller Diameter: 6-5/8 In.
Height: 39 In.
H-Beam Dimensions: 12 In. x 11.5 In.

5BP0099646

Second Roller Assembly (SP2272B)

5-9/16 In. diameter.

Duty: Heavy Duty Compression Springs: (2) 160 lbs. Assembly/Set-Up Time: 10 Minutes (Approximate) Approximate Operating Weight: 781 lbs. 2nd Roller Assembly 72 In.: Optional

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1411XF		BASE MACHINE  SP2272B - 6 Ft. Heavy Duty Soil Pulverizer - Bar Type	3,283.00
14117		SP2272B - 6 Ft. Heavy Duty Soil Pulverizer - Dai Type	3,263.00
		SECOND ROLLER ASSEMBLY	
9000		Second Roller Assembly SP2272B 5-9/16 In. diameter.	952.00
		ATTACHMENTS FOR FIELD CONVERSION	
		Miscellaneous	

Landscaping

## SP2272B - 6 Ft. Heavy Duty Soil Pulverizer - Bar Type Continued

### Landscaping

### SP2284B - 7 Ft. Heavy Duty Soil Pulverizer - Bar Type

**Equipment for Base Machine** 

3-Point Hitch: Category I
Working Width: 84 In.
Tractor HP (Maximum): 30 to 70 HP
Shipping Weight: 940 lbs.
Scarifying Teeth - Rear:
(14) 1/2 In. x 2 In. Bar Type
Scarifying Teeth - Front:
(15) 1/2 In. x 2 In. Bar Type
Roller Pins: 124
Roller Pin Size: 3/8 In. x 1 In.
Roller Diameter: 6-5/8 In.
Height: 39 In.
H-Beam Dimensions: 12 In. x 11.5 In.

5BP0099647

Second Roller Assembly (SP2284B)

5-9/16 In. diameter.

Duty: Heavy Duty Compression Springs: (2) 160 lbs. Assembly/Set-Up Time: 10 Minutes (Approximate) Approximate Operating Weight: 875 lbs. 2nd Roller Assembly 84 In.: Optional

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1412XF		BASE MACHINE  SP2284B - 7 Ft. Heavy Duty Soil Pulverizer - Bar Type	3,508.00
		SECOND ROLLER ASSEMBLY	<u> </u>
9000		Second Roller Assembly SP2284B 5-9/16 In. diameter.	1,018.00
		ATTACHMENTS FOR FIELD CONVERSION	
		Miscellaneous	

1,056.00

Landscaping

## SP2284B - 7 Ft. Heavy Duty Soil Pulverizer - Bar Type Continued

### Landscaping

### SS1022B Broadcast Spreader - Pull Type Hitch

**Equipment for Base Machine** 

Hopper Material: Steel
Hopper Weight Capacity: 226 lbs.
Hopper Volume Capacity: 3.5 Cubic Ft.
Machine Weight: 62 lbs.
Shipping Weight (Per Pair): 200 lbs.
Swath Spread: 20 Ft.
Hopper Width: 32 In.
Hopper Height: 39.6 In.
Tractor PTO HP Range: 16-30 HP
PTO RPM: NA (Ground Driven)
PTO Shaft Category (Heavy Duty

Shielded 1-3/8 In.): NA (Ground Driven) 3-Point Hitch Category: Single Point iMatch Compatible Note: Must be Ordered from Factory as iMatch: NA (Single Point Hitch) iMatch Compatible: No

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3061XF		SS1022B Broadcast Spreader - Pull Type Hitch 226 lb. capacity. Order in multiples of two.	905.00
		HOPPER COVER	
9010		Hopper Cover SS1022B and SS1023B	282.00
		DEFLECTOR SHIELD	
9070		Deflector Shield SS1022B and SS1035B	112.00
		REMOTE GATE CONTROL	
9080		Remote Gate Control SS1022B, SS1023B and SS1035B	401.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5BPAA1120	Miscellaneous Deflector Shield (SS1022B/SS1035B)	116.60
	5BP0099720	Hopper Cover (SS1022B/SS1023B)	292.60
	5BP0099856	Remote Gate Control (SS1022B/SS1023B/SS1035B)	415.80

Landscaping

## SS1022B Broadcast Spreader - Pull Type Hitch Continued

**List Price** 

### FRONTIER PRODUCTS

### Landscaping

### SS1023B Broadcast Spreader - 3-Point PTO Category I Non-iMatch

**Equipment for Base Machine** 

Hopper Material: Steel
Hopper Weight Capacity: 226 lbs.
Hopper Volume Capacity: 3.5 Cubic Ft.
Machine Weight: 81 lbs.
Shipping Weight (Per Pair): 232 lbs.
Swath Spread: 23 Ft.
Hopper Width: 32 In.
Hopper Height: 31 In.
Tractor PTO HP Range: 16-30 HP
PTO RPM: 540 RPM

PTO Shaft Category I (Heavy Duty

Shielded 1-3/8 In.) 3-Point Hitch: Category 0 and I iMatch Compatible Note: Must be Ordered from Factory as iMatch: NA (Single Point Hitch) iMatch Compatible: No

Code	Attachment Identifier	Description	Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3062XF		SS1023B Broadcast Spreader - 3-Point PTO Category I Non-iMatch 226 lb. capacity. Order in multiples of two.	897.00
		HOPPER COVER	
9010		Hopper Cover SS1022B and SS1023B	282.00
		DEFLECTOR SHIELD	
9070		Deflector Shield SS1023B, SS1036B and SS2036B	114.00
		REMOTE GATE CONTROL	
9080		Remote Gate Control SS1022B, SS1023B and SS1035B	401.00
		TUMBLING WHEEL AGITATOR	
9090		Tumbling Wheel Agitator (SS1023B) SS1023B	89.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP0099524	Miscellaneous Deflector Shield (SS1023B/SS1036B/SS2036B)	115.51
	5BP0099720	Hopper Cover (SS1022B/SS1023B)	292.60

### Landscaping

### SS1023B Broadcast Spreader - 3-Point PTO Category I Non-iMatch Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
	BLV11177	ATTACHMENTS FOR FIELD CONVERSIONContinued John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the compatibility. One implement driveline yoke bundle is needed per implement, and remains with implement at all times (field install required).	275.00
	5BP0099856	Remote Gate Control (SS1022B/SS1023B/SS1035B)	415.80
	5BP0099979	Tumbling Style Wheel Agitator (SS1023B)	92.40

### Landscaping

### SS1035B Broadcast Spreader - Pull Type Hitch

**Equipment for Base Machine** 

Hopper Material: Steel
Hopper Weight Capacity: 362 lbs.
Hopper Volume Capacity: 5.6 Cubic Ft.
Machine Weight: 84 lbs.
Shipping Weight (Per Pair): 250 lbs.
Swath Spread: 20 Ft.
Hopper Width: 35 In.
Hopper Height: 45 In.
Tractor PTO HP Range: 16-45 HP
PTO RPM: NA (Ground Driven)
PTO Shaft Category (Heavy Duty

Shielded 1-3/8 In.): NA (Ground Driven) 3-Point Hitch Category: NA (Single Point Hitch) iMatch Compatible Note: Must be Ordered from Factory as iMatch: NA (Single Point Hitch) iMatch Compatible: No

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3068XF		SS1035B Broadcast Spreader - Pull Type Hitch 362 lb. capacity. Order in multiples of two.	1,213.00
		HOPPER COVER	
9010		Hopper Cover SS1035B, SS1036B and SS2036B	294.00
		DEFLECTOR SHIELD	
9070		Deflector Shield SS1022B and SS1035B	112.00
		REMOTE GATE CONTROL	
9080		Remote Gate Control SS1022B, SS1023B and SS1035B	401.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5BPAA1120	Miscellaneous Deflector Shield (SS1022B/SS1035B)	116.60
	5BP0099721	Hopper Cover (SS1035B/SS1036B/SS2036B)	295.91
	5BP0099856	Remote Gate Control (SS1022B/SS1023B/SS1035B)	415.80

Landscaping

SS1035B Broadcast Spreader - Pull Type Hitch Continued				

Liet Dries

### FRONTIER PRODUCTS

### Landscaping

### SS1036B Broadcast Spreader - 3-Point PTO Category I Non-iMatch

**Equipment for Base Machine** 

Hopper Material: Steel
Hopper Weight Capacity: 362 lbs.
Hopper Volume Capacity: 5.6 Cubic Ft.
Machine Weight: 102 lbs.
Shipping Weight (Per Pair): 290 lbs.
Swath Spread: 23 Ft.
Hopper Width: 35 In.
Hopper Height: 34 In.
Tractor PTO HP Range: 16-45 HP Tractor PTO HP Range: 16-45 HP PTO RPM: 540 RPM

PTO Shaft Category I (Heavy Duty

Shielded 1-3/8 In.) 3-Point Hitch: Category 0 and I iMatch Compatible Note: Must be Ordered from Factory as iMatch: No (Single Point hitch) iMatch Compatible: No

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3069XF		SS1036B Broadcast Spreader - 3-Point PTO Category I Non-iMatch 362 lb. capacity. Order in multiples of two.	937.00
		HOPPER COVER	
9010		Hopper Cover SS1035B, SS1036B and SS2036B	294.00
		DEFLECTOR SHIELD	
9070		Deflector Shield SS1023B, SS1036B and SS2036B	114.00
		REMOTE GATE CONTROL	
9080		Remote Gate Control SS1036B, SS2036B, SS1067B and SS2067B	401.00
		TUMBLING WHEEL AGITATOR	
9090		Tumbling Wheel Agitator (SS1023B) SS1036B, SS2036B, SS1067B and SS2067B	89.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP0099524	Miscellaneous Deflector Shield (SS1023B/SS1036B/SS2036B)	115.51
	5BP0099721	Hopper Cover (SS1035B/SS1036B/SS2036B)	295.91

### Landscaping

### SS1036B Broadcast Spreader - 3-Point PTO Category I Non-iMatch Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
	BLV11177	ATTACHMENTS FOR FIELD CONVERSIONContinued John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the compatibility. One implement driveline yoke bundle is needed per implement, and remains with implement at all times (field install required).	275.00
	5BP0099850	Remote Gate Control (SS1036B/SS2036B/SS1067B/SS2067B)	415.80
	5BP0099978	Tumbling Style Wheel Agitator (SS1036B/SS2036B/SS1067B/SS2067B)	92.40

### Landscaping

### SS1067B Broadcast Spreader - 3-Point PTO Category I

Equipment for Base Machine

Hopper Material: Steel
Hopper Weight Capacity: 678 lbs.
Hopper Volume Capacity: 10.6 Cubic Ft.
Machine Weight: 125 lbs.
Shipping Weight (Per Pair): 320 lbs.
Swath Spread: 46 Ft.
Hopper Width: 42 In.
Hopper Height: 40 In.
Tractor PTO HP Range: 16-55 HP
PTO RPM: 540 RPM
PTO Shaft Category I (Heavy Duty

Shielded 1-3/8 In.) 3-Point Hitch: Category I iMatch Compatible (Note: Must be Ordered from Factory as iMatch): Optional

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3063XF		SS1067B Broadcast Spreader - 3-Point PTO Category I 678 lb. capacity. Order in multiples of two.	1,018.00
		AMS I-FEATURES	
1000		iMatch Compatible  Leave quantity blank. The system will automatically populate the correct quantity.	10.00
1010		Non-iMatch Compatible Leave quantity blank. The system will automatically populate the correct quantity.	In Base Price
		HOPPER COVER	
9010		Hopper Cover SS1067B and SS2067B	300.00
0070		DEFLECTOR SHIELD	040.00
9070		Deflector Shield SS1067B and SS2067B	218.00
		REMOTE GATE CONTROL	404.00
9080		Remote Gate Control SS1036B, SS2036B, SS1067B and SS2067B	401.00
		TUMBLING WHEEL AGITATOR	
9090		Tumbling Wheel Agitator (SS1023B) SS1036B, SS2036B, SS1067B and SS2067B	89.00
		SIDEROW DISCHARGE	
9100		Siderow Discharge (SS1067B and SS2067B)	458.00

### Landscaping

### SS1067B Broadcast Spreader - 3-Point PTO Category I

Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		SIDEROW DISCHARGEContinued	
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP0099638	Miscellaneous Deflector Shield (SS1067B/SS2067B)	220.00
	5BP0099722	Hopper Cover (SS1067B, SS2067B, andSS1079P with 9Ft. Hopper)	302.51
	BLV11177	John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the compatibility. One implement driveline yoke bundle is needed per implement, and remains with implement at all times (field install required).	275.00
	5BP0099850	Remote Gate Control (SS1036B/SS2036B/SS1067B/SS2067B)	415.80
	5BP0099458	Siderow Discharge (SS1067B/SS2067B)	475.20
	5BP0099978	Tumbling Style Wheel Agitator (SS1036B/SS2036B/SS1067B/SS2067B)	92.40

**List Price** 

### FRONTIER PRODUCTS

### Landscaping

### SS2036B Broadcast Spreader - Poly Hopper - 3-Point PTO Category I Non-iMatch

**Equipment for Base Machine** 

Hopper Material: Polyethylene
Hopper Weight Capacity: 362 lbs.
Hopper Volume Capacity: 5.6 Cubic Ft.
Machine Weight: 102 lbs.
Shipping Weight (Per Pair): 290 lbs.
Swath Spread: 23 Ft.
Hopper Width: 35 In.
Hopper Height: 34 In.
Tractor PTO HP Range: 16-45 HP
PTO RPM: 540 RPM
PTO Shaft Category I (Heavy Duty

Shielded 1-3/8 In.)
3-Point Hitch: Category 0 and I
iMatch Compatible Note: Must be Ordered from
Factory as iMatch: No
(Single Point hitch) iMatch Compatible: No

Code	Attachment Identifier	Description	Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3071XF		SS2036B Broadcast Spreader - Poly Hopper - 3-Point PTO Category I Non-iMatch Stainless steel bottom and nylon spreading disc. 362 lb. capacity. Order in multiples of two.	1,128.00
		HOPPER COVER	
9010		Hopper Cover SS1035B, SS1036B and SS2036B	285.00
		DEFLECTOR SHIELD	
9070		Deflector Shield SS1023B, SS1036B and SS2036B	111.00
		REMOTE GATE CONTROL	
9080		Remote Gate Control SS1036B, SS2036B, SS1067B and SS2067B	401.00
		TUMBLING WHEEL AGITATOR	
9090		Tumbling Wheel Agitator (SS1023B) SS1036B, SS2036B, SS1067B and SS2067B	89.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP0099524	Miscellaneous Deflector Shield (SS1023B/SS1036B/SS2036B)	115.51
	5BP0099721	Hopper Cover (SS1035B/SS1036B/SS2036B)	295.91

### Landscaping

### SS2036B Broadcast Spreader - Poly Hopper - 3-Point PTO Category I Non-iMatch Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
	BLV11177	ATTACHMENTS FOR FIELD CONVERSIONContinued John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the compatibility.One implement driveline yoke bundle is needed per implement, and remains with implement at all times (field install required).	275.00
	5BP0099850	Remote Gate Control (SS1036B/SS2036B/SS1067B/SS2067B)	415.80
	5BP0099978	Tumbling Style Wheel Agitator (SS1036B/SS2036B/SS1067B/SS2067B)	92.40

Liet Dries

#### ·

#### Landscaping

#### SS2067B Broadcast Spreader - Poly Hopper - 3-Point PTO Category I

Equipment for Base Machine

Hopper Material: Polyethylene
Hopper Weight Capacity: 678 lbs.
Hopper Volume Capacity: 10.6 Cubic Ft.
Machine Weight: 125 lbs.
Shipping Weight (Per Pair): 320 lbs.
Swath Spread: 46 Ft.
Hopper Width: 42 In.
Hopper Height: 40 In.
Tractor PTO HP Range: 16-55 HP
PTO RPM: 540 RPM
PTO Shaft Category I (Heavy Duty

Shielded 1-3/8 In.) 3-Point Hitch: Category 1 iMatch Compatible (Note: Must be Ordered from Factory as iMatch): Optional

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	]
		BASE MACHINE	
3072XF		SS2067B Broadcast Spreader - Poly Hopper - 3-Point PTO Category I Stainless steel bottom and spreading disc. 678 lb. capacity. Order in multiples of two.	1,466.00
		AMS I-FEATURES	
1000		iMatch Compatible Leave quantity blank. The system will automatically populate the correct quantity.	10.00
1010		Non-iMatch Compatible  Leave quantity blank. The system will automatically populate the correct quantity.	In Base Price
9010		HOPPER COVER Hopper Cover SS1067B and SS2067B	292.00
9070		DEFLECTOR SHIELD  Deflector Shield  SS1067B and SS2067B	212.00
9080		REMOTE GATE CONTROL Remote Gate Control SS1036B, SS2036B, SS1067B and SS2067B	401.00
9090		TUMBLING WHEEL AGITATOR Tumbling Wheel Agitator (SS1023B) SS1036B, SS2036B, SS1067B and SS2067B	89.00
9100		SIDEROW DISCHARGE Siderow Discharge (SS1067B and SS2067B)	458.00

#### SS2067B Broadcast Spreader - Poly Hopper - 3-Point PTO Category I Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		SIDEROW DISCHARGEContinued	
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP0099638	Miscellaneous Deflector Shield (SS1067B/SS2067B)	220.00
	5BP0099722	Hopper Cover (SS1067B, SS2067B, andSS1079P with 9Ft. Hopper)	302.51
	BLV11177	John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the compatibility. One implement driveline yoke bundle is needed per implement, and remains with implement at all times (field install required).	275.00
	5BP0099850	Remote Gate Control (SS1036B/SS2036B/SS1067B/SS2067B)	415.80
	5BP0099458	Siderow Discharge (SS1067B/SS2067B)	475.20
	5BP0099978	Tumbling Style Wheel Agitator (SS1036B/SS2036B/SS1067B/SS2067B)	92.40

#### SS1079P Pendular Spreader - 3-Point PTO Category I

**Equipment for Base Machine** 

Hopper Weight Capacity: 576 or 820 lbs. Hopper Volume Capacity: 9 Cubic Ft. or 12.8 Cubic

3-Point Hitch: Category I iMatch Compatible: Yes

Machine Weight: 250 lbs. Swath Spread Range: 17-47 Ft. Load Height: 43 In. Tractor HP Range: 20-60 HP PTO RPM: 540 RPM

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3064XF		SS1079P Pendular Spreader - 3-Point PTO Category I	3,009.00
		HOPPER SIZE	
6900		9 Cu. Ft. Hopper (SS1079P)	In Base Price
6912		12.8 Cu. Ft. Hopper (SS1079P)	378.00
		HOPPER COVER	
9551		Hopper Cover (SS1079P with 9 Ft. Hopper)	283.00
9550		Hopper Cover (SS1079P with 12 Ft. Hopper)	293.00
		AGITATOR EXTENSION	
9000		Agitator Extension SS1079P	195.00
		SALT AND SAND SPOUT	
9020		Salt and Sand Spout (SS1079P, SS1116P, SS1180P and SS1220P)	334.00
		RUBBER INSERT	
9030		Rubber Insert (SS1079P, SS1116P, SS1180P and SS1220P)	120.00
		LEFT-RIGHT DIRECTIONAL ATTACHMENT CONVERSION KIT	
9040		L/R Direct Att (SS1079P, SS1116P, SS1180P and SS1220P)	81.00
		LOCK NUT FOR SPOUT	
9110		Lock Nut for Spout (SS1079P, SS1116P, SS1180P, SS1220P)	54.00
		HYDRAULIC GATE CONTROL	
9050		Hydraulic Gate Control (SS1079P, SS1116P, SS1180P and SS1220P)	752.00
		FILTER GRATE	
9060		Filter Grate	516.00

#### SS1079P Pendular Spreader - 3-Point PTO Category I

Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		FILTER GRATEContinued  SS1079P	
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP0099453	Miscellaneous Agitator Extension (SS1079P)	202.40
	5BP0099913	Filter Grate (SS1079P)	535.71
	5BP0099722	Hopper Cover (SS1067B, SS2067B, andSS1079P with 9Ft. Hopper)	302.51
	5BP0099723	Hopper Cover (SS1079P with 12 Ft. Hopper)	303.60
	5BP0099456	Hydraulic Gate Control (SS1079P)	779.91
	BLV11177	John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the compatibility. One implement driveline yoke bundle is needed per implement, and remains with implement at all times (field install required).	275.00
	5BP0095370	Left/Right Directional Attachment	83.60
	5BP0014984	Lock Nut for Spout (SS1079P, SS1116P, SS1180P, SS1220P)	56.11
	5BP0099451	Rubber Insert	124.31
	5BP0099452	Salt and Sand Spout	346.51

### SS1116P Pendular Spreader - 3-Point PTO Category I or II

Equipment for Base Machine

Hopper Weight Capacity: 1168 lbs. Hopper Volume Capacity: 22.5 Cubic Ft. Machine Weight: 321 lbs. Swath Spread Range: 17-47 Ft. Load Height: 38 Tm

Load Height: 38 In. Tractor HP Range: 20-60 HP PTO RPM: 540 RPM

Three Point Hitch: Category I or II

iMatch Compatible: No

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3065XF		SS1116P Pendular Spreader - 3-Point PTO Category I or II 1168 lb. capacity.	4,024.00
		HOPPER COVER	
9010		Hopper Cover SS1116P	340.00
9000		AGITATOR EXTENSION Agitator Extension SS1116P, SS1180P and SS1220P	195.00
9020		SALT AND SAND SPOUT Salt and Sand Spout (SS1079P, SS1116P, SS1180P and SS1220P)	334.00
9030		RUBBER INSERT Rubber Insert (SS1079P, SS1116P, SS1180P and SS1220P)	120.00
9040		LEFT-RIGHT DIRECTIONAL ATTACHMENT CONVERSION KIT L/R Direct Att (SS1079P, SS1116P, SS1180P and SS1220P)	81.00
9110		LOCK NUT FOR SPOUT Lock Nut for Spout (SS1079P, SS1116P, SS1180P, SS1220P)	54.00
9050		HYDRAULIC GATE CONTROL  Hydraulic Gate Control (SS1079P, SS1116P, SS1180P and SS1220P)	752.00
9060		FILTER GRATE Filter Grate SS1116P, SS1180P and SS1220P	466.00

5BP0099452

Salt and Sand Spout

346.51

## Landscaping

#### SS1116P Pendular Spreader - 3-Point PTO Category I or II Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP0099454	Miscellaneous Agitator Extension (SS1116P/SS1180P/SS1220P)	202.40
	5BP0095410	Filter Grill (SS1116P/SS1180P/SS1220P)	484.00
	5BP0099725	Hopper Cover (SS1116P)	353.11
	5BP0099457	Hydraulic Control (SS1116P/SS1180P/SS1220P)	779.91
	BLV11177	John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the compatibility. One implement driveline yoke bundle is needed per implement, and remains with implement at all times (field install required).	275.00
	5BP0095370	Left/Right Directional Attachment	83.60
	5BP0014984	Lock Nut for Spout (SS1079P, SS1116P, SS1180P, SS1220P)	56.11
	5BP0099451	Rubber Insert	124.31

#### SS1180P Pendular Spreader - 3-Point PTO Category I or II

Equipment for Base Machine

Hopper Weight Capacity: 1808 lbs. Hopper Volume Capacity: 34.7 Cubic Ft. Machine Weight: 339 lbs. Swath Spread Range: 17-47 Ft. Load Height: 42 Tp.

Load Height: 43 In. Tractor HP Range: 20-60 HP PTO RPM: 540 RPM

Three Point Hitch: Category I or II

iMatch Compatible: No

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3066XF		SS1180P Pendular Spreader - 3-Point PTO Category I or II 1808 lb. capacity.	4,654.00
		HOPPER COVER	
9010		Hopper Cover For SS1180P.	349.00
		AGITATOR EXTENSION	
9000		Agitator Extension SS1116P, SS1180P and SS1220P	195.00
		SALT AND SAND SPOUT	
9020		Salt and Sand Spout (SS1079P, SS1116P, SS1180P and SS1220P)	334.00
		RUBBER INSERT	
9030		Rubber Insert (SS1079P, SS1116P, SS1180P and SS1220P)	120.00
9040		LEFT-RIGHT DIRECTIONAL ATTACHMENT CONVERSION KIT L/R Direct Att (SS1079P, SS1116P, SS1180P and SS1220P)	81.00
		LOCK NUT FOR SPOUT	
9110		Lock Nut for Spout (SS1079P, SS1116P, SS1180P, SS1220P)	54.00
9050		HYDRAULIC GATE CONTROL Hydraulic Gate Control (SS1079P, SS1116P, SS1180P and SS1220P)	752.00
		FILTER GRATE	
9060		Filter Grate SS1116P, SS1180P and SS1220P	466.00

5BP0099452

Salt and Sand Spout

346.51

## Landscaping

#### SS1180P Pendular Spreader - 3-Point PTO Category I or II Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP0099454	Miscellaneous Agitator Extension (SS1116P/SS1180P/SS1220P)	202.40
	5BP0095410	Filter Grill (SS1116P/SS1180P/SS1220P)	484.00
	5BP0099726	Hopper Cover (SS1180P)	361.91
	5BP0099457	Hydraulic Control (SS1116P/SS1180P/SS1220P)	779.91
	BLV11177	John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the compatibility. One implement driveline yoke bundle is needed per implement, and remains with implement at all times (field install required).	275.00
	5BP0095370	Left/Right Directional Attachment	83.60
	5BP0014984	Lock Nut for Spout (SS1079P, SS1116P, SS1180P, SS1220P)	56.11
	5BP0099451	Rubber Insert	124.31

#### SS1220P Pendular Spreader - 3-Point PTO Category I or II

Equipment for Base Machine

Hopper Weight Capacity: 2205 lbs.
Hopper Volume Capacity: 42.4 Cubic Ft.
Machine Weight: 343 lbs.
Swath Spread Range: 17-47 Ft.
Load Height: 47 In.
Tractor HP Range: 20-60 HP
PTO RPM: 540 RPM
Three Point Hitch: Category I or IT

Three Point Hitch: Category I or II

iMatch Compatible: No

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3067XF		SS1220P Pendular Spreader - 3-Point PTO Category I or II 2205 lb. capacity.	5,136.00
		HOPPER COVER	
9010		Hopper Cover For SS1120P.	366.00
9000		AGITATOR EXTENSION Agitator Extension SS1116P, SS1180P and SS1220P	195.00
9020		SALT AND SAND SPOUT Salt and Sand Spout (SS1079P, SS1116P, SS1180P and SS1220P)	334.00
9030		RUBBER INSERT Rubber Insert (SS1079P, SS1116P, SS1180P and SS1220P)	120.00
9040		LEFT-RIGHT DIRECTIONAL ATTACHMENT CONVERSION KIT L/R Direct Att (SS1079P, SS1116P, SS1180P and SS1220P)	81.00
9110		LOCK NUT FOR SPOUT Lock Nut for Spout (SS1079P, SS1116P, SS1180P, SS1220P)	54.00
9050		HYDRAULIC GATE CONTROL  Hydraulic Gate Control (SS1079P, SS1116P, SS1180P and SS1220P)	752.00
9060		FILTER GRATE Filter Grate SS1116P, SS1180P and SS1220P	466.00

#### SS1220P Pendular Spreader - 3-Point PTO Category I or II Continued

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP0099454	Miscellaneous Agitator Extension (SS1116P/SS1180P/SS1220P)	202.40
	5BP0095410	Filter Grill (SS1116P/SS1180P/SS1220P)	484.00
	5BP0099727	Hopper Cover (SS1220P)	379.51
	5BP0099457	Hydraulic Control (SS1116P/SS1180P/SS1220P)	779.91
	BLV11177	John Deere Quik-Knect Driveline Yoke Bundle Tractor Receiver Part number: BLV10953At least one tractor receiver bundle is needed per tractor. This bundle is removable and can be used on various tractors within the compatibility. One implement driveline yoke bundle is needed per implement, and remains with implement at all times (field install required).	275.00
	5BP0095370	Left/Right Directional Attachment	83.60
	5BP0014984	Lock Nut for Spout (SS1079P, SS1116P, SS1180P, SS1220P)	56.11
	5BP0099451	Rubber Insert	124.31
	5BP0099452	Salt and Sand Spout	346.51

#### Landscaping

## SS3067B Broadcast Spreader - Poly Hopper - 3-Point PTO Category I Non-iMatch

Equipment for Base Machine

Hopper Material: Polyethylene
Hopper Weight Capacity: 860 lbs.
Hopper Volume Capacity: 10 Cubic Ft.
Machine Weight: 128 lbs.
Shipping Weight (Per Pair): 300 lbs.
Swath Spread: 49 Ft.
Hopper Width: 42 In.
Hopper Height: 42 In.
Tractor PTO HP Range: 20-60 HP
PTO RPM: 540 RPM
PTO Shaft Category I (Heavy Duty

Shielded 1-3/8 In.) 3-Point Hitch: Category 1 iMatch Compatible: No Ships to dealer assembled

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1621XF		SS3067B Broadcast Spreader - Poly Hopper - 3-Point PTO Category I Non-iMatch Order in multiples of two.	914.00

Attachment Information is not available in MOCI for the base code 1621XF

SS3067B Broadcast Spreade	r - Poly Hopper - 3-P	oint PTO Category I	Non-iMatch
	Continued		

ΤI	ΗІ	S	PA	GE	INT	ΈN	JTI(	ANC	LLY I	LEFT	BLA	١N٨	Κ

#### **PS1001 Integral Subsoiler**

Equipment for Base Machine

Hitch: Lift-type, Category I, Lift-type, Category I, iMatch Compatible
Working Depth:
Up to 24 In. (609.6 mm)
Transport Length:
16 In. (406.4 mm)
Transport Width:
32.5 In. (825.5 mm)
Transport Height:
49 In. (1,244.6 mm) Tractor Engine HP Range: 25 - 45 HP Point: Reversible, Rectangular Sloped Point, 2.5625 In. (65.1 mm) x 12 In. (304.8 mm)

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3451XF		PS1001 Integral Subsoiler Order in multiples of two.	353.00
		OPERATOR'S MANUAL AND DECALS	
904M		French OM & Decal Kit (PS10)  ATTACHMENTS FOR FIELD CONVERSION	15.00
		Miscellaneous	
	5TITE511154	French Kit - Includes Operator's Manual, Parts Catalog and Safety Decals <i>PS1001</i>	15.40

PS1001 Integral Subsoiler Continued
THIS PAGE INTENTIONALLY LEFT BLANK

#### Landscaping

#### DT1136 - 3 pt. Standard Duty Trencher

Equipment for Base Machine


Hitch: 3-Point Category I and iMatch
Working Depth at 65 Degree Digging angle: 36 in. (914.4 mm)
Chain Width: 6 in. (152.4 mm)
Working Weight: 650 lbs. (294.8 kg)
Tractor PTO HP:
15 HP (11.2 kW) Minimum
30 HP (22.3 kW) Maximum
Recommended Trenching Angle: 65 Degrees
Headshaft Height: 8.5 in. (215.9 mm)
Shipping Weight: 730 lbs. (331.1 kg)
Overall Length: 79 in. (2,006.6 mm)
Overall Width: 38 in. (965.2 mm)

Overall Height: 29 in. (736.6 mm)
Discharge Auger: 14 in. (355.6 mm)
Spoil Discharge Reach: 21 in. (533.4 mm)
540 RPM Rear PTO
Slip Clutch Overload Protection
Parking Stand: Standard
Rear Hydraulics Required

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1561XF		BASE MACHINE  DT1136 - 3 pt. Standard Duty Trencher Includes 36 in. boom, crummer, and chain.	8,961.00

Attachment Information is not available in MOCI for the base code 1561XF

Landscaping

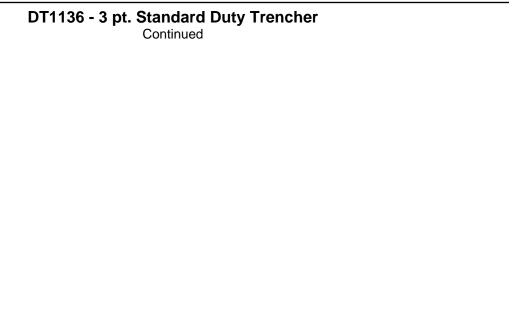

THIS PAGE INTENTIONALLY LEFT BLANK

#### Landscaping

## WC1103 Wood Chipper, 3-Point, PTO Drive, Gravity Feed 3 In. Capacity

**Equipment for Base Machine** 

Using a Belt Drive System
PTO Speed Increased from
540 to 1380-1920 RPM's at Rotor
(Depending on Model)
High Speed Design Requires Less Horsepower
than Direct Drive Models
Double Sided A8 Tool Steel Knives
Adjustable Hardened Anvil

SMV is Standard Equipment 1 Year Parts and Labor Warranty

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1501XF		WC1103 Wood Chipper, 3-Point, PTO Drive, Gravity Feed 3 In. Capacity	4,081.00
904P		OPERATOR'S MANUAL AND DECALS French Operators Manual and Decal Kit	83.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5PQ903177	Miscellaneous French Operators Manual & Decal Kit WC1103 Wood Chipper Destination of Quebec only. Includes French safety decals and manual.	85.80

WC1103 Wood Chipper,	3-Point, PTO Drive,	<b>Gravity Feed 3 In.</b>	Capacity
	Continued		

ΤI	ΗІ	S	PA	GE	INT	ΈN	JTI(	ANC	LLY I	LEFT	BLA	١N٨	Κ

#### Landscaping

### WC1105 Wood Chipper, 3-Point, PTO Drive, Gravity Feed 5 In. Capacity

**Equipment for Base Machine** 

Using a Belt Drive System
PTO Speed Increased from
540 to 1380-1920 RPM's at Rotor
(Depending on Model)
High Speed Design Requires Less Horsepower
than Direct Drive Models
Double Sided A8 Tool Steel Knives
Adjustable Hardened Anvil

SMV is Standard Equipment 1 Year Parts and Labor Warranty

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	
1502XF		BASE MACHINE  WC1105 Wood Chipper, 3-Point, PTO Drive, Gravity Feed 5 In. Capacity	5,699.00
		OPERATORIS MANUAL AND DECALS	
22.45		OPERATOR'S MANUAL AND DECALS	
904P		French Operators Manual and Decal Kit	96.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5PQ903178	Miscellaneous French Operators Manual & Decal Kit WC1105 Wood Chipper Destination of Quebec only. Includes French safety decals and manual.	100.11

_

#### Landscaping

## WC1205 Wood Chipper, 3-Point, PTO Drive, Hydraulic Feed 5 In. Capacity Equipment for Base Machine

Using a Belt Drive System
PTO Speed Increased from
540 to 1380-1920 RPM's at Rotor
(Depending on Model)
Hydraulic Feed
High Speed Design Requires Less Horsepower
than Direct Drive Models
Double Sided A8 Tool Steel Knives
Adjustable Hardened Anvil

SMV is Standard Equipment 1 Year Parts and Labor Warranty

Code	Attachment Identifier	Description	List Price Suggested USD (\$)
		Select One Code From Each Required Category	]
		BASE MACHINE	
1511XF		WC1205 Wood Chipper, 3-Point, PTO Drive, Hydraulic Feed 5 In. Capacity Requires continuous flow from the tractor.	9,244.00
		HYDRAULICS	
8000		Self-Contained Hydraulics	1,178.00
		FEEDING	
8010		Auto Feed (Speed Control)	1,443.00
		OPERATOR'S MANUAL AND DECALS	
904P		French Operators Manual and Decal Kit	119.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5PQ903179	Miscellaneous French Operators Manual & Decal Kit WC1205 Wood Chipper Destination of Quebec only. Includes French safety decals and manual.	123.20

WC1205 Wood Chipper, 3-Point	, PTO Drive,	Hydraulic	Feed 5 In.	Capacity
	Continued			

ΤI	ΗІ	S	PA	GE	INT	ΈN	JTI(	ANC	LLY I	LEFT	BLA	١N٨	Κ

#### Landscaping

### WC1208 Wood Chipper, Pull Type, PTO Drive, Hydraulic Feed 8 In. Capacity

Equipment for Base Machine

Using a Belt Drive System
PTO Speed Increased from
540 to 2050 RPM's at Rotor
(Depending on Model)
Hydraulic Feed
High Speed Design Requires Less Horsepower
than Direct Drive Models
Drum-Style Rotor
Double Sided A8 Tool Steel Knives

Adjustable Hardened Anvil SMV is Standard Equipment 1 Year Parts and Labor Warranty

Code	Attachment Identifier	Description	List Price Suggested USD (\$)			
	Select One Code From Each Required Category					
		BASE MACHINE				
1513XF		WC1208 Wood Chipper, Pull Type, PTO Drive, Hydraulic Feed 8 In. Capacity Requires continuous flow from the tractor.  Product not available for Quebec	18,799.00			
		HYDRAULICS				
8000		Self-Contained Hydraulics	1,549.00			
		FEEDING				
8010		Auto Feed (Speed Control)	1,571.00			
		OPERATOR'S MANUAL AND DECALS				
904P		French Operators Manual and Decal Kit	119.00			
		ATTACHMENTS FOR FIELD CONVERSION				
	5PQ903185	Miscellaneous French Operators Manual & Decal Kit WC1208 Wood Chipper Destination of Quebec only. Includes French safety decals and manual. Destination of Quebec only. Includes French safety decals and manual.	123.20			

WC1208 Wood Chipper, Pull Type, PTO Drive, Hydraulic Feed 8 In. Capacity
Continued

ТΗ	IS.	PA	GF	INTF	NTIC	ONALLY	' I FFT	BLANK
		1 / \	$\smile$			/		