

CATERPILLAR MACHINE PRICE LIST

140M3 LR

140M3 MOTOR GRADER
LITTLE ROCK, AR, USA (SAP)

Ship Weight
lbs

LIST PRICE
AT DEALER

Standard Equipment:

POWERTRAIN

Air cleaner, dual stage dry type radial seal with service indicator and automatic dust ejector
Air-to-air after cooler (ATAAC)
Belt, serpentine, automatic tensioner
Brakes, oil disc, four-wheel, hydraulic
Demand fan, hydraulic
Differential, lock/unlock, automatic
Drain, engine oil, ecology
Electronic over-speed protection
Parking brake, multi-disc, sealed and oil cooled.
Sediment drain, fuel tank.
Tandem drive
Transmission, 8 speed forward and 6 speed reverse, power shift, direct drive
VHP Plus (Variable Horse Power Plus)

ELECTRICAL

Alarm, back-up
Alternator, 150 ampere, sealed
Batteries, maintenance free, heavy duty, 1125 CCA
Breaker panel, ground accessible
Electrical hydraulic valves
Electrical system, 24 volt
Grade Control Ready (Cab harness, software, electrical hydraulic valves, bosses and brackets)
Lights, reversing
Lights, roading, roof-mounted
Lights, stop and tail, LED
Starter, electric

OPERATOR ENVIRONMENT

Air Conditioning with heater
Articulation, automatic return to center
Centershift pin indicator
Display, digital speed and gear
Doors, left and right side with wiper
Gauge, machine level
Gauges (analog) inside the cab (includes fuel, articulation, engine coolant temp, engine RPM, and hydraulic oil temp, DEF/AdBlue)
Joystick, adjustable armrests
Joystick gear selection, hydraulic power steering hydraulic controls (right/left, blade lift w/ float position, blade sideshift and tip, circle drive, centershift, front wheel lean and articulation and steering)
Lights, night time cab

Messenger operator information system
Meter, hour, digital
Mirror, inside rearview, wide angle
Power port, 12V
Radio ready, entertainment
ROPS cab, sound suppressed - 69dB(A) - ISO 6394
Seat, cloth-covered, comfort suspension
Storage area for cooler/lunchbox
Throttle control, electronic
Windows laminated glass:
-Fixed front with intermittent wiper
-Side and rear (3)
Windows tempered:
-Left and right side wipers
-Rear with intermittent wiper
Cab storage

SAFETY AND SECURITY

Clutch, circle drive slip
Doors, 2 engine compartment, (two left hand, two right hand) locking
Doors, 2 service, left and right locking
Ground level engine shutdown
Hammer (emergency exit)
Horn, electric
Lockout, hydraulic implement (for roading and servicing)
Seat belt, retractable 76.2 (3")
Secondary steering
Tandem walkway/guards

TIRES, RIMS, AND WHEELS

A partial allowance for tires on 254mm x 609.6mm (10" x 24") multi-piece rims is included in the base machine price and weight.

FLUIDS

Antifreeze
Extended life coolant -35C/-30F

OTHER STANDARD EQUIPMENT

Accumulators -brake -dual certified
Drawbar, 6 shoe w/replaceable wear strips
Fluid check, ground level
Fuel tank, 398 liters (105 gallon)
Ground level fueling
DEF/AdBlue Tank, 21 liters (5.5 gallon)
Hydraulic lines for base functions
Pump, hydraulic, high capacity (98cc / 15 cu in)
Radiator, cleanout access (both sides with swing doors)
SOS ports - engine -hydraulic

CATERPILLAR MACHINE PRICE LIST

140M3 LR

140M3 MOTOR GRADER
LITTLE ROCK, AR, USA (SAP)

Ship Weight
lbs

LIST PRICE
AT DEALER

OTHER STANDARD EQUIPMENT (CONT.)

-transmission -coolant -fuel
Tandem walkway/guards
Tool box
Debris guard

CATERPILLAR MACHINE PRICE LIST

140M3 LR

140M3 MOTOR GRADER
LITTLE ROCK, AR, USA (SAP)

Ship Weight
lbs

LIST PRICE
AT DEALER

**Lane 2 is reserved for the Base Order Management Program.
Please use Lane 2 when placing orders that are part of the Base Order
Management Program.**

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| | | |
|--|--------------------|-------------------------|
| 140M3 MOTOR GRADER LITTLE ROCK, AR, USA (SAP) | Ship Weight lbs | LIST PRICE AT DEALER |
|--|--------------------|-------------------------|

| | | |
|-----------------|--|------------------|
| 384-8605 | 140M3 MOTOR GRADER 37,911 LANE 2 - AVAILABLE FROM NORTH LITTLE ROCK FACTORY LANE 3 - AVAILABLE FROM NORTH LITTLE ROCK FACTORY | \$383,840 |
| 0P-2971 | 140M3 MISC MATERIAL NLR 0 AVAILABLE FROM NORTH LITTLE ROCK FACTORY | NC |

Only reference numbers that have the text
 "ALSO AVAILABLE ON A MISCELLANEOUS ORDER" can be used on a MISC order.

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

LANE SELECTION

| | | | |
|---------|--|---|-----------|
| 0P-9002 | LANE 2 ORDER | 0 | NC |
| | Only for dealers enrolled in the Base Orders Management (BOM) program. | | |
| 0P-9003 | LANE 3 ORDER | 0 | NC |

REGIONAL PACKAGES

REGIONAL PACKAGES

| | | | |
|---|--|---|-----------|
| L | 385-9294 GLOBAL ARRANGEMENT | 0 | NC |
| | Provides standard brake accumulators. For use in temperatures above -18C | | |
| | CANNOT BE USED WITH: WEATHER, COLD PLUS | | |
| L | 385-9297 GLOBAL ARRANGEMENT,LOW AMBIENT | 0 | NC |
| | Provides brake accumulators for low ambient temperatures below -18C | | |
| | CANNOT BE USED WITH: EU dealers | | |
| | CANNOT BE USED WITH: WEATHER, STANDARD | | |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

PERFORMANCE PACKAGES

MOLDBOARDS

| | | | | |
|---|----------|--|--|---------|
| L | 349-3046 | MOLDBOARD, 12' 0 FOR USE IN LANE 3 ONLY INCLUDES: - Moldboard 12' x 24" x 7/8" (3658mm x 610mm x 22mm) - Curved Cutting Edge, 6" X 5/8" (152mm x 16mm) - End Bits, Standard, Without Overlay | | NC |
| L | 349-3047 | MOLDBOARD, 14' BASIC 347 INCLUDES: - Moldboard 14' x 24" x 7/8" (4267mm x 610mm x 22mm) - Curved Cutting Edge, 8" x 3/4" (203mm x 19mm) - End Bits, Standard, Without Overlay | | \$1,140 |
| L | 349-3048 | MOLDBOARD, 14' PLUS 650 INCLUDES: - Moldboard 14' x 27" x 1" (4267mm x 686mm x 25mm) - Curved Cutting Edge, 8" x 3/4" (203mm x 19mm) - End Bits, Standard, With Overlay | | \$2,710 |

WORK TOOLS

| | | | | |
|---|----------|--|--|-------------------------|
| L | 393-4882 | NO HITCH 0 | | NC |
| L | 337-7510 | HITCH, TOWING 0 | | \$540 |
| L | 324-0889 | RIPPER/SCARIFIER 2,120 2,150 | | \$20,380 \$20,540 NI |

****NOTE****

NOT INSTALLED option is only for use with Miscellaneous orders using OP-2971 140M3 MISC MATERIAL
Hydraulic, rear mounted ripper with three straight ripper shanks. Can accommodate two additional ripper shanks and nine scarifier teeth which must be ordered separately.
REQUIRES: A hydraulics control part number that has a ripper function.
INCLUDES: Ripper Mounting

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

PERFORMANCE PACKAGES (CONT.)

WEATHER PACKAGES

| | | | | |
|---|----------|---|--|---------|
| L | 353-3316 | WEATHER, STANDARD 0 Recommended for year around use when typical ambient temperature range is 0 degrees C (32 degrees F) to 43 degrees C (110 degrees F) and operating at altitude below 1220 m (4000 feet). INCLUDES: - Batteries, Heavy Duty - 1125 CCA - Oil, Hydraulic, 10W FOR USE WITH: GLOBAL ARRANGEMENT FOR USE WITH: EUROPEAN ARRANGEMENT FOR USE WITH: EUROPEAN AR. W/ ROADING (TUV) CANNOT BE USED WITH: GLOBAL ARRANGEMENT,LOW AMBIENT | | NC |
| L | 394-4521 | COLD WEATHER PACKAGE 0 Recommended for year around use when typical ambient temperature range is -18 degrees C (0 degrees F) to 43 degrees C (110 degrees F) and operating at altitude below 1220 m (4000 feet). INCLUDES: - Starting Aid, Ether - Batteries, Extreme Duty -1400 CCA - Oil, Hydraulic, 10W FOR USE WITH: GLOBAL ARRANGEMENT FOR USE WITH: GLOBAL ARRANGEMENT,LOW AMBIENT FOR USE WITH: CANADIAN ARRANGEMENT FOR USE WITH: EUROPEAN ARRANGEMENT FOR USE WITH: EUROPEAN AR. W/ ROADING (TUV) | | \$760 |
| L | 394-4522 | COLD WEATHER PLUS PACKAGE 38 Recommended for year around use when typical ambient temperature range is -40 degrees C (-40 degrees F) to 40 degrees C (104 degrees) or operating at altitude above 1220 m (4000 feet). INCLUDES: - Starting Aid, Ether - Cold Start; Transmission oil and fan brake bypass - Batteries, Extreme Duty -1400 CCA - Oil, Hydraulic, Cold, 0W REQUIRES: HEATER, ENGINE COOLANT, 120V or HEATER, ENGINE COOLANT, 240V REQUIRED BY: SNOW ARRANGEMENT FOR USE WITH: GLOBAL ARRANGEMENT,LOW AMBIENT FOR USE WITH: CANADIAN ARRANGEMENT FOR USE WITH: EUROPEAN ARRANGEMENT FOR USE WITH: EUROPEAN AR. W/ ROADING (TUV) CANNOT BE USED WITH: GLOBAL ARRANGEMENT | | \$3,005 |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

PERFORMANCE PACKAGES (CONT.)

ACCUMULATORS

| | | | | |
|---|----------|--|--|---------|
| L | 305-2927 | LINES, STANDARD W/O ACCUMULATOR 0 Provides hydraulic lines for base functions | | NC |
| L | 358-9338 | ACCUMULATORS, BLADE LIFT 170 Provides hydraulic lines for base functions and accumulators for the blade lift. Allows approximately 1-3" of vertical blade travel to reduce impact loads. Nitrogen/oil accumulators activated by electric switch. CANNOT BE USED WITH: Canadian Dealers. | | \$4,665 |

PRECLEANER

| | | | | |
|---|----------|--|--|-------|
| L | 380-6774 | PRECLEANER, NON SY-KLONE 0 Includes dust ejector for medium to heavy dust environments. | | NC |
| L | 380-6775 | PRECLEANER, SY-KLONE 5 Recommended for environments with large debris (leaves, chips, large grass, etc.) | | \$750 |

POWERTRAIN

ENGINE

| | | | | |
|---|----------|--|--|----|
| L | 567-4688 | ENGINE, TIER IV 0 EPA Tier 4 Final certified engine with aftertreatment Caterpillar C9 ACERT turbo charged diesel engine with automatic engine derate and idle control. | | NC |
|---|----------|--|--|----|

OIL CHANGE

| | | | | |
|---|----------|---|--|-------|
| L | 324-5328 | DRAIN, GRAVITY, ENGINE OIL 0 Standard engine oil drain | | NC |
| L | 501-1163 | DRAIN, HIGH SPEED, ENGINE OIL 0 High speed engine oil drain. Requires pump at service location to be attached to coupling receiver for high speed flow. HSO drain can also manual/gravity drain. | | \$286 |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

HYDRAULICS

NOTE: Optional Control Locations


Caterpillar offers many attachment hydraulic controls to operate work tools. Depending on which hydraulic part number is selected, the operating electro-hydraulic switches may include the auxiliary pod, mini-joystick located on the auxiliary pod, and/or the ripper control pod.

NOTE: Auxiliary controls that can have float

Auxiliary Pod Controls

INDEX = Index Finger (front lift)(float capability)
MID = Middle Finger (dozer angle 1)
RING = Ring Finger (dozer angle 2)
LITTLE= Little Finger (float capability)

NOTE: Mini-Joystick

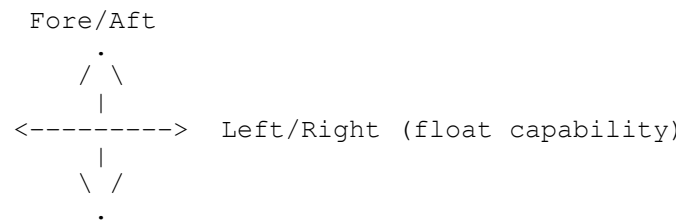

NOTE: Ripper Control Pod

RH1 = Front Lift (float capability)
RH2 = Ripper-Scarifier Control
RHD = Ripper Handle Dual Switch (RH1 & RH2)

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

HYDRAULICS (CONT.)

NOTE: Common Functions

COMMON FUNCTIONS:

Base = 8 functions: right and left blade lift, circle turn, drawbar center shift, blade side shift, blade tip, front wheel lean, frame articulation.

- FL = Front Lift (moves front work tools up/down)
- DA1 = Dozer Angle 1 (angles front blade left OR right)
- DA2 = Dozer Angle 2 (angles front blade left AND right)
- RIP = Rear Mounted Ripper (moves ripper up/down)
- MMS = Mid-Mounted Scarifier
- WM = Wing Mast
- WT = Wing Tilt
- Float = Built-in feature of valve section that opens both the work ports to tank. The external forces (weight of the implement) allows free movement of the implement.
- Flow Rate=Provides maximum rate of fluid flow from the specific work port. B/A represents the maximum flow rate in Port B/Port A* in LPM (liters per minute).

*NOTE: Each valve section has two work ports (Port A and Port B).
 Port A: Used to either raise implement or move implement to the right or for clockwise rotation of the implement.
 Port B: Used to either lower implement or move implement to the left or for counter-clockwise rotation of the implement.

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

HYDRAULICS (CONT.)

HYDRAULIC VALVE LOCATIONS

 This illustration shows the factory installed switch location for each function by hydraulic part number.

| Part Number | MINI-JOYSTICK | | | AUXILIARY POD | | | | RIPPER POD | |
|-------------|---------------|------------------|------------------|---------------------|------|--------|---------|---------------------|--|
| | Front Aft | Left/Right Float | Index with Float | Mid | Ring | Little | RHD RH1 | RHD RH2 | |
| 242-5056 | | | | | | | | | |
| 385-8094 | | | | | | | | RIPPER | |
| Float: | | | | | | | | N | |
| Flow rate: | | | | | | | | 49/49 | |
| 354-4113 | | | | | | | | MID-MOUNT SCARIFIER | |
| Float: | | | | | | | | Y | |
| Flow Rate: | | | | | | | | 25/36 | |
| 309-9848 | | | | | | | | FR.LIFT | |
| Float: | | | | | | | | Y | |
| Flow Rate: | | | | | | | | 46/60 | |
| 385-8095 | | | | | | | | FR.LIFT RIPPER | |
| Float: | | | | | | | | Y N | |
| Flow rate: | | | | | | | | 46/60 49/49 | |
| 395-2008 | MAST | TILT | FR.LIFT | | | | | | |
| Float: | N | N | Y | | | | | | |
| Flow rate: | 72/72 | 41/30 | 46/60 | | | | | | |
| 385-8096 | | | FR.LIFT DA1 | | | | | RIPPER | |
| Float: | | | Y N | | | | | N | |
| Flow rate: | | | 46/60 72/72 | | | | | 49/49 | |
| 385-8099 | MAST | TILT | FR.LIFT | | | | | RIPPER | |
| Float: | N | Y | Y | | | | | N | |
| Flow rate: | 72/72 | 74/86 | 46/60 | | | | | 49/49 | |
| 385-8100 | MAST | TILT | FR.LIFT | | | | | RIPPER | |
| Float: | N | N | Y | | | | | N | |
| Flow rate: | 72/72 | 41/30 | 46/60 | | | | | 49/49 | |
| 395-2009 | MAST | TILT | FR.LIFT DA1 | MID-MOUNT SCARIFIER | | | | | |
| Float: | N | N | Y N | N | | | | | |
| Flow rate: | 72/72 | 41/30 | 46/60 72/72 | 25/36 | | | | | |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

HYDRAULICS (CONT.)

HYDRAULIC VALVE LOCATIONS LANE 3 ONLY

| Part Number | MINI-JOYSTICK | | AUXILIARY POD | | | | RIPPER POD | |
|-------------|---------------|------------------|------------------|-------|-------|--------|------------|--------|
| | Front Aft | Left/Right Float | Index with Float | Mid | Ring | Little | RH1 | RH2 |
| 385-8097 | | | FR. LIFT | | | | | RIPPER |
| Float: | | | Y | | | | | N |
| Flow rate: | | | 46/60 | | | | | 49/49 |
| 385-8101 | MAST | TILT | FR. LIFT | DA1 | | | | RIPPER |
| Float: | N | N | Y | N | | | | N |
| Flow rate: | 72/72 | 41/30 | 46/60 | 72/72 | | | | 49/49 |
| 385-8103 | MAST | TILT | FR. LIFT | DA1 | DA2 | | | RIPPER |
| Float: | N | N | Y | N | N | | | N |
| Flow rate: | 72/72 | 41/30 | 46/60 | 72/72 | 72/72 | | | 49/49 |
| 481-8610 | MAST | TILT | FR. LIFT | DA1 | DA2 | | | RIPPER |
| Float: | N | Y | Y | N | N | | | N |
| Flow rate: | 72/72 | 74/86 | 46/60 | 72/72 | 72/72 | | | 49/49 |

HYDRAULIC VALVE PART NUMBERS

| | | | | |
|---|----------|--|----|---------|
| L | 242-5056 | HYDRAULICS, BASE | 0 | NC |
| | | Base hydraulic system includes machine articulation, wheel lean, left and right blade lift with independent float, drawbar centershift, circle drive, blade sideshift and tip. | | |
| L | 385-8094 | BASE + 1 (RIP) | 21 | \$2,300 |
| | | Ripper function. Includes the Ripper Lines. ONLY FOR USE WITH: RIPPER-SCARIFIER, REAR | | |
| L | 354-4113 | BASE + 1 (MMS) | 21 | \$2,300 |
| | | FOR USE IN LANE 3 ONLY Mid-Mount Scarifier function. Includes the Mid-Mount Scarifier Lines. ONLY FOR USE WITH: MID MOUNT SCARIFIER PACKAGE | | |
| L | 309-9848 | BASE + 1 (FL) | 18 | \$1,890 |
| | | FOR USE IN LANE 3 ONLY Front Lift function. Includes the Front Lift Lines. ONLY FOR USE WITH: LIFT GROUP, MANUAL, FRONT | | |
| L | 385-8095 | BASE + 2 (FL,RIP) | 37 | \$4,085 |
| | | Ripper and Front Lift functions. Includes the Front Lift Lines and Ripper Lines. ONLY FOR USE WITH: LIFT GROUP, MANUAL, FRONT RIPPER-SCARIFIER, REAR | | |
| L | 395-2008 | BASE + 3 (WM,WT-NOFLOAT,FL) | 60 | \$6,540 |
| | | FOR USE IN LANE 3 ONLY Front Lift, Snow Wing Mast, and Snow Wing Tilt ONLY FOR USE WITH: SNOW ARRANGEMENT LIFT GROUP, MANUAL, FRONT | | |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

HYDRAULICS (CONT.)

HYDRAULIC VALVE PART NUMBERS (Cont.)

| | | | | |
|---|----------|--|--|----------|
| L | 385-8096 | BASE + 3 (FL,DA1,RIP) 67 FOR USE IN LANE 3 ONLY Ripper, Front Lift and Angle functions. Includes the Front Lift Lines FOR USE IN LANE 3 ONLY Dozer Angle 1 Lines, and Ripper Lines. ONLY FOR USE WITH: LIFT GROUP, MANUAL, FRONT RIPPER-SCARIFIER, REAR | | \$7,460 |
| L | 385-8099 | BASE + 4 (WM,WT-FLOAT,FL,RIP) 85 Ripper, Front Lift, Snow Wing Mast and Snow Wing Tilt (74/86 with float) functions. Includes the Front Lift Lines and Ripper Lines. ONLY FOR USE WITH: SNOW ARRANGEMENT LIFT GROUP, MANUAL, FRONT RIPPER-SCARIFIER, REAR | | \$8,960 |
| L | 385-8100 | BASE + 4 (WM,WT,FL,RIP) NOFLT 85 FOR USE IN LANE 3 ONLY Ripper, Front Lift, Snow Wing Mast and Snow Wing Tilt (41/30 - No Float) functions. Includes the Front Lift Lines and Ripper Lines. ONLY FOR USE WITH: SNOW ARRANGEMENT LIFT GROUP, MANUAL, FRONT RIPPER-SCARIFIER, REAR | | \$8,700 |
| L | 395-2009 | BASE + 5 (WM,WT,DA1,FL,MMS) 120 FOR USE IN LANE 3 ONLY Snow Wing Mast, Snow Wing Tilt (41/30 - No Float) functions, Dozer Angle 1, Front LIFT, and Mid-Mount Scarifier Includes the Front Lift Lines, Angle 1 Lines, and Mid-Mount Scarifier Lines. ONLY FOR USE WITH: SNOW ARRANGEMENT LIFT GROUP, MANUAL, FRONT MID MOUNT SCARIFIER PACKAGE | | \$10,790 |

HYDRAULIC VALVE PART NUMBERS LANE 3 ONLY

| | | | | |
|---|----------|---|--|----------|
| L | 385-8097 | BASE + 3 (RIP, MMS, FL) 67 FOR USE WITH: Lane 3 only. Front Lift, Ripper and Mid-Mount Scarifier functions. Includes the Front Lift Lines, Ripper Lines and Mid-Mount Scarifier Lines. ONLY FOR USE WITH: LIFT GROUP, MANUAL, FRONT RIPPER-SCARIFIER, REAR MOUNT, MID-MOUNT SCARIFIER | | \$7,460 |
| L | 385-8101 | BASE + 5 (WM,WT,DA1,FL,RIP) 120 FOR USE WITH: Lane 3 only. Snow Wing Mast, Snow Wing Tilt (41/30 - No Float) functions, Dozer Angle 1, Front LIFT, and Ripper. Includes the Front Lift Lines, Angle 1 Lines, and Ripper Lines. ONLY FOR USE WITH: SNOW ARRANGEMENT MOUNT, SNOW WING, FRAME READY LIFT GROUP, MANUAL, FRONT RIPPER-SCARIFIER, REAR | | \$10,790 |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

HYDRAULICS (CONT.)

HYDRAULIC VALVE PART NUMBERS (Cont.)

| | | | | |
|---|----------|--|-----|----------|
| L | 385-8103 | BASE + 6(WM,WT,DA1,DA2,FL,RIP)130 FOR USE WITH: Lane 3 only. Ripper, Dozer Angle 1, Dozer Angle 2, Front Lift, Snow Wing Mast and Snow Wing Tilt (41/30 - No Float) functions. Includes the Front Lift Lines, Dozer Angle 2 Lines and Ripper Lines. ONLY FOR USE WITH: SNOW ARRANGEMENT MOUNT, SNOW WING, FRAME READY LIFT GROUP, MANUAL, FRONT RIPPER-SCARIFIER, REAR | 130 | \$13,350 |
| L | 481-8610 | BASE + 6(WM,WT + F,DA1,DA2,FL,RIP) 130 FOR USE WITH: Lane 3 only. Ripper, Dozer Angle 1, Dozer Angle 2, Front Lift, Snow Wing Mast and Snow Wing Tilt (72/72 + Float) functions. Includes the Front Lift Lines, Dozer Angle 2 Lines and Ripper Lines. ONLY FOR USE WITH: SNOW ARRANGEMENT MOUNT, SNOW WING, FRAME READY LIFT GROUP, MANUAL, FRONT RIPPER-SCARIFIER, REAR | 130 | \$13,620 |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

STARTERS, BATTERIES, & ALTERNATORS

STARTER ARRANGEMENT

| | | | | |
|---|----------|--|--|-------|
| L | 394-3945 | STARTER, ELECTRIC, HEAVY DUTY 0 Provides a 1000 Amp. starter | | NC |
| L | 395-3547 | STARTER, ELEC, EXTREME DUTY 21 Recommended for Cold weather applications Provides a 1000 Amp. starter | | \$408 |

ELECTRICAL

BRAKE LIGHTS

| | | | | |
|---|----------|--|--|---------|
| L | 331-6793 | LIGHTS, BRAKE AND BACK-UP 0 FOR USE IN LANE 3 ONLY Provides stationary rear brake lights along with the back-up lights. Does not include front headlights or turn signals CANNOT BE USED WITH: 526-2563 EUROPEAN ARRANGEMENT 394-3871 EUROPEAN AR. W/ROADING (TUV) 308-9370 LIGHTS, FRONT HEADLIGHTS, LOW 308-9371 LIGHTS, FRONT HEADLIGHTS, HIGH 396-1966 SNOW ARRANGEMENT | | NC |
| L | 536-9969 | LIGHTS, ARM, FOLD DOWN 0 Provides stationary rear brake lights along with the back-up lights, dimmer switch for road lighting, drop-down stop, tail, and rear turn signals and back-up lights. REQUIRES: 308-9370 LIGHTS, FRONT HEADLIGHTS, LOW 308-9371 LIGHTS, FRONT HEADLIGHTS, HIGH INCLUDED IN: 396-1966 SNOW ARRANGEMENT | | \$1,875 |

ROADING LIGHTS

| | | | | |
|---|----------|--|--|---------|
| L | 421-7810 | LIGHTS, ROADING, HALOGEN 0 Provides six halogen cab roof mounted roading lights. | | NC |
| L | 550-6608 | LIGHTS, ROADING, LED 0 Provides six LED cab roof mounted roading lights. | | \$1,245 |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

OPERATOR ENVIRONMENT

CAB EXTERIOR

| | | | | |
|---|----------|--|--|---------|
| L | 385-9553 | CAB, BASE (STANDARD GLASS) 0 FOR USE IN LANE 3 ONLY INCLUDES: - 150 amp alternator - Standard Glass CANNOT BE USED WITH: SNOW ARRANGEMENT CANNOT BE USED WITH: EUROPEAN ARRANGEMENT CANNOT BE USED WITH: EUROPEAN AR. W/ ROADING (TUV) | | NC |
| L | 385-9554 | CAB, PLUS (STANDARD GLASS) 35 INCLUDES: - 150 amp alternator - Wiper/washer, rear - Standard Glass | | \$1,105 |
| L | 385-9555 | CAB, PLUS (ANTI-ICING GLASS) 35 FOR USE IN LANE 3 ONLY INCLUDES: - 270 amp alternator - Wiper/washer, rear - Front glass and RH door glass are heated. | | \$6,630 |

CAB INTERIOR

| | | | | |
|---|----------|---|--|---------|
| L | 397-7456 | CAB, BASE (INTERIOR) 0 FOR USE IN LANE 3 ONLY INCLUDES: - Seat, mechanical suspension, cloth - Shade, Sun CANNOT BE USED WITH: SNOW ARRANGEMENT CANNOT BE USED WITH: EUROPEAN ARRANGEMENT CANNOT BE USED WITH: EUROPEAN AR. W/ ROADING (TUV) | | NC |
| L | 397-7457 | CAB, PLUS (INTERIOR) 45 INCLUDES: - Seat, Air Suspension, Cloth, Heated - Radio, 12V, AM/FM, Weatherband, Bluetooth, USB, Aux Input Available to countries with bluetooth certification. Please contact your Cat marketing representative if you have questions. - Fan, defroster, rear window - Converter, Communication (CB) - Shade, Sun | | \$3,010 |
| L | 397-7458 | CAB, PREMIUM (INTERIOR) 80 FOR USE IN LANE 3 ONLY - Seat, air suspension, cloth; Heated, Ventilated - Radio, 12V, AM/FM CD/MP3 Bluetooth, Weatherband, USB, Aux Input XM/Sirius Satellite Available to countries with bluetooth certification. Please contact your Cat marketing representative if you have questions. - Fan, defroster, rear window - Converter, Communication (CB) - Shade, Sun *Recommended for Snow Removal | | \$4,580 |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

OPERATOR ENVIRONMENT (CONT.)

SEAT BELT

| | | | | |
|---|----------|---|---|-------|
| L | 394-1492 | SEAT BELT | 0 | NC |
| | | Standard 3 inch seat belt | | |
| L | 394-1132 | SEAT BELT W/INDICATOR | 5 | \$193 |
| | | Standard 3 inch seat belt with indicator located on display panel | | |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

TECHNOLOGY PRODUCTS

PRODUCT LINK

Product Link enables the remote transmission of information about the location, operation, and condition of your equipment. Efficiently and effectively monitor the performance of your assets to help keep your jobs on schedule, maintain equipment condition, and reduce the costs of owning and operating your fleet. Availability varies by country - please reference <https://Dealer.cat.com/PL/Certification> for certified countries. Please contact your Caterpillar marketing representative with questions.

| | | | | |
|---|----------|---|--|--------------|
| L | 464-6804 | PRODUCT LINK, SATELLITE PLE631 29 Product Link Elite series PLE631 uses a satellite network to transmit location, utilization and condition information for viewing in Product Link's remote monitoring web interface. For use in areas with poor or no cellular coverage. | | \$432 |
| L | 464-6442 | PRODUCT LINK, CELLULAR PLE641 29 Product Link Elite series PLE641 offers expanded coverage including 3G UMTS and CDMA2000 as well as 2G GSM and CDMA cellular networks to transmit location, utilization and condition information for viewing in Product Link's remote monitoring web interface. Cellular technology provides capabilities for frequent transmission and larger volumes of data. | | NC |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

TECHNOLOGY PRODUCTS (CONT.)

ACCUGRADE

| | | | | |
|---|----------|---|----|---------|
| L | 362-5222 | NO ACCUGRADE. | 0 | NC |
| L | 462-7928 | INSTALLATION, ACCUGRADE READY Allows the Motor Grader to be equipped with either a Cross Slope, Sonic, Laser, GPS, or ATS electronics kit. Provides software, harnesses for sensors, mounting for sensors and blade mast bracket. | 90 | \$4,830 |

NOTE: Highly recommended to select Advanced Joystick Controls. This will Allow for complete configuration and control when using 3 party grade control systems

| | | | | |
|---|----------|--|-----|----------|
| L | 462-7929 | GRADE CONTROL X SLOPE Allows the operator to manually control one end of the blade to match the curb or crown while automatically maintaining the desired slope of the blade. This system is used to maintain the crown of a gravel road or the shoulder of a road. Provides cab switches, software, harnesses for sensors, mounting for sensors and blade mast bracket. Accugrade Ready is included in this option REQUIRES: JOYSTICK CONTROLS, ADVANCED INCLUDED IN: 492-3594 CONTROLS, PERFORMANCE BUNDLE | 165 | \$11,060 |
|---|----------|--|-----|----------|

MOTOR GRADER CONTROLS

| | | | | |
|---|----------|--|---|---------|
| L | 357-9151 | JOYSTICK CONTROLS, BASIC Standard joystick controls. | 6 | NC |
| L | 458-8701 | JOYSTICK CONTROLS, ADVANCED Provides enhanced functionality while using ACCUGRADE READY or GRADE CONTROL X SLOPE INCLUDES: - Advanced Joysticks - Harness - Films REQUIRED BY: GRADE CONTROL X SLOPE. RECOMMENDED FOR USE WITH: ACCUGRADE READY INCLUDED IN: 492-3594 CONTROLS, PERFORMANCE BUNDLE | 8 | \$2,030 |

CONTROL AUTO ARTICULATION

| | | | | |
|---|----------|--|---|---------|
| L | 483-2354 | CONTROL,AUTO ARTICULATION-DEMO 500 machine hour demo. Improves ease of operation, increases maneuverability and maximizes productivity by automatically matching articulation angle to steering angle. Includes 3 position rocker switch enabling 3 modes; off / forward / both forward and reverse. | 0 | NC |
| L | 435-2072 | CONTROL,AUTO ARTICULATION-FULL Improves ease of operation, increases maneuverability and maximizes productivity by automatically matching articulation angle to steering angle. Includes 3 position rocker switch enabling 3 modes; off / forward / both forward and reverse. | 0 | \$1,810 |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|---------------------|----------|---|-----------------|----------------------|
| FUEL SYSTEMS | | | | |
| L | 540-2373 | TANK, FUEL, STANDARD 0 Standard Fuel 105 gallon (398 L) | | NC |
| L | 553-3677 | TANK, FUEL, FAST FILL 0 Fuel tank is ready to accept fast fill 100 gpm nozzle. Tank capacity is 105 gallons (398 L) | | \$1,410 |
| COOLING | | | | |
| COOLING FAN | | | | |
| L | 542-4660 | FAN, STANDARD 0 Provides a hydraulically driven demand fan | | NC |
| L | 542-4661 | FAN, REVERSING 0 Provides a hydraulically driven demand fan that can reverse direction to prevent debris build up on the cooling package and engine enclosure. Includes automatic and manual controls for airflow reversal. Recommended for applications with a high content of airborne debris. | | \$3,105 |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

TIRES, RIMS, AND WHEELS

Tires listed below include a set of six tires.
 **To calculate tire loads with machine attachments, please reference the MG Tire Selection Pocket Guide (media #AEXQ0182), available on the Electronic Sales Library.
 All tire selections should be made with consideration for planned machine attachments (OEM and aftermarket) and their additional weight. Each tire has a maximum load rating that is not to be exceeded. The tire selection should be based on the maximum of all tire position loads on the machine. Assistance for calculating the highest tire load can be found in the Tire Load Worksheet in the back of the Caterpillar Motor Graders Tire Selection Pocket Guide. Failure to abide by the load ratings of the tires without first consulting the local tire supplier representative could result in nullification of the tire warranty.

Due to industry-wide tire availability limitations, tire brand and type cannot be guaranteed. Every effort will be made to satisfy your tire choice, but we reserve the right to change to alternate tires. If the tire brand cannot be supplied, the dealer will be contacted to propose alternative tire options. The dealer will need to respond with an alternative tire selection within 72 hours. If no response is provided by the supplier, the order will default to a comparable tire. As a consequence of a tire change the total machine price will be decreased or increased relative to the price of the new tire selection.

The information provided can be used to make a tire selection based on the particular conditions at the site. When available, the tire manufacturer should be consulted regarding proper tire selection.

APPLICATION SPECIFIC TIRES

| | | | | |
|---|----------|---|--|----------|
| L | 515-5399 | TIRES,14.0R24 SOIL TRACTION MP 0 | | \$5,970 |
| | | Tire group received will be one of the tire groups listed below: - Bridgestone VKT 1* on 10" x 24" multi-piece rims. - Michelin XGLA2 1* on 10" x 24" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** | | |
| L | 515-5400 | TIRES,17.5R25 SOIL TRACTION MP 0 | | \$12,450 |
| | | Tire group received will be one of the tire groups listed below: - Bridgestone VKT 1* on 14" x 25" multi-piece rims. - Michelin XTLA 1* on 14" x 25" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** | | |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

TIRES, RIMS, AND WHEELS (CONT.)

Bridgestone

| | | | | |
|---|----------|--|--|----------|
| L | 252-0714 | TIRES, 14.0R24 BS VKT * G2 1,540 FOR USE IN LANE 3 ONLY Bridgestone VKT 1* on 10" x 24" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR USE IN LANE 3 ONLY FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** | | \$6,970 |
| L | 252-0720 | TIRES, 14.0R24 BS VUT * L2 MP 1,012 Bridgestone VUT 1* on 10" x 24" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** | | \$7,250 |
| L | 252-0775 | TIRES, 17.5R25 BS VKT * D2A MP 1,810 Bridgestone VKT 1* on 14" x 25" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** | | \$13,450 |
| L | 252-0708 | TIRES, 14.0R24 BS VSW * G2 MP 1,481 Bridgestone VSW 1* on 10" x 24" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** | | \$13,320 |
| L | 310-7331 | TIRES, 17.5R25 BS VSW * G2 MP 1,888 Bridgestone VSW 1* on 14" x 25" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** | | \$18,590 |

Michelin

| | | | | |
|---|----------|--|--|----------|
| L | 252-0679 | TIRES, 14.0R24 MX XGLA2 * G2 MP 1,069 Michelin XGLA2 1* on 10" x 24" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (7824 lbs) 3550 kg.** | | \$10,860 |
| L | 252-0701 | TIRES, 14.0R24 MX XSNO+ * G2 MP 1,282 Michelin XSNO 1* on 10" x 24" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (7824 lbs) 3550 kg.** | | \$14,890 |
| L | 252-0777 | TIRES, 17.5R25 MX XSNO+ * G2 MP 1,093 Michelin XSNO+ 1* on 14" x 25" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** | | \$20,490 |
| L | 252-0771 | TIRES, 17.5R25 MX XTLA * L2 MP 1,371 Michelin XTLA 1* on 14" x 25" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** | | \$16,110 |
| L | 254-7904 | TIRES, 14.0R24 MX XGLA2 * G2 SP 709 Michelin XGLA 1* on 9" x 24" single piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (7824 lbs) 3550 kg.** | | \$7,290 |
| L | 254-7971 | TIRES, 17.5R25 MX XTLA * L2 SP 979 Michelin XTLA 1* on 13" x 25" single piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** | | \$11,910 |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

TIRES, RIMS, AND WHEELS (CONT.)

SHIPPING TIRES

| | | | | |
|---|----------|--|-----|---------|
| L | 440-3433 | TIRES, 17.5 SHIPPING, MP 274 FOR USE WITH LANE 3 ONLY Shipping tire for use during shipment of machine only. Solid rubber band mounted on 14" x 25" multi-piece rims. Must be replaced with pneumatic tire before delivering to customer. | 274 | \$2,250 |
| L | 448-5577 | TIRES, 14.0 SHIPPING, MP 90 FOR USE WITH LANE 3 ONLY Shipping tire for use during shipment of machine only. Solid rubber band mounted on 10" x 24" multi-piece rims. Must be replaced with pneumatic tire before delivering to customer. | 90 | \$2,000 |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

GUARDS

Guards

| | | | | |
|---|----------|--|----|---------|
| L | 323-6970 | GUARD GP, HITCH | 25 | NC |
| | | Standard bottom plate just rear of articulation hitch | | |
| L | 368-6239 | ARTICULATION GUARD. | 30 | \$1,260 |
| | | Provides protection for the articulation rods from snow, dirt and Highly recommended for snow removal applications, or below freezing CANNOT BE USED WITH : SOUND SUPPRESSION (BOTTOM) | | |

FLUIDS

ANTIFREEZE

| | | | | |
|---|----------|---|---|-----------|
| L | 469-8157 | COOLANT, 50/50, -35C (-31F) | 0 | NC |
| | | Standard engine coolant | | |
| L | 469-8160 | COOLANT, 60/40, -51C (-60F) | 0 | \$245 NET |
| | | Engine coolant recommended for extreme low temperatures | | |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

DOCUMENTATION

LANGUAGE SELECTION

NOTE: This part number will provide the language for Messenger and Statement of Conformity

| | | | | |
|---|----------|-------------------------|---|----|
| L | 386-1254 | LANGUAGE, ENGLISH | 0 | NC |
|---|----------|-------------------------|---|----|

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | MANDATORY ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|-----------------------|-----------------|----------------------|
|-----|---------|-----------------------|-----------------|----------------------|

DOCUMENTATION (CONT.)

DECAL PACKAGES

**NOTE: This part number will provide the films in ANSI or ISO
The word "WARNING" is on picto decals for ANSI.
Symbols only are on picto decals for ISO.**

| | | | | |
|---|----------|--|--|----|
| L | 442-9940 | DECALS, ENGLISH (U.S.) 0 Provides decals as required by ANSI. | | NC |
|---|----------|--|--|----|

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | OPTIONAL ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|----------------------|-----------------|----------------------|
|-----|---------|----------------------|-----------------|----------------------|

FEATURE PACKAGES

REGIONAL OPTIONAL PACKAGES

| | | | | |
|---|----------|--|-----|----------------|
| L | 396-1966 | SNOW ARRANGEMENT | 355 | \$6,460 |
| | | INCLUDES: - LIGHTS, ARM, FOLD DOWN - MOUNTING, WARNING LIGHT - TRANSMISSION, AUTOSHIFT REQUIRES: MOUNT,SNOW WING,FRAME RDY HAL or LED LIGHTS, WORKING, PLUS, HALOGEN or LED HEADLIGHTS,FRONT, HIGH, (HALOGEN OR LED) HEATER, ENGINE COOLANT, 120V or 240V STARTER, ELEC, EXTREME DUTY or EXTRM DUTY(TUV) WEATHER, COLD PLUS CAB, PLUS (STANDARD GLASS) or (ANTI-ICING GLASS) | | |
| | | NOTE: RECOMMENDED: MIRRORS, OUTSIDE HEATED | | |

WORK TOOL PACKAGES

| | | | | |
|---|----------|---|-------|-----------------|
| L | 358-9341 | MID MOUNT SCARIFIER PACKAGE | 2,076 | \$16,290 |
| | | FOR USE IN LANE 3 ONLY INCLUDES: - Mid-mount Scarifier, V-Type with 11 Teeth - MOUNT, MID-MOUNT SCARIFIER CANNOT BE USED WITH: Any Front Lift Group OR FENDERS, FRONT, NON-AWD | | |

WORK TOOL PACKAGES-SNOW WING MOUNT

| | | | | |
|---|----------|---|-----|----------------|
| L | 390-9182 | MOUNT,SNOW WING,FRAME RDY HAL | 251 | \$2,295 |
| | | FOR USE IN LANE 3 ONLY INCLUDES: - Snow Wing Mount - Light, halogen Snow Wing, Right Hand REQUIRED BY: SNOW ARRANGEMENT | | |
| L | 551-6546 | MOUNT,SNOW WING,FRAME RDY LED | 0 | \$2,710 |
| | | FOR USE IN LANE 3 ONLY INCLUDES: - Snow Wing Mount - Light, LED Snow Wing, Right Hand REQUIRED BY: Snow Arrangement | | |

LIGHTING PACKAGES

| | | | | |
|---|----------|--|----|--------------|
| L | 395-1966 | LIGHTS, WORKING, BASIC,HALOGEN | 19 | \$770 |
| | | FOR USE IN LANE 3 ONLY INCLUDES: - Lights, Work, Heel 3X3 - Lights, Work, Midframe Toe 3X3 - Switch, Work Lighting | | |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | OPTIONAL ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|----------------------|-----------------|----------------------|
|-----|---------|----------------------|-----------------|----------------------|

FEATURE PACKAGES (CONT.)

LIGHTING PACKAGES (Cont.)

| | | | | |
|---|----------|--|--|---------|
| L | 395-1967 | LIGHTS, WORKING, PLUS, HALOGEN 22 INCLUDES: - Lights, halogen, ripper 3X3 - Lights, halogen, work, heel 3X3 - Lights, halogen, work, midframe toe 3X3 - Switch, Work Lighting CANNOT BE USED WITH: LIGHTS, ROADING, LED MOUNT, SNOW WING, FRAME RDY LED REQUIRED BY: SNOW ARRANGEMENT | | \$1,035 |
| L | 552-7285 | LIGHTS, WORKING, PLUS, LED 0 INCLUDES: - Lights, LED, ripper 3X3 - Lights, LED, work, heel 3X3 - Lights, LED, work, midframe toe 3X3 - Switch, work lighting CANNOT BE USED WITH: LIGHTS, ROADING, HALOGEN MOUNT, SNOW WING, FRAME RDY HAL REQUIRED BY: SNOW ARRANGEMENT | | \$2,590 |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | OPTIONAL ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|----------------------|-----------------|----------------------|
|-----|---------|----------------------|-----------------|----------------------|

FEATURE PACKAGES (CONT.)

OTHER OPTIONAL ATTACHMENTS

| | | | | |
|---|----------|---|--|----------|
| L | 338-1132 | LIGHT, LED WARNING STROBE 5 Amber high-speed strobe beacon. REQUIRES: MOUNTING, WARNING LIGHT | | \$605 NI |
| L | 361-3137 | MOUNTING, WARNING LIGHT 10 Provides the bracket for warning beacon light INCLUDED IN: SNOW ARRANGEMENT | | \$725 |
| L | 396-3515 | TRANSMISSION, AUTOSHIFT 5 Improves ease of operation and maximizes productivity by automatically shifting the transmission at optimal shift points. INCLUDED IN: SNOW ARRANGEMENT REQUIRED BY: EUROPEAN ARRANGEMENT EUROPEAN AR. W/ ROADING (TUV) | | \$3,205 |
| L | 380-3070 | LIGHTS, SERVICE, INTERNAL 5 Provides two lights operated by a single manual switch located in the rear enclosure. One light illuminates the engine compartment and the second light illuminates the hydraulic level sight gauge. | | \$193 |

ELECTRICAL

FRONT HEADLIGHTS

| | | | | |
|---|----------|---|--|---------|
| L | 308-9370 | HEADLIGHTS,FRONT, LOW, HALOGEN 0 Provides LOW bar HALOGEN headlights with front turn signals. CANNOT BE USED WITH: 396-1966 SNOW ARRANGEMENT ANY LED LIGHTING OPTION REQUIRED BY: 526-2563 EUROPEAN ARRANGEMENT 394-3871 EUROPEAN AR. W/ROADING (TUV) 536-9969 LIGHTS, ARM, FOLD DOWN | | \$640 |
| L | 553-2588 | HEADLIGHTS, FRONT, LOW, LED 0 Provides LOW bar LED headlights with front turn signals. CANNOT BE USED WITH: SNOW ARRANGEMENT ANY HALOGEN LIGHTING OPTION REQUIRED BY: LIGHTS,ARM, FOLD DOWN 526-2563 EUROPEAN ARRANGEMENT 394-3871 EUROPEAN AR. W/ROADING (TUV) | | \$1,365 |
| L | 308-9371 | HEADLIGHTS,FRONT, HIGH,HALOGEN 0 Provides HIGH bar HALOGEN headlights with front turn signals. CANNOT BE USED WITH: ANY LED LIGHTING OPTION REQUIRED BY: 526-2563 EUROPEAN ARRANGEMENT 394-3871 EUROPEAN AR. W/ROADING (TUV) 536-9969 LIGHTS, ARM, FOLD DOWN 396-1966 SNOW ARRANGEMENT | | \$640 |
| L | 553-2589 | HEADLIGHTS, FRONT, HIGH, LED 0 Provides HIGH bar LED headlights with front turn signals. CANNOT BE USED WITH: ANY HALOGEN LIGHTING OPTION REQUIRED BY: LIGHTS,ARM, FOLD DOWN SNOW ARRANGEMENT 526-2563 EUROPEAN ARRANGEMENT 394-3871 EUROPEAN AR. W/ROADING (TUV) | | \$1,365 |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | OPTIONAL ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|----------------------|-----------------|----------------------|
|-----|---------|----------------------|-----------------|----------------------|

OPERATOR ENVIRONMENT

CAMERA

| | | | | |
|---|----------|--|--|----------------|
| L | 396-3921 | CAMERA, REAR VISION 15 Provides a 115 degree color camera mounted on the rear of the hood that is connected to a 7 inch (178mm) LCD color display mounted in the cab which shows the view behind the machine. CAN NOT BE USED WITH: EUROPEAN AR. W/ ROADING (TUV) NOTE* EUROPEAN AR. W/ ROADING (TUV) includes front and rear facing cameras | | \$2,535 |
|---|----------|--|--|----------------|

MIRRORS

| | | | | |
|---|----------|--|--|--------------|
| L | 233-3295 | MIRRORS, OUTSIDE MOUNTED 32 Provides two convex mirrors for outside mounting on the left and right cab grab irons. NOTE: The mirrors are wrapped in bubble wrap and rotated toward the doors for protection during shipment. | | \$495 |
| L | 344-0984 | MIRRORS, OUTSIDE HEATED 24V 33 Provides mirrors with a 24V heating element to keep mirrors ice free in cold weather operations. NOTE: The mirrors are wrapped in bubble wrap and rotated toward the doors for protection during shipment. | | \$670 |

TECHNOLOGY PRODUCTS

TECHNOLOGY PRODUCTS

| | | | | |
|---|----------|--|--|-----------------|
| L | 393-6335 | SECURITY SYSTEM, MACHINE 10 FOR USE IN LANE 3 ONLY Provides a programmable system to manage access to the machine using special MSS keys. Deters theft, vandalism, and unauthorized use. Programmable features allow the following: * limits operators to selected machines * controls the days and hours equipment may be started * controls access by untrained operators or personnel | | \$720 |
| L | 458-2072 | STABLE BLADE 3 Provides sensor and software to automatically reduce engine speed in various applications to reduce machine bounce and scalloping of surface. | | \$2,470 |
| L | 492-3594 | CONTROLS, PERFORMANCE BUNDLE 176 The Auto Articulation in this bundle is an unrestricted version, not limited to 500 hours. INCLUDES: 435-2072 CONTROL,AUTO ARTICULATION-FULL 458-2072 STABLE BLADE 458-8701 JOYSTICK CONTROLS, ADVANCED 462-7929 GRADE CONTROL X SLOPE | | \$15,560 |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | OPTIONAL ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|---------------|----------|--|-----------------|----------------------|
| GUARDS | | | | |
| L | 367-6905 | GUARD, AXLE HOSE 15 FOR USE IN LANE 3 ONLY Provides additional protection to the front axle cylinders, lines, and fittings. NOTE: NOT recommended for use with tire chains | 15 | \$1,075 |
| L | 366-2459 | GUARD, TRANSMISSION 310 Provides a steel guard to protect the transmission from ground debris. REQUIRED BY: SOUND SUPPRESSION (BOTTOM) INCLUDED IN: EUROPEAN ARRANGEMENT EUROPEAN AR. W/ ROADING (TUV) | 310 | \$3,400 |
| L | 377-1602 | SOUND SUPPRESSION (BOTTOM) 243 FOR USE IN LANE 3 ONLY Provides two metallic side panels on either side of the transmission guard, enclosing the rear of the machine. This option prevents debris from accumulating on top of the transmission guard and also suppresses sound to meet EU sound regulations. REQUIRES: GUARD, TRANSMISSION REQUIRES: GUARD GP, HITCH INCLUDED IN: EUROPEAN ARRANGEMENT INCLUDED IN: EUROPEAN AR. W/ ROADING (TUV) CANNOT BE USED WITH: ARTICULATION GUARD | 243 | \$2,095 |
| L | 546-0262 | SOUND SUPPRESSION, ENGINE ENCL 0 FOR USE IN LANE 3 ONLY Suppression panels in engine enclosure doors. INCLUDED IN: EUROPEAN ARRANGEMENT INCLUDED IN: EUROPEAN AR. W/ ROADING | 0 | \$1,540 |
| L | 498-3458 | FENDERS, FRONT, JOY, TND 0 Non-metallic front fenders aid in reducing the build-up of mud, snow, or debris. Front fenders are compatible with all Non-AWD tire sizes offered by the factory. ** NOT RECOMMENDED FOR USE WITH TIRE CHAINS. CANNOT BE USED WITH: MID MOUNT SCARIFIER PACKAGE -OR- GUARD, AXLE HOSE | 0 | \$4,130 |
| L | 568-3669 | FENDERS, REAR 0 Provides non-metallic rear fenders to aid in reducing the build-up of mud, snow, or debris. Rear fenders are compatible with all MG tire sizes offered by the factory. INCLUDED IN: EUROPEAN AR. W/ ROADING (TUV) ** NOT RECOMMENDED FOR USE WITH TIRE CHAINS. | 0 | \$5,030 |

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | OPTIONAL ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|----------------------|-----------------|----------------------|
|-----|---------|----------------------|-----------------|----------------------|

OTHER ATTACHMENTS

STARTING AIDS

| | | | | |
|---|----------|---|--|--------------|
| L | 249-5516 | HEATER, ENGINE COOLANT, 120V 3 Engine coolant heater for 120 volt external power source. REQUIRED BY: SNOW ARRANGEMENT | | \$245 |
|---|----------|---|--|--------------|

CIRCLE DRIVE INJECTOR GREASE

| | | | | |
|---|----------|--|--|--------------|
| L | 521-3250 | KIT, CIRCLE SAVER 0 Remote Circle Drive Greasing point (Zerk). Located top of drawbar for easy servicing of circle drive gear. Helps the pinion maintain its lubrication caused by lack of grease in this component. | | \$238 |
|---|----------|--|--|--------------|

WORK TOOLS

| | | | | |
|---|----------|---|--|----------------|
| L | 360-5074 | MOUNT, MID-MOUNT SCARIFIER 131 FOR USE IN LANE 3 ONLY Brackets welded to front frame for future installation of midmount scarifier. INCLUDED IN: SCARIFIER, MID-MOUNT V-TYPE NOTE: This is the mounting only and does not include the scarifier. | | \$1,520 |
|---|----------|---|--|----------------|

| | | | | |
|---|----------|--|---|-------------------------------------|
| L | 367-6880 | COUNTERWEIGHT 885 FOR USE IN LANE 3 ONLY **NOTE** NOT INSTALLED option is only for use with Miscellaneous orders using 0P-2971 140M3 MISC MATERIAL Front mounted. Recommended when machine is not equipped with front or rear mounted work tool attachments to provide additional blade performance capability. NOTE: This cannot be used in conjunction with push plate, front lift work tools, or the 'installed' hydraulic front lift. It can be used with a not installed hydraulic front lift NOT RECOMMENDED FOR USE WITH: RIPPER-SCARIFIER, REAR CANNOT BE USED WITH: PUSH PLATE LIFT GROUP, MANUAL, FRONT (Installed) | 0 | \$3,200 \$3,200 NI |
|---|----------|--|---|-------------------------------------|

| | | | | |
|---|----------|---|-------|-------------------------------------|
| L | 367-6842 | PUSH PLATE, COUNTERWEIGHT 2,822 **NOTE** NOT INSTALLED option is only for use with Miscellaneous orders using 0P-2971 140M3 MISC MATERIAL Front mounted. Recommended when machine is equipped with rear ripper/scarifier and other rear mounted attachments. NOTE: This cannot be used in conjunction with counterweight, any front lift work tools, or the 'installed' hydraulic front lift. It can be used with a not installed hydraulic front lift CANNOT BE USED WITH: COUNTERWEIGHT CANNOT BE USED WITH: LIFT GROUP, MANUAL, FRONT (Installed) | 2,822 | \$5,640 \$5,640 NI |
|---|----------|---|-------|-------------------------------------|

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | OPTIONAL ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|----------------------|-----------------|----------------------|
|-----|---------|----------------------|-----------------|----------------------|

WORK TOOLS (CONT.)

| | | | | |
|---|----------|-------------------------------------|----------------|-------------------------|
| L | 312-2204 | LIFT GROUP, MANUAL, FRONT | 1,500 1,500 | \$11,030 \$11,030 NI |
|---|----------|-------------------------------------|----------------|-------------------------|

FOR USE IN LANE 3 ONLY
Front hydraulic lift without any work tool attached.
Note: This Front Lift Group has manual locking pins.

INSTALLED COMPATIBILITY:
REQUIRES: MOUNTING, FRONT LIFT
REQUIRES: Hydraulics control part number that has front lift (FL) function
REQUIRED, to use Front Scarifiers
CANNOT BE USED WITH: PUSH PLATE
CANNOT BE USED WITH: COUNTERWEIGHT
CANNOT BE USED WITH: MID MOUNT SCARIFIER PACKAGE

(The Installed Manual Lift Group can be attached to the machine at the same time as the mounting for the mid-mount scarifier, but not the actual scarifier itself).

NOTE: A Not-Installed Manual Lift Group can be ordered with an INSTALLED Push Plate or Counterweight. The not-installed lift group will be skidded, banded and shipped with the unit.

NOT INSTALLED COMPATIBILITY:
REQUIRES: MOUNTING, FRONT LIFT
REQUIRES: Hydraulics control part number that has front lift (FL) function

| | | | | |
|---|----------|--------------------------------------|----|-------|
| L | 359-3925 | LIFT GROUP, FRONT MOUNTING | 10 | \$442 |
|---|----------|--------------------------------------|----|-------|

Two mounting plates welded to both sides of the front frame for factory or future installation of Front Lift.

REQUIRED BY: LIFT GROUP, MANUAL, FRONT

| | | | | |
|---|----------|-------------------------------------|---|-------|
| L | 387-8664 | LINES, RIPPER, ADDITIONAL | 8 | \$426 |
|---|----------|-------------------------------------|---|-------|

For use with rear mounted auxiliary functions. Provides two hydraulic hoses with one end bundled at the rear of the machine and the other end bundled at the rear valve bank in front of the cab.

REQUIRES: Ripper Function
FOR USE WITH: BASE + 1 (RIP)
FOR USE WITH: BASE + 2 (FL, RIP)
FOR USE WITH: BASE+3 (FL,DA1,RIP)
FOR USE WITH: BASE+4 (WM,WT-FLOAT,FL,RIP)
FOR USE WITH: BASE+4 (WM,WT,FL,RIP) NOFLT
FOR USE WITH: BASE+3 (FL,MMS,RIP)
FOR USE WITH: BASE+5 (WM,WT,DA1,FL,RIP)
FOR USE WITH: BASE+6 (WM,WT,DA1,DA2,FL,RIP)

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | OPTIONAL ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|----------------------|-----------------|----------------------|
|-----|---------|----------------------|-----------------|----------------------|

GROUND ENGAGING TOOLS

GROUND ENGAGING TOOLS

| | | | | |
|---|---------|---------------------------|----------|-------------------|
| P | 8J-1434 | TOOTH, STRAIGHT | 67 67 | \$805 \$805 NI |
|---|---------|---------------------------|----------|-------------------|

****NOTE****
 AVAIALABLE for use as NOT INSTALLED ONLY with
 Miscellaneous order for RIPPER-SCARIFIER, REAR
 using 0P-2971 140M3 MISC MATERIAL
 Ripper tooth group for rear ripper. Includes one straight shank
 with ripper tooth.
 Recommended order quantity of 2
 ONLY FOR USE WITH: RIPPER/SCARIFIER

| | | | | |
|---|---------|--|------------|-----------------------|
| P | 4K-3330 | SHANKS/TEETH, RIPPER/SCARIFIER | 152 152 | \$1,404 \$1,404 NI |
|---|---------|--|------------|-----------------------|

****NOTE****
 AVAIALABLE for use as NOT INSTALLED ONLY with
 Miscellaneous order for RIPPER-SCARIFIER, REAR
 using 0P-2971 140M3 MISC MATERIAL
 Nine shanks for ripper and scarifier combination. Utilizes
 the scarifier shank positions on a ripper and scarifier
 combination. Will work with a midmount scarifier
 ONLY FOR USE WITH: RIPPER/SCARIFIER

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | OPTIONAL ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|----------------------|-----------------|----------------------|
|-----|---------|----------------------|-----------------|----------------------|

FIELD INSTALLED ATTACHMENTS

Please refer to the Caterpillar Work Tools Price List (WT-MG) for Motor Grader work tools.

Available Through Parts Distribution

Reference numbers below are kits used to upgrade existing motor graders with new features or technology

- 463-6258 KIT, JOYSTICK,ADVANCED CONTROL**
Improves operational efficiency when utilizing ACCUGRADE or GRADE CONTROL X SLOPE.
Estimated install Hours: 2.5
Special Instructions: REHS8847
- 442-8145 KIT, ACCUMULATOR, BLADE LIFT**
Provides hydraulic lines for base functions and accumulators for the blade lift. Allows approximately 1-3" of vertical blade travel to reduce impact loads. Nitrogen/oil accumulators activated by electric switch.
Estimated install Hours: 8
Special Instructions: REHS4230
- 466-5233 KIT, EXTENSIONS, MIRROR HEATED**
9" extension from Current Mirror, adds 2 additional mirrors 1 for front visibility and 1 rear visibility. Heated to keep free of ice and snow in cold weather
Estimated install Hours: 2
- 466-5255 KIT, EXTENSIONS, MIRROR STD**
9" extension from Current Mirror, adds 2 additional mirrors, 1 for front visibility and 1 rear visibility
Estimated install Hours: 2
- 524-8603 KIT,LEFT HAND BLADE EXTENSION**
24" x 24" x 7/8" - Left Hand Blade Extension Kit for use with 12 ft. and 14 ft. Basic Moldboards.
Estimated install Hours: 1.5
- 524-8604 KIT,LEFT HAND BLADE EXTENSION**
24" x 27" x 1" - Left Hand Blade Extension Kit for use with 14 ft. Plus Moldboard.
Estimated install Hours: 1.5
- 524-8605 EXTENSION, BLADE, 24" RH**
24" x 24" x 7/8" - Right Hand Blade Extension Kit for use with 12 ft. and 14 ft. Basic Moldboards.
Estimated install Hours: 1.5
- 524-8606 EXTENSION, BLADE, 24" RH**
24" x 27" x 1" - Right Hand Blade Extension Kit for use with 14 ft. Plus Moldboard.
Estimated install Hours: 1.5
- 524-8607 KIT, SPARE RIM**
14" x 25" MP Spare Rim
Estimated install Hours: 0.5

CATERPILLAR MACHINE PRICE LIST

140M3 LR

| USE | REF NO. | OPTIONAL ATTACHMENTS | Ship Weight lbs | LIST PRICE AT DEALER |
|-----|---------|----------------------|-----------------|----------------------|
|-----|---------|----------------------|-----------------|----------------------|

FIELD INSTALLED ATTACHMENTS (CONT.)

Available Through Parts Distribution (Cont.)

| | |
|-----------------|--|
| 524-8609 | KIT, SPARE RIM 10" x 24" MP Spare Rim Estimated install Hours: 0.5 |
| 488-2192 | KIT, CIRCLE SAVER Circle Saver Estimated install Hours: 0.5 Special Instructions: REHS4230 |
| 415-3925 | KIT, FENDERS, FRONT 12/140/160M3 Tandem Front Fender Kit |
| 434-1065 | KIT, FENDERS, REAR 12M3 & 140M3 Rear Fender Kit |
| 380-3889 | KIT, HEATED GLASS, RH DOOR Right Hand Heated Door Glass Special Instructions: REHS7154 |
| 380-3885 | KIT, HEATED GLASS,WIDE FRONT Wide Front Heated Glass Special Instructions: REHS7155 |
| 380-3886 | KIT, HEATED GLASS,NARROW FRONT Narrow Front Heated Glass Special Instructions: REHS7155 |
| 473-5233 | KIT, STORAGE, CAB 12/140/160M3 Cab Storage Kit |

PACKING

MACHINE PACKING (Must Select One)

| | | | |
|----------------|---|---|--------------------|
| 0P-0251 | DOMESTIC TRUCK | 0 | NC |
| 0P-6645 | BUNDLED, LESS TIRES Ships less tires. Rims ship on a separate skid. | 0 | \$1,175 NET |

ATTACHMENT PACKING

| | | | |
|----------------|---|---|----------------|
| 0P-0210 | PACK, DOMESTIC TRUCK Use for miscellaneous material orders. | 0 | NC |
| 0P-1935 | BUNDLED FRONT LIFT GROUP Required when ordering the Not Installed Lift Group,Manual,Front REQUIRED BY: LIFT GROUP, MANUAL, FRONT NI | 0 | \$1,175 |